

Control Strategy for Microgrid Inverter under Unbalanced Grid Voltage Conditions

Guo, Xiaoqiang; Liu, Wenzhao; Zhang, X.; Geng, H.; Guerrero, Josep M.

Published in:

Proceedings of the IEEE International Symposium on Industrial Electronics, ISIE 2014

DOI (link to publication from Publisher):

[10.1109/ISIE.2014.6864987](https://doi.org/10.1109/ISIE.2014.6864987)

Publication date:

2014

Document Version

Early version, also known as pre-print

[Link to publication from Aalborg University](#)

Citation for published version (APA):

Guo, X., Liu, W., Zhang, X., Geng, H., & Guerrero, J. M. (2014). Control Strategy for Microgrid Inverter under Unbalanced Grid Voltage Conditions. In *Proceedings of the IEEE International Symposium on Industrial Electronics, ISIE 2014* (pp. 2354-2358). IEEE Press. <https://doi.org/10.1109/ISIE.2014.6864987>

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

Take down policy

If you believe that this document breaches copyright please contact us at vbn@aub.aau.dk providing details, and we will remove access to the work immediately and investigate your claim.

Control Strategy for Microgrid Inverter under Unbalanced Grid Voltage Conditions

X. Guo, W. Liu, X. Zhang
Department of Electrical Engineering
Yanshan University
Qinhuangdao, China
yeduming@163.com

H. Geng
Automation Department
Tsinghua University
Beijing, China
genghua@tsinghua.edu.cn

Josep M. Guerrero
Institute of Energy Technology
Aalborg University
Denmark
joz@et.aau.dk

Abstract—This paper presents the theoretical analysis of the inherent reason of current harmonic and power oscillation phenomena in case of operating the microgrid inverter under unbalanced grid voltage conditions. In order to flexibly control the current harmonic and power oscillation, a new stationary frame control strategy is proposed. It has a simple control structure due to no need of a phase-locked loop and voltage/current positive/negative sequence extraction calculation. The coordinate control of power and current quality is achieved, which enhances the operation performance of microgrid inverter. Finally, the performance evaluation tests are carried out under unbalanced grid voltage conditions. Results verify the effectiveness of the propose method.

Keywords—microgrid, unbalanced grid voltage; inverter, current quality, power oscillation

I. INTRODUCTION

Microgrid integrated with renewable energy system receives more and more attention around the world[1-7]. In order to achieve the flexible operation of the microgrid, many technique challenges should be dealt with, and one of the most important issues is how to ride though the short-term disturbances, especially under unbalanced grid voltage conditions. Many interesting solutions have been reported in the last decades. In general, they can be clarified into two groups. One is the rotating-frame control strategy, and the other is the stationary-frame control strategy. A dual-sequence rotating frame control solution was proposed by Song and Nam in [8], which can eliminate the active power oscillations so as to achieve the constant dc voltage. An enhanced dual-frame control was presented in [9]. The dynamic response is improved by using the decoupling network. Another interesting method was proposed in [10]. The multiple-rotating-frame control was used to mitigate the effect of the grid background harmonics. The major disadvantage of the abovementioned rotating-frame solution is complex with the high computational burden. In order to simplify the solution, Etxeberria, et al presented a single-sequence rotating frame solution [11], which had a simple control structure and fast dynamic response, but still needed the positive and negative sequence separation of voltages for the current reference calculation. On the other hand, the stationary-frame solutions are more popular due to the computational saving and easy implementation. A

significant contribution made by Rodriguez, et al is the flexible power control concept [12], which facilitates multiple choices for FRT with different current references. Another interesting improvement was reported in [13], which achieved the flexible power quality regulation by considering the instantaneous power ripples and current harmonics. It should be noted that all the abovementioned solutions require a phase-locked loop (PLL) to separate the voltage positive and negative sequence components, which is complex to design, and even might degrade the system performance[14-16].

In this paper, a new control strategy for microgrid inverter under unbalanced grid voltage conditions is proposed to achieve the flexible control of power and current quality with no need of any PLL.

II. CONTROL STRATEGY

Fig.1 illustrates the schematic diagram of inverter-based microgrid [17]. It comprises of the energy sources with optional energy storages and dc/ac inverters. The inverter may either operate in autonomous mode or in grid connected mode, and this paper will focus on the latter case.

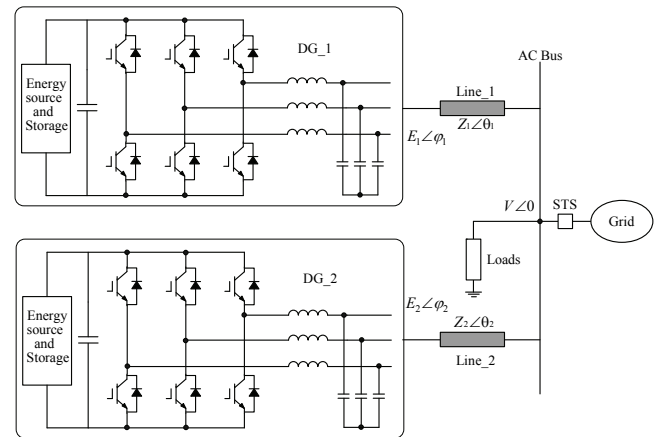


Fig.1 Schematic diagram of inverter-based microgrid

For simplicity, only one microgrid inverter is considered, as shown in Fig.2. Following will present the inherent reason for the current harmonic and power oscillation of the microgrid inverter, and then provide a new flexible control

structure for improving the current quality and power fluctuation without a PLL.

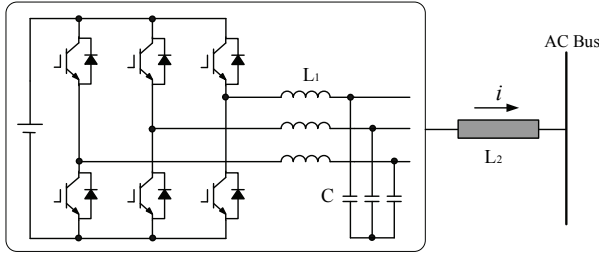


Fig.2 Schematic diagram of microgrid inverter

A. Inherent reason for current harmonics

As shown in Fig.2, three-phase ac bus voltage can be expressed as follows.

$$\begin{bmatrix} u_a \\ u_b \\ u_c \end{bmatrix} = \begin{bmatrix} U^+ \sin(\omega t + \theta_p) + U^- \sin(\omega t + \theta_n) \\ U^+ \sin(\omega t - 120^\circ + \theta_p) + U^- \sin(\omega t - 120^\circ + \theta_n) \\ U^+ \sin(\omega t + 120^\circ + \theta_p) + U^- \sin(\omega t + 120^\circ + \theta_n) \end{bmatrix} \quad (1)$$

where U^+ , U^- , θ_p , θ_n and ω represents the positive and negative sequence voltage amplitude, phase angle and frequency respectively.

With the Clarke transformation, equation (1) can be rewritten as

$$\begin{cases} \begin{bmatrix} u_\alpha \\ u_\beta \end{bmatrix} = \frac{2}{3} \begin{bmatrix} 1 & -\frac{1}{2} & -\frac{1}{2} \\ 0 & \frac{\sqrt{3}}{2} & -\frac{\sqrt{3}}{2} \end{bmatrix} \begin{bmatrix} u_a \\ u_b \\ u_c \end{bmatrix} = \begin{bmatrix} u_\alpha^+ + u_\alpha^- \\ u_\beta^+ + u_\beta^- \end{bmatrix} \\ \begin{bmatrix} u_\alpha^+ \\ u_\beta^+ \end{bmatrix} = \begin{bmatrix} U^+ \sin(\omega t + \theta_p) \\ -U^+ \cos(\omega t + \theta_p) \end{bmatrix} \\ \begin{bmatrix} u_\alpha^- \\ u_\beta^- \end{bmatrix} = \begin{bmatrix} U^- \sin(\omega t + \theta_n) \\ U^- \cos(\omega t + \theta_n) \end{bmatrix} \end{cases} \quad (2)$$

where U_α^+ , U_α^- , U_β^+ , U_β^- are the positive and negative sequence components of U_α and U_β in stationary frame, respectively.

According to the instantaneous power theory, the active and reactive power of the inverter can be expressed as [18]

$$\begin{bmatrix} p \\ q \end{bmatrix} = \frac{3}{2} \begin{bmatrix} u_\alpha & u_\beta \\ u_\beta & -u_\alpha \end{bmatrix} \begin{bmatrix} i_\alpha \\ i_\beta \end{bmatrix} \quad (3)$$

The microgrid inverter output currents can be derived from (3) as

$$\begin{bmatrix} i_\alpha \\ i_\beta \end{bmatrix} = \frac{2}{3} \begin{bmatrix} u_\alpha & u_\beta \\ u_\beta & -u_\alpha \end{bmatrix}^{-1} \begin{bmatrix} P^* \\ Q^* \end{bmatrix} \quad (4)$$

where P^* and Q^* are the inverter output active/reactive power reference respectively.

The active and reactive current can be decomposed as

$$\begin{bmatrix} i_\alpha \\ i_\beta \end{bmatrix} = \begin{bmatrix} i_{\alpha(p)} \\ i_{\beta(p)} \end{bmatrix} + \begin{bmatrix} i_{\alpha(q)} \\ i_{\beta(q)} \end{bmatrix} = \frac{2}{3} \frac{P^*}{u_\alpha^2 + u_\beta^2} \begin{bmatrix} u_\alpha \\ u_\beta \end{bmatrix} + \frac{2}{3} \frac{Q^*}{u_\alpha^2 + u_\beta^2} \begin{bmatrix} u_\beta \\ -u_\alpha \end{bmatrix} \quad (5)$$

Substituting (2) in to (5), the current components can be obtained as follows.

$$\begin{bmatrix} i_{\alpha(p)} \\ i_{\beta(p)} \end{bmatrix} = \frac{2}{3} \frac{P^*}{(u_\alpha^+ + u_\alpha^-)^2 + (u_\beta^+ + u_\beta^-)^2} \begin{bmatrix} u_\alpha^+ + u_\alpha^- \\ u_\beta^+ + u_\beta^- \end{bmatrix} \quad (6)$$

$$\begin{bmatrix} i_{\alpha(q)} \\ i_{\beta(q)} \end{bmatrix} = \frac{2}{3} \frac{Q^*}{(u_\alpha^+ + u_\alpha^-)^2 + (u_\beta^+ + u_\beta^-)^2} \begin{bmatrix} u_\beta^+ + u_\beta^- \\ -u_\alpha^+ - u_\alpha^- \end{bmatrix} \quad (7)$$

From (6) and (7), it can be observed that the inverter current is not sinusoidal if the power reference of P^* and Q^* are constant. The inherent reason is that the denominators of (6) and (7) are not constant, as shown in (8)

$$\begin{aligned} (u_\alpha^+ + u_\alpha^-)^2 + (u_\beta^+ + u_\beta^-)^2 &= (U^+)^2 + (U^-)^2 + 2u_\alpha^+ u_\alpha^- + 2u_\beta^+ u_\beta^- \\ &= (U^+)^2 + (U^-)^2 - 2U^+ U^- \cos(2\omega t + \theta_p + \theta_n) \end{aligned} \quad (8)$$

With the Fourier analysis theory, it can be concluded that the inverter current will be distorted with higher THD if the inverter power is constant. Note that IEEE Std.1547 specifies that the current THD should be less than 5%. Therefore, following will present a solution to the inverter current harmonic elimination.

B. Current harmonic elimination and power fluctuation analysis

As discussed in the previous section, the inherent reason for the inverter current harmonics comes from $2U^+ U^- \cos(2\omega t)$ in (8). Therefore, the current harmonics can be eliminated on condition that $2U^+ U^- \cos(2\omega t)$ is cancelled, which can be easily achieved with a notch filter. Then (6) and (7) can be rewritten as

$$\begin{aligned} \begin{bmatrix} i_{\alpha(p)} \\ i_{\beta(p)} \end{bmatrix} &= \frac{2}{3} \frac{P^*}{[(u_\alpha^+ + u_\alpha^-)^2 + (u_\beta^+ + u_\beta^-)^2] F(s)} \begin{bmatrix} u_\alpha^+ + u_\alpha^- \\ u_\beta^+ + u_\beta^- \end{bmatrix} = \\ &\frac{2}{3} \frac{P^*}{(U^+)^2 + (U^-)^2} \begin{bmatrix} u_\alpha^+ + u_\alpha^- \\ u_\beta^+ + u_\beta^- \end{bmatrix} \end{aligned} \quad (9)$$

$$\begin{aligned} \begin{bmatrix} i_{\alpha(q)} \\ i_{\beta(q)} \end{bmatrix} &= \frac{2}{3} \frac{Q^*}{[(u_\alpha^+ + u_\alpha^-)^2 + (u_\beta^+ + u_\beta^-)^2] F(s)} \begin{bmatrix} u_\beta^+ + u_\beta^- \\ -u_\alpha^+ - u_\alpha^- \end{bmatrix} = \\ &\frac{2}{3} \frac{Q^*}{(U^+)^2 + (U^-)^2} \begin{bmatrix} u_\beta^+ + u_\beta^- \\ -u_\alpha^+ - u_\alpha^- \end{bmatrix} \end{aligned} \quad (10)$$

$$\text{And } F(s) = (s^2 + \omega_n^2) / (s^2 + k\omega_n s + \omega_n^2)$$

In this way, the inverter current only consists of the fundamental positive and negative components, excluding the harmonic components. However, the power fluctuation will

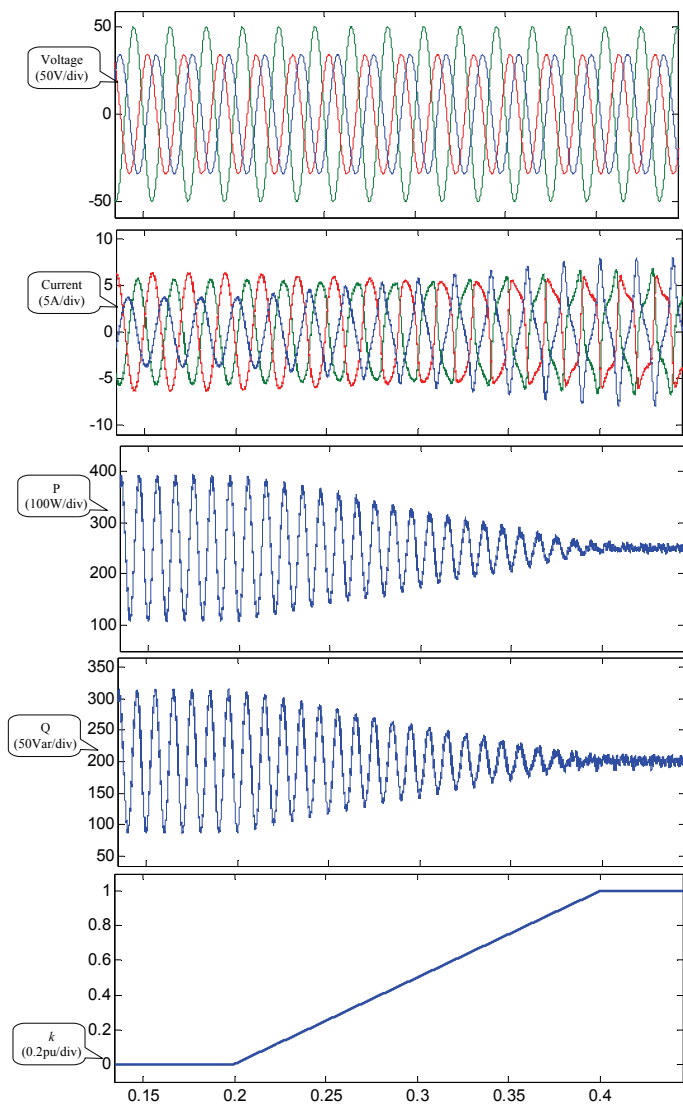


Fig.4 Simulation results of the proposed method under unbalanced grid voltage conditions. (a) ac bus voltage, (b) inverter current, (c) inverter active power, (d) inverter reactive power, (e) adjust coefficient of k

Further tests are carried out under unbalanced grid voltage conditions. As shown in Fig.5, it can be observed that the proposed work well under normal conditions. It should be noted that the abovementioned analysis and performance evaluation are carried out in grid-connected mode. For grid-forming mode with unbalanced loads, the proposed method is still valid, but a slight modification is needed to replace the current control with the droop control. Detailed analysis and experimental results would be reported in the future.

IV. CONCLUSION

This paper has presented a new control structure for operating the microgrid inverter under unbalanced grid voltage conditions. It can achieve the coordinate control of power and current quality by an adjustment coefficient and needn't any PLL. The performance evaluation results indicate that the proposed method is effective under both balanced and unbalanced grid voltage conditions. Detailed design guideline

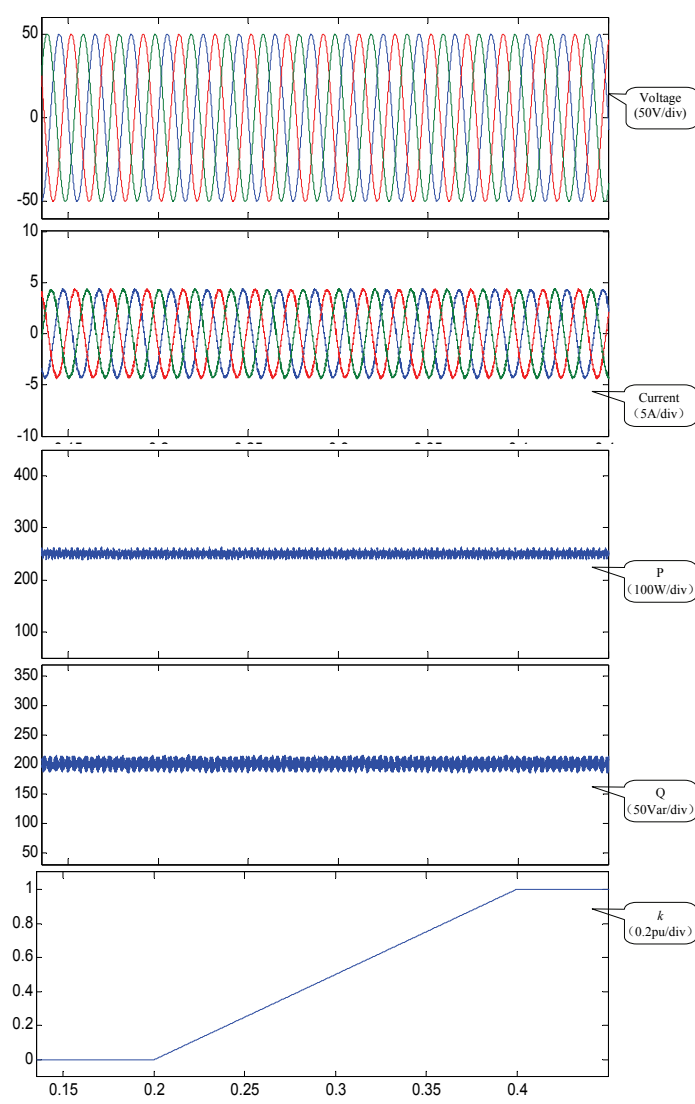


Fig.5 Simulation results of the proposed method under balanced grid voltage conditions. (a) ac bus voltage, (b) inverter current, (c) inverter active power, (d) inverter reactive power, (e) adjust coefficient of k

of the adjustment coefficient for different control objectives would be reported in the future paper.

REFERENCES

- [1] J. M. Guerrero, J. C. Vasquez, J. Matas, L. G. de Vicuña, and M. Castilla, "Hierarchical control of droop-controlled AC and DC microgrids—A general approach toward standardization," *IEEE Trans. Ind. Electron.*, vol. 58, no. 1, pp. 158–172, Jan. 2011.
- [2] J. M. Guerrero, M. Chandorkar, T. L. Lee, and P. C. Loh, "Advanced control architectures for intelligent microgrids—Part I: Decentralized and hierarchical control," *IEEE Trans. Ind. Electron.*, vol. 60, no. 4, pp. 1254–1262, Apr. 2013.
- [3] J. M. Guerrero, P. C. Loh, T. L. Lee, and M. Chandorkar, "Advanced control architectures for intelligent microgrids—Part II: Power quality, energy storage, and AC/DC microgrids," *IEEE Trans. Ind. Electron.*, vol. 60, no. 4, pp. 1263–1270, Apr. 2013.
- [4] J. He and Y. W. Li, "An enhanced microgrid load demand sharing strategy," *IEEE Trans. Power Electron.*, vol. 27, no. 9, pp. 3984–3995, Sep. 2012.

- [5] J. C. Vasquez, J. M. Guerrero, A. Luna, P. Rodriguez, and R. Teodorescu, "Adaptive droop control applied to voltage-source inverters operation in grid-connected and islanded modes," *IEEE Trans. Ind. Electron.*, vol. 56, no. 10, pp. 4088–4096, Oct. 2009.
- [6] Y. W. Li and C. N. Kao, "An accurate power control strategy for power electronics-interfaced distributed generation units operating in a low voltage multibus microgrid," *IEEE Trans. Power Electron.*, vol. 24, no. 12, pp. 2977–2988, Dec. 2009.
- [7] J. He, Y. W. Li, D. Bosnjak, and B. Harris, "Investigation and active damping of multiple resonances in a parallel-inverter-based microgrid," *IEEE Trans. Power Electron.*, vol. 28, no. 1, pp. 234–246, Jan. 2013.
- [8] H.-S. Song and K. Nam, "Dual current control scheme for PWM converter under unbalanced input voltage conditions," *IEEE Trans. Ind. Electron.*, vol. 46, no. 5, pp. 953–959, Oct. 1999.
- [9] M. Reyes, P. Rodriguez, S. Vazquez, A. Luna, R. Teodorescu, and J. M. Carrasco, "Enhanced decoupled double synchronous reference frame current controller for unbalanced grid-voltage conditions," *IEEE Trans. Power Electron.*, vol. 27, no. 9, pp. 3934–3943, Sep. 2012.
- [10] P. Xiao, K. A. Corzine, and G. K. Venayagamoorthy, "Multiple reference frame-based control of three-phase PWM boost rectifiers under unbalanced and distorted input conditions," *IEEE Trans. Power Electron.*, vol. 23, no. 4, pp. 2006–2017, Jul. 2008.
- [11] I. Etxeberria-Otadui, U. Viscarret, M. Caballero, A. Rufer, and S. Bacha, "New optimized PWM VSC control structures and strategies under unbalanced voltage transients," *IEEE Trans. Ind. Electron.*, vol. 54, no. 5, pp. 2902–2914, Oct. 2007.
- [12] P. Rodriguez, A. Timbus, R. Teodorescu, M. Liserre, and F. Blaabjerg, "Flexible active power control of distributed power generation systems during grid faults," *IEEE Trans. Ind. Electron.*, vol. 54, no. 5, pp. 2583–2592, Oct. 2007.
- [13] M. Castilla, J. Miret, J. L. Sosa, J. Matas, and L. G. Vicuna, "Grid fault control scheme for three-phase photovoltaic inverters with adjustable power quality characteristics," *IEEE Trans. Power Electron.*, vol. 25, no. 12, pp. 2930–2940, Dec. 2010.
- [14] L. Harnefors, M. Bongiorno, and S. Lundberg, "Input-admittance calculation and shaping for controlled voltage-source converters," *IEEE Trans. Ind. Electron.*, vol. 54, no. 6, pp. 3323–3334, 2007.
- [15] M. Céspedes and J. Sun, "Modeling and mitigation of harmonic resonance between wind turbines and the grid," in *Proc. 2011 IEEE ECCE*, pp. 2109–2116, Sept. 2011.
- [16] M. Céspedes and J. Sun, "Impedance shaping of three-phase grid-parallel voltage-source converters," in *Proc. 2012 IEEE APEC*, pp. 754–760, Feb. 2012.
- [17] Y. Li and Y. W. Li, "Power management of inverter interfaced autonomous microgrid based on virtual frequency-voltage frame," *IEEE Trans. Smart Grid*, vol. 2, no. 3, pp. 30–40, Mar. 2011.
- [18] H. Akagi, E. Watanabe, and M. Aredes, *Instantaneous Power Theory and Applications to Power Conditioning*. New York: IEEE Wiley, 2007.
- [19] M. Liserre, R. Teodorescu, and F. Blaabjerg, "Multiple harmonics control for three-phase grid converter systems with the use of pi-res current controller in a rotating frame," *IEEE Trans. Power Electron.*, vol. 21, no. 3, pp. 836–841, 2006.
- [20] F. Blaabjerg, R. Teodorescu, M. Liserre, and A. Timbus, "Overview of control and grid synchronization for distributed power generation systems," *IEEE Trans. Ind. Electron.*, vol. 53, no. 5, pp. 1398–1409, 2006.
- [21] R. Teodorescu, M. Liserre, and P. Rodriguez, "Grid converters for photovoltaic and wind power systems," New York: IEEE Wiley, 2011.