



AALBORG UNIVERSITY
DENMARK

Aalborg Universitet

Harmonic Resonances in Wind Power Plants

Freijedo Fernandez, Francisco Daniel; Chaudhary, Sanjay K.; Teodorescu, Remus; Guerrero, Josep M.; Bak, Claus Leth; Kocewiak, ukasz Hubert; Jensen, Christian

Published in:
PowerTech, 2015 IEEE Eindhoven

DOI (link to publication from Publisher):
[10.1109/PTC.2015.7232382](https://doi.org/10.1109/PTC.2015.7232382)

Publication date:
2015

Document Version
Early version, also known as pre-print

[Link to publication from Aalborg University](#)

Citation for published version (APA):
Fernandez, F. D. F., Chaudhary, S., Teodorescu, R., Guerrero, J. M., Bak, C. L., Kocewiak, . H., & Jensen, C. F. (2015). Harmonic Resonances in Wind Power Plants: Modeling, Analysis and Active Mitigation Methods. In PowerTech, 2015 IEEE Eindhoven (pp. 1-6). IEEE Press. DOI: 10.1109/PTC.2015.7232382

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- ? Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- ? You may not further distribute the material or use it for any profit-making activity or commercial gain
- ? You may freely distribute the URL identifying the publication in the public portal ?

Take down policy

If you believe that this document breaches copyright please contact us at vbn@aub.aau.dk providing details, and we will remove access to the work immediately and investigate your claim.

Harmonic Resonances in Wind Power Plants: Modeling, Analysis and Active Mitigation Methods

F. D. Freijedo, S. K. Chaudhary, R. Teodorescu,
J. M. Guerrero and C. L. Bak
Institute of Energy Technology, University of Aalborg,
Pontoppidanstræde 101, Aalborg 9220, Denmark.
{fran,skc,ret,joz,clb}@et.aau.dk

Ł. H. Kocewiak
Dong Energy Wind Power A/S,
Kraftværksvej 53,
Fredericia 7000, Denmark.
lukko@dongenergy.dk

C. F. Jensen
Energinet.dk,
Tonne Kjærsvej 65,
Fredericia 7000, Denmark.
CFJ@energinet.dk

Abstract—This work reviews the state-of-the-art in the field of harmonic resonance problems in Wind Power Plants (WPPs). Firstly, a generic WPP is modeled according to the equivalent circuits of its passive and active components. Main focus is put on modeling active components, i.e. the ones based on power converters. Subsequently, pros and cons of frequency and time domain analysis methods are outlined. The next sections are devoted to mitigation methods implemented in the power electronics converters. From the wind turbine perspective, different techniques to enhance the robustness of the controller are analyzed. Subsequently, the suitability for active damping of harmonics using STATCOM devices is assessed, with focus both on control techniques and power converter technologies.

Index Terms—Power conversion harmonics, power system harmonics, resonance.

I. INTRODUCTION

Wind power plants (WPPs) are usually located in remote areas, where bigger wind resources are available. In remote areas, the short-circuit power tends to be small, so the term “weak grid” is usually associated to WPP. In this scenario, voltage regulation and power quality and stability phenomena become a challenge [1].

Electric resonance is one of the most challenging scenario for WPP operation. Resonance issues arise in WPPs because their circuits contain both inductive and capacitive elements, which interact with active components [2]. From the wind energy industry perspective, this poses a collection of practical problems which can be summarized as follows [3]:

- A certain harmonic voltage or current level may be unacceptable because it results in damage to equipment, mal-operation of equipment, loss-of-life-of-equipment or other practical concerns. E.g., resonances can cause stability problems in the closed-loop controllers of grid-connected converters.
- A second type of unacceptability occurs when the limits set in the main applicable standards, such as EN-50160, IEC 61000–2–2 and IEC 61000–3–6. Furthermore, the limits set by the transmission system operators (TSOs) in the grid codes should be considered.

Therefore, WPP circuit analysis and modeling are an important topic of research in order to assess the most suitable mitigation techniques. The sections of this paper are then organized to consider firstly the origin of harmonic resonance issues and subsequently address active mitigation techniques.

II. ANALYSIS METHODS

A linear approach can be considered for frequency-domain based analyses [1], [4]–[7]. In this case, the WPP components are represented by their linear model, which may include passive components and ideal voltage/current sources. Frequency scan and harmonic power flow methods are included in this category [6]. Focusing on harmonic resonances, their frequencies correspond to the eigenvalues of the WPP circuit admittance matrix. Furthermore, overcurrent/overvoltage levels can be studied as a function of harmonic source placements [4]–[7]. A complex vector analysis (available in stationary and synchronous reference frames) is suitable to evaluate both positive and negative harmonic sequences [8]. In general, it can be stated that frequency-domain methods have a low computational burden and provide good assessments when the effect of active devices is not significant (e.g., at the transmission point of connection) [6].

However, frequency-domain analysis is not suitable for non-linear modeling. On the other hand, important phenomena is associated to non-linearities in the WPP circuit, such as core saturation in transformers [9], [10] (and generators in the case of WPP including type III wind turbines [11]), proximity and skin effects in high voltage transmission cables [12], [13] and PWM switching [6]. Time-domain based electromagnetic transient (EMT) simulation methods are better suited to assess non-linear models [1], [6]. Therefore, EMT simulation should be considered when the dynamics of the WPP (at some operation point) clearly depend on such non-linearities. EMT simulations are usually more resource-consuming than frequency domain studies [6].

III. WPP CIRCUIT MODELING

Fig. 1 shows a generic WPP circuit. Matrix notation is used to represent the three-phase system. The whole system impedance/admittance matrix is available by modeling the

This work is supported by Energinet.dk through the project “Active filter functionalities for power converters in Wind Power Plants” [Forskel program, project number 2014-1-12188 (PSO)].

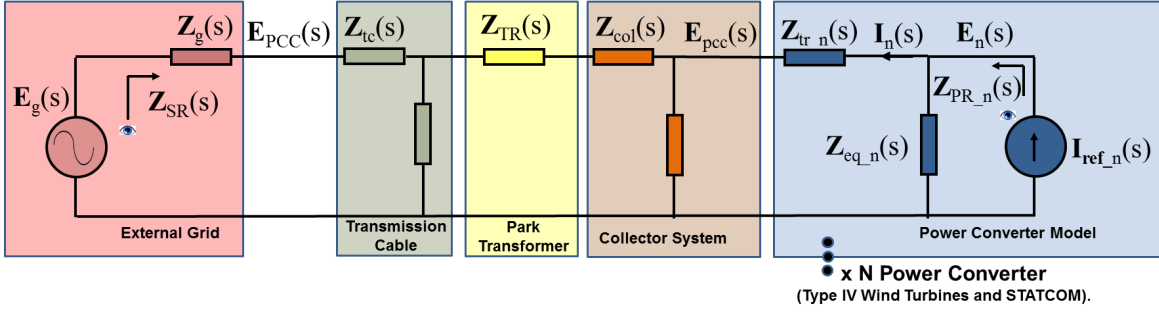


Fig. 1. WPP circuit modeling in the frequency domain. Sources and impedances are represented by vectors and matrices, respectively.

WPP components. As an example, some parallel and series resonances are also represented in Fig. 1.

- The series impedance, seen by the grid voltage source is $Z_{SR}(s)$. Assuming a diagonal system, harmonic over-currents are likely at such frequencies that the non-zero elements of $Z_{SR}(s)$ are small.
- Each current source (i.e. any power converter in the WPP) sees a parallel resonance matrix $Z_{PR_n}(s)$ (with $i = 1, 2, \dots$). Harmonic over-voltages [at $E_{pcc_n}(s)$ point] are likely for such frequencies at which $Z_{PR_n}(s)$ diagonal elements are high.
- In complex WPP, a parallel resonance can be seen as a series resonance at another point of the circuit.

Resonance phenomena arise in the transition between inductive and capacitive behavior, with resonances associated to low frequencies usually being the most problematic [2], [6]. E.g., in no loaded off-shore WPPs, low frequency resonances arises because the interaction between transformers (inductive) and cables (capacitive) [14].

Many relevant aspects of the components depicted in Fig. 1, including non-linear modeling, are addressed in the following.

A. External Grid

The external grid is represented by its Theverin equivalent, which is defined by its impedance Z_g in series with the voltage source $E_g(s)$. TSOs provide data to model the external grid in a wide range of scenarios [2].

1) *Grid Impedance Loci*: The value for the external grid impedance is provided in a grid impedance locus diagrams [2], [15], [16]. This representation bounds in sectors the potential values for $Z_g(s)$ [2]. The impedance locus is specified for different groups for harmonics. E.g., *National Grid* provides one diagram for harmonics in the range $h = [2, 5]$ and another one for higher order harmonics up to the 17th [17].

Since an impedance locus includes multiple combinations, the worst case scenarios are identified for detailed analysis. Worst cases are usually located in the boundaries [15]. A field method for grid impedance measurement is given in [16].

2) *Background Voltage Distortion*: The background voltage distortion [defined at $E_g(s)$] represents a source of harmonics in the WPP circuit. The maximum values for different harmonic orders are given by the TSO and represented in % of the fundamental voltage [15], [17].

B. Transmission Cable

The transmission cable introduces resistive, inductive and capacitive effects. The significance of the transmission cable in the WPP circuit increases with the cable length [1], [14].

Cable suppliers provide data-sheets for frequency domain modeling [12], [18]. However, detailed layouts and field data measurements better reflect the cable models [14]. Low order (lumped) impedance models can be considered with high accuracy for some studies, such as current control assessment [14], [18]. However, distributed models are more accurate when studying harmonics over a wider frequency range [12], [18]. The modeling of non-linear effects, such as skin and proximity effects, requires the use of time-domain based electromagnetic transient (EMT) simulation tools [12], [13].

C. Power Transformers

The simplest linear model for the main park transformer is obtained through its leakage inductance $Z_{TR}(s)$ and neglecting magnetization inductance and currents. However, it does not describe phenomena like core saturation (magnetizing currents) and iron losses [9]. The core losses can be modeled in a EMT simulations by updating the magnetizing reluctance as a function of the flux linkages [9], [10], [19]. Detailed EMT models permit to assess phenomena such as inrush current during wind turbine energization and grid faults, and nonlinearities of the harmonic impedance [19].

D. Collector System

Equivalent representations of the WPP collector system are made to simplify power system modeling for future developments or planned expansions [20]. The MV cable system and other components such as capacitor banks and reactive filters contribute to the collector impedance $Z_{col}(s)$. The collector topology has an influence on harmonic propagation [2]. An insightful case study for a large WPP is provided in [20].

E. Average Modeling of a Grid-Connected Power Converter

This section details how to obtain a simplified model for grid-tied converters working in the linear region. The simplified model provides a good approach of the current converter behavior as it is suitable to represent the converter impedance as seen by the other components of the circuit.

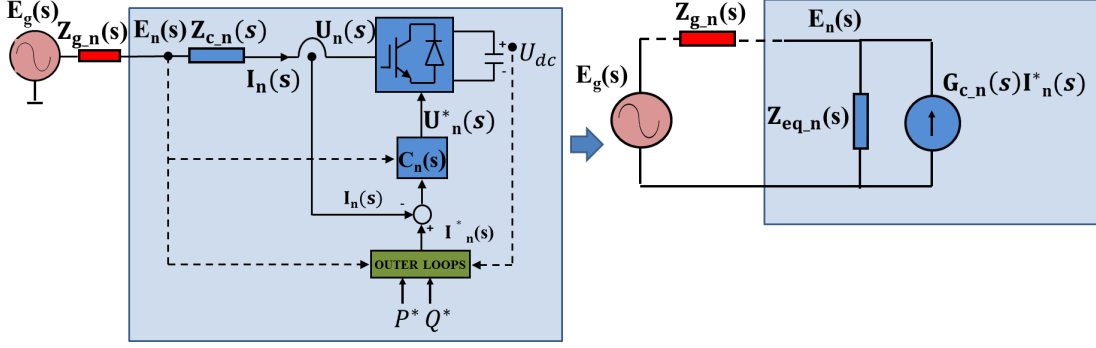


Fig. 2. Modeling of a Grid-connected power electronics converter in the WPP circuit (Fig. 1). Each converter sees its grid impedance $Z_{g_n}(s)$.

1) *Derivation of the Model:* The output current of the converter in Fig. 2 is given by

$$\mathbf{I}_n(s) = \mathbf{G}_{c_n}(s)\mathbf{I}_n^*(s) + \mathbf{Z}_{eq_n}^{(-1)}(s)\mathbf{E}_n(s) \quad (1)$$

with $\mathbf{G}_{c_n}(s)$ being the closed loop transfer function and $\mathbf{Z}_{eq_n}(s)$ the equivalent Norton impedance. These two parameters are obtained as follows. The grid current $\mathbf{I}_n(s)$ is given by

$$\mathbf{I}_n(s) = \mathbf{Z}_{c_n}^{-1}(s)[\mathbf{E}_n(s) - \mathbf{U}_n(s)] \quad (2)$$

with $\mathbf{Z}_{c_n}(s)$ being the converter output filter impedance and $\mathbf{U}_n(s)$ the output voltage. On the other hand, the converter control law is defined by

$$\mathbf{U}_n^*(s) = -\mathbf{C}_n(s)[\mathbf{I}_n^*(s) - \mathbf{I}_n(s)] \quad (3)$$

with $\mathbf{U}_n^*(s)$ being the PWM reference and $\mathbf{C}_n(s)$ the controller transfer function. If system delays (due to discrete-time operation) are neglected $\mathbf{U}_n(s) = \mathbf{U}_n^*(s)$, so the aimed expressions are obtained as follows

$$\begin{aligned} \mathbf{G}_{c_n}(s) &= \mathbf{Z}_{eq_n}^{(-1)}(s)\mathbf{C}_n(s) \quad \text{with} \\ \mathbf{Z}_{eq_n}(s) &= \mathbf{Z}_{c_n}(s) + \mathbf{C}_n(s) \end{aligned} \quad (4)$$

2) *Physical Interpretation:* For the sake of generality, the matrix expressions can be considered diagonal, which means that there is not cross-coupling between the vectors which define the three-phase system [8]. Using then a scalar nomenclature, some key aspects can be extracted from the model. The controller tends to have a high open loop gain at the low frequencies region [i.e. $\mathbf{G}_{c_n}(s) \approx \mathbf{1}$ and $|\mathbf{Z}_{eq_n}(s)| \gg |\mathbf{Z}_{c_n}(s)|$ in the control bandwidth], but it tends to behave as a passive component [i.e. $\mathbf{G}_{c_n}(s) \approx \mathbf{0}$ and $\mathbf{Z}_{eq_n}(s) \approx \mathbf{Z}_{c_n}(s)$] at higher frequencies. It should be also noted that the sign criterion for current is selected so $\mathbf{Z}_{eq_n}(s)$ is passive when the power converter is working in stable operation (see Fig. 2).

3) *Bandwidth Constraints:* The previous approach has been derived by assuming that there is not effect of the system delays. If considered

$$\mathbf{U}_n(s) = \mathbf{U}_n^*(s)e^{-sT_d} = \mathbf{U}_n^*(s)e^{-s1.5/f_s} \quad (\text{ZOH} + \text{PWM effects}) \quad (5)$$

with T_d and f_s being the system delay and sampling frequency, respectively [21]–[24]. In order to avoid the positive feedback

(instability), the bandwidth of $\mathbf{G}_{c_n}(s)$ is limited to $0.1f_s$ [23]. At the same time, f_s is limited by the PWM carrier frequency f_{pwm} . In a two-level VSC using a regular sampling PWM $f_s = f_{pwm}$ (single update) or $f_s = 2f_{pwm}$ (double update) [23]. Clearly, the former is preferred from the control perspective. An even more convenient relation between f_s and f_{pwm} can be achieved with multilevel converters [25]. On the other hand, commercial devices tend to reduce switching rates to control power losses [25], [26], so there is a clear tradeoff between control ability and power losses. Focusing on the modeling, it is clear that a good knowledge of the device is needed to accurately assess its achievable control bandwidth.

4) *Features and Limitations of the Average Modeling:* The proposed modeling is suitable to represent the power converter in the WPP as it represents its internal impedance as seen by the other components. Its main advantage is the simplicity for implementation. However, some limitations should be also considered: e.g., its accuracy will decrease as the power converter works in a non-linear region of the PWM operation (the gain of the PWM is lower than 1) [27]. The switching harmonics are neither represented, even though this should not have a high impact in resonance studies as switching frequencies tend to be high.

A detailed model of the power converter, including non-linear effects, can be obtained by dedicated EMT tools [28], [29]. Such a detailed operation is suitable to accurately represent many non-linear behavior of the power converter, such as PWM patterns representation [27]. However, this is at the cost of a higher computational burden. Therefore, in practice, the inclusion of detailed power converter models in complex power systems, such as WPPs, is not always feasible, and then simplified models are usually needed [1], [6].

IV. ACTIVE DAMPING FOR RESONANCE REJECTION

A power converter connected to the grid with electrical resonance tends to instability if there is a positive feedback of the current controller at such frequency [22], [24]. Furthermore, relative stability criteria (i.e., stability margins) are also of high importance, since systems with low stability margins are usually associated to critical overcurrents/overvoltages [22], [30]. From the control design perspective, this objective can

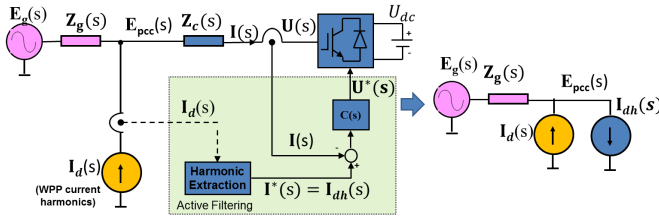


Fig. 4. Parallel active current filtering.

of many LV modules tends to increase, mainly to the need of bulky transformers and inductance filters. Multilevel MV topologies offer a better power density than LV devices, which sounds as an important feature as the WPP size increases [26]. With this perspective, power devices such as the press-pack IGBT modules have been developed to suit with multilevel MV topologies, with the Neutral Point Clamped Three Level (3L-NPC) topology being the most adopted by many manufactures [43]. In order to a higher reduction of bulky components, high voltage high power converters are gaining popularity for STATCOM applications. In this case, modular multilevel converter (MMC) topologies are the basic of the technology [44], [45]. Another advantage of HV topologies is that they offer more flexibility to be placed at many points of the WPP circuit.

TABLE I
AVAILABLE STATCOM TECHNOLOGY FOR WPP

Topology	2L-VSC	3L-NPC	MMC
Voltage Level	≤ 690 V	[1.2, 4.5] kV	[4.5, 69] kV
$S_{per\ module}$	≤ 1 MVA	$\leq 1, 60$ MVA	[50, 100] MVA

C. Active Current Filtering

Another potential functionality for the WPP is given by active filters for current harmonic compensation [38]. The digital control basics are depicted in Fig. 4 and summarized in the following. Firstly, the instantaneous distorted current I_d is measured. Then, by a signal processing algorithm the harmonic currents are identified [46], [47]. These harmonic currents feed the current controller which should assure steady-state tracking. With this purpose specific harmonic controllers, such as the ones based on resonant filters, should be implemented [32], [48]–[50]. The implementation of parallel current active filtering in the wind turbines power converter have been also proposed as a method to compensate for non-linear harmonics generation in the WPP [51], [52].

VI. HYBRID ACTIVE FILTERS

Hybrid active filters can be also consider to enhance the harmonic filtering of the WPP. Hybrid active filters are a combination of passive and active filters, where the passive filter acts as a VSC impedance [38], [53], [54]. The passive filter is tuned so it absorbs the harmonics at which it is tuned, usually the lowest and more significant ones. Then the digital controller of the VSC, compensates for current harmonics [38],

[53] or compensates the system harmonic resonances [54]. The VSC control technique for harmonic resonance damping is similar to the one explained in the previous section. The advantage of the hybrid filters is that the active part (VSC) can be rated very low in power and dc-link voltage, which permits to have a high bandwidth VSC [38], [54].

VII. CONCLUSIONS

This paper reviews many aspects of the state-of-the-art about harmonic resonances issues in WPPs. Firstly, some discussion about analysis methodology is provided: frequency domain techniques provide a good overview of the WPP circuit and it is useful for control design; however, non-linear analysis is needed to accurately represent some specific scenarios. Subsequently, key references for linear and non-linear modeling of the WPP circuit components are discussed. Among them, a simplified linear modeling for the power converter is provided. Its features and limitations of the average modeling are discussed. The next section is devoted to active damping control techniques to enhance the robustness of the power converter in the presence of harmonic resonances. Section V is devoted to the harmonic resonance damping technique by means of dedicated STATCOM device. Firstly, it is discussed how to include the harmonic damping feature in the STATCOM device. Subsequently, the existing STATCOM topologies are analyzed: one interesting outcome of this analysis points to MMC technology, which permits to handle with high voltages, high power and relatively high bandwidth at the same time.

REFERENCES

- [1] N. Strachan and D. Jovcic, "Stability of a variable-speed permanent magnet wind generator with weak AC grids," *IEEE Trans. Power Del.*, vol. 25, no. 4, pp. 2779–2788, 2010.
- [2] M. Bradt, B. Badrzadeh, E. Camm, D. Mueller, J. Schoene, T. Siebert, T. Smith, M. Starke, and R. Walling, "Harmonics and resonance issues in wind power plants," in *IEEE Power and Energy Society General Meeting*, San Diego, CA, 2011, pp. 1–8.
- [3] R. Zheng and M. Bollen, "Harmonic resonances associated with wind farms," Lulea Univ. of Technology, Skelleftea, Tech. Rep., Jul. 2010.
- [4] J. Arrillaga, D. A., and P. S. Bodger, *Power System Harmonics*. John Wiley and Sons, 1985.
- [5] W. Xu, Z. Huang, Y. Cui, and H. Wang, "Harmonic resonance mode analysis," *IEEE Trans. Power Del.*, vol. 20, no. 2, pp. 1182–1190, 2005.
- [6] B. Badrzadeh, M. Gupta, N. Singh, A. Petersson, L. Max, and M. Hogdahl, "Power system harmonic analysis in wind power plants — Part I: Study methodology and techniques," in *Industry Applications Society Annual Meeting (IAS), 2012 IEEE*, 2012, pp. 1–11.
- [7] K. Hasan, K. Rauma, A. Luna, J. Candela, and P. Rodriguez, "Harmonic compensation analysis in offshore wind power plants using hybrid filters," *IEEE Trans. Ind. Appl.*, vol. 50, no. 3, pp. 2050–2060, 2014.
- [8] L. Harnefors, "Modeling of three-phase dynamic systems using complex transfer functions and transfer matrices," *IEEE Trans. Ind. Electron.*, vol. 54, no. 4, pp. 2239–2248, 2007.
- [9] S. Abdulsalam, W. Xu, W. Neves, and X. Liu, "Estimation of transformer saturation characteristics from inrush current waveforms," *IEEE Trans. Power Del.*, vol. 21, no. 1, pp. 170–177, 2006.
- [10] W. Wiechowski, B. Bak-Jensen, C. L. Bak, and J. Lykkegaard, "Harmonic domain modelling of transformer core nonlinearities using the DIGSILENT powerfactory software," *Electrical Power Quality and Utilisation*, vol. 14, no. 1, pp. 3–11, January 2008.
- [11] J. Zhao, W. Zhang, Y. He, and J. Hu, "Modeling and control of a wind-turbine-driven dfig incorporating core saturation during grid voltage dips," in *Electrical Machines and Systems, 2008. ICEMS 2008. International Conference on*, 2008, pp. 2438–2442.

- [12] F. M. F. da Silva, "Analysis and simulation of electromagnetic transients in hvac cable transmission grids," Ph.D. dissertation, University of Aalborg, Department of Energy Technology, 2011.
- [13] U. S. Gudmundsdottir, "Proximity effect in fast transient simulations of an underground transmission cable," in *Proc. of the International Conference on Power Systems Transients*, Vancouver, Canada, 2013.
- [14] L. Kocewiak, J. Hjerrild, and C. Bak, "Wind turbine converter control interaction with complex wind farm systems," *IET Renewable Power Generation*, vol. 7, no. 4, pp. 380–389, 2013.
- [15] V. Myagkov, L. Pettersen, S. Burutxaga, L. H. Kocewiak, and F. Iov, "Parametric variation for detailed model of external grid in offshore wind farms," in *13 Wind Integration Workshop*, Berlin, Germany, 2014.
- [16] Z. Emin, F. Fernandez, M. Poeller, and G. E. Williamson, "Harmonic distortion specification and compliance of an offshore wind generation," in *10th IET International Conference on AC and DC Power Transmission*, Birmingham, UK, 2012.
- [17] National Grid, "Generator self build enduring regime harmonic assessment process flow." Tech. Report.
- [18] M. H. Bollen, S. Mousavi-Gargari, and S. Bahramirad, "Harmonic resonances due to transmission system cables," in *Proc. of the International Conference on Renewable Energies and Power Quality*, Cordoba, Spain, 2014.
- [19] N. Chiesa, "Power transformer modeling for inrush current calculation," Ph.D. dissertation, Dept. of Electric Power Engineering, Norwegian University of Science and Technology, 2010.
- [20] E. Muljadi, C. Butterfield, A. Ellis, J. Mechenbier, J. Hochheimer, R. Young, N. Miller, R. Delmerico, R. Zavadil, and J. Smith, "Equivalent the collector system of a large wind power plant," in *Power Engineering Society General Meeting, 2006. IEEE*, 2006.
- [21] F. Freijedo, A. Vidal, A. Yepes, J. Guerrero, O. Lopez, J. Malvar, and J. Doval-Gandoy, "Tuning of synchronous-frame pi current controllers in grid-connected converters operating at a low sampling rate by MIMO root locus," *IEEE Trans. Ind. Electron.*, to be published, early Access.
- [22] L. Harnefors, A. Yepes, A. Vidal, and J. Doval-Gandoy, "Passivity-based controller design of grid-connected VSCs for prevention of electrical resonance instability," *IEEE Trans. Ind. Electron.*, vol. PP, pp. 1–9, to be published, early Access.
- [23] D. G. Holmes, T. A. Lipo, B. McGrath, and W. Kong, "Optimized design of stationary frame three phase AC current regulators," *IEEE Trans. Power Electron.*, vol. 24, no. 11, pp. 2417–2426, Nov. 2009.
- [24] J. Sun, "Impedance-based stability criterion for grid-connected inverters," *IEEE Trans. Power Electron.*, vol. 26, no. 11, pp. 3075–3078, 2011.
- [25] M. Odavic, V. Biagini, M. Sumner, P. Zanchetta, and M. Degano, "Low carrier-fundamental frequency ratio PWM for multilevel active shunt power filters for aerospace applications," *IEEE Trans. Ind. Appl.*, vol. 49, no. 1, pp. 159–167, 2013.
- [26] O. Senturk, L. Helle, S. Munk-Nielsen, P. Rodriguez, and R. Teodorescu, "Power capability investigation based on electrothermal models of press-pack IGBT three-level npc and anpc vses for multimegawatt wind turbines," *IEEE Trans. Power Electron.*, vol. 27, no. 7, pp. 3195–3206, 2012.
- [27] G. Holmes and T. Lipo, *Pulse Width Modulation for Power Converters: Principles and Practices*. John Wiley & Sons, 2003.
- [28] O. Anaya-Lara and E. Acha, "Modeling and analysis of custom power systems by pscad/emtdc," *IEEE Trans. Power Del.*, vol. 17, no. 1, pp. 266–272, 2002.
- [29] M. Ciobotaru, T. Kerekes, R. Teodorescu, and A. Bouscayrol, "PV inverter simulation using matlab/simulink graphical environment and plects blockset," in *IEEE Industrial Electronics, IECON 2006 - 32nd Annual Conference on*, 2006, pp. 5313–5318.
- [30] A. Yepes, F. Freijedo, O. Lopez, and J. Doval-Gandoy, "Analysis and design of resonant current controllers for voltage-source converters by means of Nyquist diagrams and sensitivity function," *IEEE Trans. Ind. Electron.*, vol. 58, no. 11, pp. 5231–5250, 2011.
- [31] J. Dannehl, F. Fuchs, S. Hansen, and P. Thogersen, "Investigation of active damping approaches for pi-based current control of grid-connected pulse width modulation converters with LCI filters," *IEEE Trans. Ind. Appl.*, vol. 46, no. 4, pp. 1509–1517, 2010.
- [32] L. Harnefors, L. Zhang, and M. Bongiorno, "Frequency-domain passivity-based current controller design," *IET Power Electron.*, vol. 1, no. 1, pp. 455–465, 2008.
- [33] R. Pena-Alzola, M. Liserre, F. Blaabjerg, M. Ordóñez, and T. Kerekes, "A self-commissioning notch filter for active damping in a three-phase LCI -filter-based grid-tie converter," *IEEE Trans. Power Electron.*, vol. 29, no. 12, pp. 6754–6761, 2014.
- [34] J. Wells, B. Nee, P. Chapman, and P. Krein, "Selective harmonic control: a general problem formulation and selected solutions," *IEEE Trans. Power Electron.*, vol. 20, no. 6, pp. 1337–1345, 2005.
- [35] M. Dahidah, G. Konstantinou, and V. Agelidis, "A review of multilevel selective harmonic elimination PWM: Formulations, solving algorithms, implementation and applications," *IEEE Trans. Power Electron.*, to be published, early Access.
- [36] ABB, "Pcs100 statcom - abb helps one of the worlds largest wind turbine companies connect their wind turbines to the grid," ABB, Tech. Rep., 2014 (accessed).
- [37] J. Aho, R. Jessler, A. Syomushkin, and E. Catz, "Grid code compliance support for connecting renewable energy into transmission line using d-statcom system," in *CIGRE Sessions*, Paris, France, 2012.
- [38] H. Akagi, "Active harmonic filters," *Proc. IEEE*, vol. 93, no. 12, pp. 2128–2141, 2005.
- [39] H. Akagi, H. Fujita, and K. Wada, "A shunt active filter based on voltage detection for harmonic termination of a radial power distribution line," *IEEE Trans. Ind. Appl.*, vol. 35, no. 3, pp. 638–645, 1999.
- [40] X. Wang, F. Blaabjerg, M. Liserre, Z. Chen, J. He, and Y. Li, "An active damper for stabilizing power-electronics-based AC systems," *IEEE Trans. Power Electron.*, vol. 29, no. 7, pp. 3318–3329, 2014.
- [41] M. Savaghebi, A. Jalilian, J. Vasquez, and J. Guerrero, "Secondary control for voltage quality enhancement in microgrids," *IEEE Transactions on Smart Grid*, vol. 3, no. 4, pp. 1893–1902, 2012.
- [42] M. Savaghebi, J. C. Vasquez, A. Jalilian, J. M. Guerrero, and T.-L. Lee, "Selective compensation of voltage harmonics in grid-connected microgrids," *Mathematics and Computers in Simulation*, vol. 91, p. 211–228, May 2013.
- [43] S. Fazel, S. Bernet, D. Krug, and K. Jalili, "Design and comparison of 4-kV neutral-point-clamped, flying-capacitor, and series-connected H-bridge multilevel converters," *IEEE Trans. Ind. Appl.*, vol. 43, no. 4, pp. 1032–1040, 2007.
- [44] G. Adam, O. Anaya-Lara, G. Burt, D. Telford, B. Williams, and J. McDonald, "Modular multilevel inverter: Pulse width modulation and capacitor balancing technique," *IET Power Electronics*, vol. 3, no. 5, pp. 702–715, 2010.
- [45] M. Pieschel, "STATCOM with multilevel converter for AC transmission systems," in *Industry Session Presentation at IEEE APEC*, Texas, March 2014.
- [46] L. Asiminoaei, F. Blaabjerg, and S. Hansen, "Detection is key - harmonic detection methods for active power filter applications," *IEEE Ind. Appl. Mag.*, vol. 13, no. 4, pp. 22–33, 2007.
- [47] F. Freijedo, J. Doval-Gandoy, O. Lopez, P. Fernandez-Comesana, and C. Martinez-Penalver, "A signal-processing adaptive algorithm for selective current harmonic cancellation in active power filters," *IEEE Trans. Ind. Electron.*, vol. 56, no. 8, pp. 2829–2840, 2009.
- [48] I. Etxeberria-Otadui, A. Lopez De Heredia, H. Gaztanaga, S. Bacha, and M. Reyero, "A Single Synchronous Frame Hybrid (SSFH) Multi-frequency Controller for Power Active Filters," *IEEE Transactions on Industrial Electronics*, vol. 53, no. 5, pp. 1640–1648, Oct. 2006.
- [49] C. Lascu, L. Asiminoaei, I. Boldea, and F. Blaabjerg, "High performance current controller for selective harmonic compensation in active power filters," *IEEE Trans. Power Electron.*, vol. 22, no. 5, pp. 1826–1835, 2007.
- [50] L. Limongi, R. Bojoi, G. Griva, and A. Tenconi, "Digital current-control schemes," *IEEE Ind. Electron. Mag.*, vol. 3, no. 1, pp. 20–31, Mar. 2009.
- [51] M. Abolhassani, P. Enjeti, and H. Toliyat, "Integrated doubly fed electric alternator/active filter (idea), a viable power quality solution, for wind energy conversion systems," *IEEE Trans. Energy Convers.*, vol. 23, no. 2, pp. 642–650, 2008.
- [52] G. Todeschini and A. Emanuel, "Transient response of a wind energy conversion system used as active filter," *IEEE Trans. Energy Convers.*, vol. 26, no. 2, pp. 522–531, 2011.
- [53] H. Akagi and K. Iozaki, "A hybrid active filter for a three-phase 12-pulse diode rectifier used as the front end of a medium-voltage motor drive," *IEEE Trans. Power Electron.*, vol. 27, no. 1, pp. 69–77, 2012.
- [54] H. Fujita, T. Yamasaki, and H. Akagi, "A hybrid active filter for damping of harmonic resonance in industrial power systems," *IEEE Trans. Power Electron.*, vol. 15, no. 2, pp. 215–222, 2000.