



Aalborg Universitet

AALBORG UNIVERSITY  
DENMARK

$H_\infty$  / $H_2$  model reduction through dilated linear matrix inequalities

Adegas, Fabiano Daher; Stoustrup, Jakob

*Published in:*  
7th IFAC Symposium on Robust Control Design

*DOI (link to publication from Publisher):*  
[10.3182/20120620-3-DK-2025.00117](https://doi.org/10.3182/20120620-3-DK-2025.00117)

*Publication date:*  
2012

*Document Version*  
Early version, also known as pre-print

[Link to publication from Aalborg University](#)

*Citation for published version (APA):*  
Adegas, F. D., & Stoustrup, J. (2012).  $H_\infty$  / $H_2$  model reduction through dilated linear matrix inequalities. In *7th IFAC Symposium on Robust Control Design* (Vol. 7, pp. 728-733). Elsevier. <https://doi.org/10.3182/20120620-3-DK-2025.00117>

#### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

#### Take down policy

If you believe that this document breaches copyright please contact us at [vbn@aub.aau.dk](mailto:vbn@aub.aau.dk) providing details, and we will remove access to the work immediately and investigate your claim.

# $H_\infty/H_2$ Model Reduction Through Dilated Linear Matrix Inequalities <sup>\*</sup>

Fabiano D. Adegas <sup>\*</sup> Jakob Stoustrup <sup>\*</sup>

<sup>\*</sup> Dept. of Electronic Systems, Aalborg University 9220-DK Denmark  
(e-mail: fda,jakob@es.aau.dk).

---

**Abstract:** This paper presents sufficient dilated linear matrix inequalities (LMI) conditions to the  $H_\infty$  and  $H_2$  model reduction problem. A special structure of the auxiliary (slack) variables allows the original model of order  $n$  to be reduced to an order  $r = n/s$  where  $n, r, s \in \mathbb{N}$ . Arbitrary order of the reduced model can be enforced by including states in the original system with negligible input-to-output system norms. The use of dilated LMI conditions facilitates model reduction of parameter-dependent systems. When a reduced model determined by the sufficient LMI conditions does not satisfactorily approximate the original system, an iterative algorithm based on dilated LMIs is proposed to significantly improve the approximation bound. The effectiveness of the method is accessed by numerical experiments. The method is also applied to the  $H_2$  order reduction of a flexible wind turbine model.

*Keywords:* Model Reduction; LMI Optimization; Parametric Uncertainties.

---

## 1. INTRODUCTION

The model reduction problem consists on the approximation of a given asymptotically stable system by a reduced order model according to a given minimum norm criteria on the approximation error. Several techniques and norm measures were investigated, giving rise to numerically reliable algorithms. A comparison of some of the algorithms for model reduction can be found in [Gugercin and Antoulas (2000)]. This problem can be formulated as an optimization problem with rank constraints [Skelton and de Oliveira (2001)] or posed as a set of nonlinear matrix equations [Haddad and Bernstein (1989)]. Due to the inherent non-convexity of these problems, they are very difficult to solve.

More recently, model reduction has been investigated under the linear matrix inequalities (LMI) framework, facilitating the use of classical norm criteria for the reduction error like  $H_\infty$  [Ebihara and Hagiwara (2004b)] and  $H_2$ . This framework is particularly suitable to address multichannel / mixed problems as well as uncertain models [Beck et al. (1996); Wu (1996); Trofino and Coutinho (2004)]. Unfortunately, the difficulties of non-convexity remains when formulating the model reduction problem as an LMI, typically involving an additional rank constraint [Wu and Jaramillo (2002)] or resulting in bilinear matrix inequalities [Grigoriadis (1997); Assunção and Peres (1999)]. In order to circumvent the non-convexity of the problem, some authors reformulate the non-convex constraint by a linear constraint presenting a matrix variable that is fixed a priori [Trofino and Coutinho (2004); Geromel et al. (2005)]. The choice of the fixed variable influences the degree of suboptimality.

In this paper, we explore the usage of dilated (or extended) LMIs to the model reduction problem. See [Pipeleers et al. (2009)] for a survey on the history and different characterizations proposed in the literature. Dilated LMIs are composed of instrumental (slack) variables which facilitates a linear dependence of the LMI in the Lyapunov variables. This added flexibility is valuable for reducing conservatism in robust and multi-objective control. A sufficient LMI condition with a special structure of the slack variables is here proposed, allowing an original model of order  $n$  to be reduced to an order  $r = n/s$  where  $n, r, s \in \mathbb{N}$ . Arbitrary order of the reduced model can be enforced by including states in the original system with negligible input-to-output system norms. This slack variable structure is trivially extended to cope with robust and parameter-dependent model reduction. When a reduced model determined by the sufficient LMI conditions does not satisfactorily approximate the original system, an iterative algorithm based on dilated LMIs is proposed to significantly improve the approximation bound with the expense of higher computational cost. The effectiveness of the method is accessed by numerical experiments. The method is successfully applied to the  $H_2$  order reduction of a flexible wind turbine.

## 2. MODEL REDUCTION THROUGH DILATED LMI

### 2.1 Linear Time-Invariant Systems

We initially consider a stable MIMO LTI dynamical system of order  $n$  in state-space form

$$S : \begin{cases} \dot{x}(t) = Ax(t) + Bu(t) \\ y(t) = Cx(t) + Du(t) \end{cases} \quad (1)$$

where  $A \in \mathbb{R}^{n \times n}$ ,  $B \in \mathbb{R}^{n \times n_u}$ ,  $C \in \mathbb{R}^{n_y \times n}$ ,  $D \in \mathbb{R}^{n_y \times n_u}$ . We seek a model of order  $r < n$  denoted  $S_r$ .

---

<sup>\*</sup> This work was supported by the Danish Ministry of Science and Innovation under the scope of Project CASED - Concurrent Aeroservoelastic Analysis and Design of Wind Turbines.

$$S_r : \begin{cases} \dot{x}_r = A_r x_r(t) + B_r u(t) \\ y(t) = C_r x_r(t) + D_r u(t) \end{cases} \quad (2)$$

where  $A_r \in \mathbb{R}^{r \times r}$ ,  $B_r \in \mathbb{R}^{r \times n_u}$ ,  $C_r \in \mathbb{R}^{n_y \times r}$ ,  $D_r \in \mathbb{R}^{n_y \times n_u}$  such that the input-output difference between the original system  $S$  and the reduced system  $S_r$  is small in an  $H_\infty$  or  $H_2$ -norm sense. That is

$$\|S - S_r\|_{\infty \text{ or } 2} \leq \gamma \quad (3)$$

where  $\gamma$  represents the upper bound on  $H_\infty$  or  $H_2$ , depending on the context. The input-output difference of  $S$  and  $S_r$  can be represented by the following state-space description denoted  $\Delta S$

$$\Delta S : \begin{cases} \begin{bmatrix} \dot{x} \\ \dot{x}_r \end{bmatrix} = \begin{bmatrix} A & 0 \\ 0 & A_r \end{bmatrix} \begin{bmatrix} x \\ x_r \end{bmatrix} + \begin{bmatrix} B \\ B_r \end{bmatrix} u(t) \\ y_\Delta(t) = [C \ -C_r] \begin{bmatrix} x \\ x_r \end{bmatrix} + (D - D_r) u(t) \end{cases} \quad (4)$$

Hereafter, the system matrices of  $\Delta S$  are denoted  $A_\Delta$ ,  $B_\Delta$ ,  $C_\Delta$ ,  $D_\Delta$ . Our results benefit from the dilated LMI conditions for an upper bound on  $H_\infty$  [Xie (2008)] or  $H_2$  [Ebihara and Hagiwara (2004a)]. Please consult [Pipeleers et al. (2009)] and references therein for a throughout exposure of dilated LMIs; we state them already in the context of our problem.

*Lemma 1.*  $\|S - S_r\|_\infty \leq \gamma$  holds if, and only if, there exist a general auxiliary matrix  $Q$ , symmetric matrix  $X$  and a scalar  $\mu > 0$  such that

$$\begin{bmatrix} A_\Delta Q + Q^T A_\Delta^T & \star & \star & \star \\ \mu Q^T A^T - Q + X & -\mu(Q + Q^T) & \star & \star \\ C_\Delta Q & \mu C_\Delta Q & -\gamma I & \star \\ B_\Delta^T & 0 & D_\Delta^T & -\gamma I \end{bmatrix} < 0, \quad (5)$$

is satisfied.

The multiplication between the scalar  $\mu$  and matrix variables in (5) makes a line search in  $\mu$  necessary.

*Lemma 2.*  $\|S - S_r\|_2 \leq \gamma$  holds if, and only if, there exist a general auxiliary matrix  $Q$  and symmetric matrices  $X$ ,  $Z$  such that

$$\begin{bmatrix} A_\Delta Q + Q^T A_\Delta^T & \star & \star \\ -Q^T A_\Delta^T + Q - X & -(Q + Q^T) & \star \\ C_\Delta Q & -C_\Delta Q & -\gamma I \end{bmatrix} < 0, \quad (6)$$

$$\begin{bmatrix} Z & \star \\ B_\Delta & X \end{bmatrix} > 0, \quad \text{trace}(Z) < \gamma$$

is satisfied.

The previous two lemmas state conditions for analysis of  $\Delta S$ . In order to derive conditions to synthesize the reduced order matrices  $A_r, \dots, D_r$ , let the general auxiliary matrix  $Q$  be partitioned as

$$Q := \begin{bmatrix} Q_1 & Q_2 & \dots & Q_{s+1} \\ H & H & \dots & H \end{bmatrix} \quad (7)$$

where  $Q_k \in \mathbb{R}^{n \times r}$ ,  $k = 1, \dots, s+1$ ,  $H \in \mathbb{R}^{r \times r}$ , and  $r = n/s$ ,  $r, n, s \in \mathbb{N}$ . Also define new matrix variables  $\hat{A}_r$  and  $\hat{C}_r$  resulting from the nonlinear change of variables

$$\hat{A}_r := A_r H, \quad \hat{C}_r := C_r H. \quad (8)$$

With these definitions at hand, the LMI conditions for synthesis can be stated as follows.

*Theorem 3.*  $\|S - S_r\|_\infty \leq \gamma$  holds if there exist general auxiliary matrices  $Q_k$ ,  $k = 1, \dots, s+1$  and  $H$ , symmetric matrix  $X$ , general matrices  $\hat{A}_r$ ,  $B_r$ ,  $\hat{C}_r$ ,  $D_r$  and a scalar  $\mu > 0$  such that

$$\begin{bmatrix} \hat{A}_\Delta + \hat{A}_\Delta^T & \star & \star & \star \\ \mu \hat{A}_\Delta^T - Q + X & -\mu(Q + Q^T) & \star & \star \\ \hat{C}_\Delta & \mu \hat{C}_\Delta & -\gamma I & \star \\ B_\Delta^T & 0 & D_\Delta^T & -\gamma I \end{bmatrix} < 0, \quad (9a)$$

$$\hat{A}_\Delta := \begin{bmatrix} A Q_1 & A Q_2 & \dots & A Q_{s+1} \\ \hat{A}_r & \hat{A}_r & \dots & \hat{A}_r \end{bmatrix}, \quad (9b)$$

$$B_\Delta := \begin{bmatrix} B \\ B_r \end{bmatrix}, \quad D_\Delta := D - D_r$$

$$\hat{C}_\Delta := [C Q_1 - \hat{C}_r \ C Q_2 - \hat{C}_r \ \dots \ C Q_{s+1} - \hat{C}_r],$$

is satisfied. Once a solution is found, the reduced order system matrices can always be reconstructed according to

$$A_r = \hat{A}_r H^{-1}, \quad C_r = \hat{C}_r H^{-1}. \quad (10)$$

**Proof.** The LMIs (9) are obtained by trivial manipulations of (5), (7) and resorting to the nonlinear change of variables (8). To show that  $\hat{A}_r$  and  $\hat{C}_r$  can always be reconstructed according to (10),  $H$  should be invertible thus nonsingular. The fact that  $-\mu(Q + Q^T) < 0$  with  $\mu > 0$  implies nonsingularity of  $Q$ . Notice that  $H$  is the lower-right block of  $Q$  (see (7)), thus nonsingularity of  $H$  is also guaranteed.  $\square$

The same rationale can be applied to turn Lemma 2 into synthesis conditions.

*Theorem 4.*  $\|S - S_r\|_2 \leq \gamma$  holds if there exist general auxiliary matrices  $Q_k$ ,  $k = 1, \dots, s+1$  and  $H$ , symmetric matrices  $X$ ,  $Z$  and general matrices  $\hat{A}_r$ ,  $B_r$ ,  $\hat{C}_r$ ,  $D_r$  such that

$$\begin{bmatrix} \hat{A}_\Delta + \hat{A}_\Delta^T & \star & \star \\ -\hat{A}_\Delta^T + Q - X & -(Q + Q^T) & \star \\ \hat{C}_\Delta & -\hat{C}_\Delta & -\gamma I \end{bmatrix} < 0, \quad (11)$$

$$\begin{bmatrix} Z & \star \\ B_\Delta & X \end{bmatrix} > 0, \quad \text{trace}(Z) < \gamma, \quad \text{and Eq. (9b),}$$

is satisfied. Once a solution is found, the reduced order system matrices can always be reconstructed according to (10).

The chosen structure (7) of the auxiliary variable  $Q$  restrains the dimension of  $A_r$  to be  $r = n/s$ , or in words,

the order of the reduced model is an integer fraction of the order of the original model. Therefore, the order of the reduced system can be chosen smaller by redefining the partitioning of  $Q$ . For example, in the case of  $r = n/3$

$$Q := \begin{bmatrix} Q_1 & Q_2 & Q_3 & Q_4 \\ H & H & H & H \end{bmatrix} \quad (12)$$

with  $\hat{A}_\Delta$  and  $\hat{C}_\Delta$  changing accordingly

$$\begin{aligned} \hat{A}_\Delta &:= \begin{bmatrix} AQ_1 & AQ_2 & AQ_3 & AQ_4 \\ \hat{A}_r & \hat{A}_r & \hat{A}_r & \hat{A}_r \end{bmatrix}, \\ \hat{C}_\Delta &:= [CQ_1 - \hat{C}_r \quad CQ_2 - \hat{C}_r \quad CQ_3 - \hat{C}_r \quad CQ_4 - \hat{C}_r]. \end{aligned} \quad (13)$$

Being  $n$  a multiple of  $r$  limits the choice of the order of the reduced model. This fact can be circumvented by adding states on the original system  $S$  with negligible input-to-output norms. A convenient way to do so is by augmenting the system with modes appearing in the diagonal of  $A$

$$\begin{aligned} A &\rightarrow \begin{bmatrix} A & 0 \\ 0 & A_a \end{bmatrix}, \quad A_a = \text{diag}(A_{a,i}), \quad B \rightarrow \begin{bmatrix} B \\ B_a \end{bmatrix}, \\ B_a &= \begin{bmatrix} B_{a,1} \\ B_{a,2} \\ \vdots \\ B_{a,i} \end{bmatrix}, \quad C \rightarrow [C \quad C_a], \\ C_a &= [C_{a,1} \quad C_{a,2} \quad \dots \quad C_{a,i}], \quad i = 1, \dots, n_a. \end{aligned}$$

where  $\|C(sI - A)^{-1}B + D\| \gg \|C_a(sI - A_a)^{-1}B_a\|$ . An arbitrary order  $r$  can be chosen by combining both strategies.

## 2.2 Parameter Dependent Systems

The linear time invariant conditions just presented are trivially extended to cope with model reduction of parameter-dependent (PD) systems. Consider the linear PD system of order  $n$

$$S(\alpha) : \begin{cases} \dot{x}(t) = A(\alpha)x(t) + B(\alpha)u(t) \\ y(t) = C(\alpha)x(t) + D(\alpha)u(t). \end{cases} \quad (14)$$

System matrices are polytopic with respect to the parameter  $\alpha$

$$\begin{aligned} A(\alpha) &= \sum_{i=1}^{N_\alpha} \alpha_i A_i, & B(\alpha) &= \sum_{i=1}^{N_\alpha} \alpha_i B_i, \\ C(\alpha) &= \sum_{i=1}^{N_\alpha} \alpha_i C_i, & D(\alpha) &= \sum_{i=1}^{N_\alpha} \alpha_i D_i, \\ \Lambda &:= \left\{ \alpha : \sum_{i=1}^{N_\alpha} \alpha_i = 1, \alpha_i \geq 0 \right\} \end{aligned} \quad (15)$$

as well as the symmetric matrices

$$X(\alpha) = \sum_{i=1}^{N_\alpha} \alpha_i X_i, \quad Z(\alpha) = \sum_{i=1}^{N_\alpha} \alpha_i Z_i, \quad (16)$$

where  $\alpha \in \Lambda$ . The aim is to find a reduced system  $S_r(\alpha)$  with order  $r < n$  and structure analogous to (14), (15) such that  $\|S(\alpha) - S_r(\alpha)\| \leq \gamma$  for all  $\alpha \in \Lambda$ . The auxiliary matrices are considered parameter independent defined according to (7). New matrix variables  $\hat{A}_{r,i}$  and  $\hat{C}_{r,i}$  result from the nonlinear change of variables involving the reduced order matrices  $A_{r,i}$  and  $C_{r,i}$

$$\begin{aligned} \hat{A}_r(\alpha) &:= \sum_{i=1}^{N_\alpha} \alpha_i \hat{A}_{r,i}, \quad \hat{A}_{r,i} = A_{r,i}H, \\ \hat{C}_r(\alpha) &:= \sum_{i=1}^{N_\alpha} \alpha_i \hat{C}_{r,i}, \quad \hat{C}_{r,i} = C_{r,i}H, \\ &\quad i = 1, \dots, N_\alpha. \end{aligned} \quad (17)$$

*Theorem 5.*  $\|S(\alpha) - S_r(\alpha)\|_\infty \leq \gamma$  holds if there exist general auxiliary matrices  $\hat{Q}_k$ ,  $k = 1, \dots, s+1$  and  $H$ , symmetric matrices  $X_i$ , general matrices  $\hat{A}_{r,i}$ ,  $B_{r,i}$ ,  $\hat{C}_{r,i}$ ,  $D_{r,i}$  and a scalar  $\mu > 0$  such that

$$\begin{bmatrix} \hat{A}_{\Delta i} + \hat{A}_{\Delta i}^T & \star & \star & \star \\ \mu \hat{A}_{\Delta i}^T - Q + X_i & -\mu(Q + Q^T) & \star & \star \\ \hat{C}_{\Delta i} & \mu \hat{C}_{\Delta i} & -\gamma I & \star \\ B_{\Delta i}^T & 0 & D_{\Delta i}^T & -\gamma I \end{bmatrix} < 0, \quad (18a)$$

$$\begin{aligned} \hat{A}_{\Delta i} &:= \begin{bmatrix} A_i Q_1 & A_i Q_2 & \dots & A_i Q_{s+1} \\ \hat{A}_{r,i} & \hat{A}_{r,i} & \dots & \hat{A}_{r,i} \end{bmatrix}, \\ B_{\Delta i} &:= \begin{bmatrix} B_i \\ B_{r,i} \end{bmatrix}, \quad D_{\Delta i} := D_i - D_{r,i} \\ \hat{C}_{\Delta i} &:= [C_i Q_1 - \hat{C}_{r,i} \quad C_i Q_2 - \hat{C}_{r,i} \quad \dots \quad C_i Q_{s+1} - \hat{C}_{r,i}], \\ &\quad i = 1, \dots, N_\alpha, \end{aligned} \quad (18b)$$

is satisfied. Once a solution is found, the reduced order system matrices can always be reconstructed according to

$$A_{r,i} = \hat{A}_{r,i}H^{-1}, \quad C_{r,i} = \hat{C}_{r,i}H^{-1}. \quad (19)$$

*Theorem 6.*  $\|S - S_r\|_2 \leq \gamma$  holds if there exist general auxiliary matrices  $\hat{Q}_k$ ,  $k = 1, \dots, s+1$  and  $H$ , symmetric matrices  $X_i$ ,  $Z_i$  and general matrices  $\hat{A}_{r,i}$ ,  $B_{r,i}$ ,  $\hat{C}_{r,i}$ ,  $D_r$  such that

$$\begin{aligned} &\begin{bmatrix} \hat{A}_{\Delta i} + \hat{A}_{\Delta i}^T & \star & \star \\ -\hat{A}_{\Delta i}^T + Q - X_i & -(Q + Q^T) & \star \\ \hat{C}_{\Delta i} & -\hat{C}_{\Delta i} & -\gamma I \end{bmatrix} < 0, \\ &\begin{bmatrix} Z_i & \star \\ B_{\Delta i} & X_i \end{bmatrix} > 0, \quad \text{trace}(Z_i) < \gamma, \quad \text{and Eq. (18b)}, \end{aligned} \quad (20)$$

is satisfied. Once a solution is found, the reduced order system matrices can always be reconstructed according to (19).

## 2.3 Iterative Algorithm

If the reduced system does not satisfactorily approximate the dynamics of the original system, one can resort to an iterative LMI (ILMI) algorithm based on dilated LMIs to

find a better result. The reduced model resulted from the sufficient conditions just presented can be used to initialize the ILMI algorithm. The auxiliary (slack) variable  $Q$  is now considered a general matrix without any specific partitioning. The following matrices are also redefined under the ILMI context.

$$\begin{aligned}\hat{A}_{\Delta i} &:= \begin{bmatrix} A_i & 0 \\ 0 & 0 \end{bmatrix} Q + \begin{bmatrix} 0 & 0 \\ 0 & I \end{bmatrix} \begin{bmatrix} D_{r,i} & C_{r,i} \\ B_{r,i} & A_{r,i} \end{bmatrix} \begin{bmatrix} 0 & 0 \\ 0 & I \end{bmatrix} Q \\ B_{\Delta i} &:= \begin{bmatrix} B_i \\ B_{r,i} \end{bmatrix}, \quad D_{\Delta i} := D_i - D_{r,i} \\ \hat{C}_{\Delta i} &:= [C_i \ 0] Q + [-I \ 0] \begin{bmatrix} D_{r,i} & C_{r,i} \\ B_{r,i} & A_{r,i} \end{bmatrix} \begin{bmatrix} 0 & 0 \\ 0 & I \end{bmatrix} Q\end{aligned}\quad (21)$$

For a clear exposure, only the ILMI algorithm for the  $H_\infty$  model reduction is described here. The  $H_2$  case can be treated similarly. The notation  $(\cdot)^{\{j\}}$  stands for the iteration index. The algorithm solves LMI problems by successively fixing the reduced order matrices  $A_{r,i}, \dots, D_{r,i}$  at one step and the slack variable  $Q$  at another step.

*Algorithm 1.* Consider  $A_{r,i}^{\{1\}}, B_{r,i}^{\{1\}}, C_{r,i}^{\{1\}}, D_{r,i}^{\{1\}}$  as the solution of Theorem 5. Set a tolerance  $\epsilon$ ,  $j = 1$  and start to iterate:

- (1) Find  $Q^{\{j\}}$  and  $\gamma^{\{j\}}$  that solves the LMI problem:  
Minimize  $\gamma^{\{j\}}$  subject to (18a) and (21) with fixed  $A_{r,i}^{\{j\}}, \dots, D_{r,i}^{\{j\}}, i = 1, \dots, N_\alpha$ .
- (2) Find  $A_{r,i}^{\{j\}}, \dots, D_{r,i}^{\{j\}}, i = 1, \dots, N_\alpha$  and  $\gamma^{\{j\}}$  that solves the LMI problem:  
Minimize  $\gamma^{\{j\}}$  subject to (18a) and (21) with fixed  $Q^{\{j\}}, i = 1, \dots, N_\alpha$ .
- (3) If  $|\gamma^{\{j\}} - \gamma^{\{j-1\}}| < \epsilon$ , stop. Else, set  $j = j + 1$  and go to step 1.

The Lyapunov matrices  $X_i$  act as variables during the whole optimization, a benefit of using dilated LMI conditions in an iterative scheme.

### 3. NUMERICAL EXAMPLES

To solve the LMI problems, we have used the interface YALMIP [Löfberg (2004)] with semidefinite programming solver SeDuMi. Because the interest lies in finding reduced order models with minimal  $H_\infty / H_2$  norm bounds, the optimization objective *Minimize*  $\gamma$  are included in the LMI conditions just presented.

#### 3.1 Comparison With Other Results

In this subsection, some results obtained by the proposed conditions are compared with [Trofino and Coutinho (2004)] and references therein.

*Example 1* Consider an LTI system with state-space matrices (22) [Assunção and Peres (1999)] from which a first order model should be approximated in an  $H_2$ -norm sense. This example gives us a glimpse of the conservativeness of the proposed condition in face of severe order reduction (1/6 of the original system) that may occur due to partitioning the slack variable (7).

$$\begin{aligned}A &= \begin{bmatrix} 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 \\ -0.007 & -0.114 & -0.850 & -2.800 & -4.450 & -3.400 \end{bmatrix} \\ B &= [0 \ 0 \ 0 \ 0 \ 0 \ 1]^T \\ C &= [0.007 \ 0.014 \ 0 \ 0 \ 0 \ 0]\end{aligned}\quad (22)$$

We obtain  $\gamma^2 = 0.0283$  by applying Theorem 4 which is considerably close to Trofino and Coutinho (2004) ( $\gamma^2 = 0.0205$ ) and better than the results in [Assunção and Peres (1999)] ( $0.0557 \leq \gamma^2 \leq 0.0616$ ). Note that, in contrast to [Trofino and Coutinho (2004)], no matrix involved on the formulation should be chosen a priori.

*Example 2* A second-order reduced model of the uncertain system with state-space representation [Wu (1996)]

$$\begin{aligned}A(\alpha) &= \begin{bmatrix} -2 & 3 & -1 & 1 \\ 0 & -1 & 1 & 0 \\ 0 & 0 & a(\alpha) & 12 \\ 0 & 0 & 0 & -4 \end{bmatrix}, \quad B(\alpha) = \begin{bmatrix} -2.5 & b(\alpha) & -1.2 \\ 1.3 & -1 & 1 \\ 1.6 & 2 & 0 \\ -3.4 & 0.1 & 2 \end{bmatrix} \\ C &= \begin{bmatrix} -2.5 & 1.3 & 1.6 & -3.4 \\ 0 & -1 & 2 & 0.1 \\ -1.2 & 1 & 0 & 2 \end{bmatrix}, \\ a(\alpha) &= -3.5\alpha_1 - 2.5\alpha_2, \quad b(\alpha) = -0.5\alpha_1 + 0.5\alpha_2\end{aligned}$$

should be obtained in an  $H_\infty$  sense. Firstly, a parameter-independent reduced system is found by applying Theorem 5 with  $A_{r,i} = A_r, \dots, D_{r,i} = D_r, i = 1, \dots, N_\alpha$ . The minimum upper bound  $\gamma = 6.2139$  at  $\mu = 0.22$  is more conservative than [Trofino and Coutinho (2004)] ( $\gamma = 5.54$ ). The resulting reduced-order system is

$$\begin{aligned}A_r &= \begin{bmatrix} 1.8061 & 0.2829 \\ -2.5823 & -4.7980 \end{bmatrix} \\ B_r &= \begin{bmatrix} 4.1664 & -0.1741 & -4.2018 \\ -2.2297 & 0.3139 & 2.9823 \end{bmatrix} \\ C_r &= \begin{bmatrix} 0.4039 & 1.0428 \\ 5.6700 & 8.7890 \\ -5.7262 & -5.3496 \end{bmatrix} \\ D_r &= \begin{bmatrix} 1.7012 & 1.3074 & 0.9660 \\ -2.0854 & 2.3911 & 0.4805 \\ 0.7488 & 1.1724 & -2.0965 \end{bmatrix}\end{aligned}\quad (23)$$

The ILMI Algorithm 1 is initialized with system (23) in an attempt to find a reduced system that better approximates the original one. Convergence tolerance is set to  $1e-3$ . Figure 1(a) shows the convergence of  $\gamma^{\{j\}}$  for three different values of  $\mu = \{0.1, 0.22, 0.3\}$ . For  $\mu = 0.22$ , the algorithm converges after 18 iteration to  $\gamma = 3.995$ . This upper bound is considerably better than [Trofino and Coutinho (2004)]. For  $\mu = 0.1$ , the proposed algorithm finds a parameter-independent reduced model with approximation error  $\gamma = 3.578$ , less conservative than [Wu (1996)] where a parameter-dependent reduced system is determined by an alternating projection method.

A reduced model with the same parameter dependence as the original one is now desired. Therefore,  $A_r(\alpha)$  and  $B_r(\alpha)$  depends on the parameter  $\alpha$ , while  $C_r$ ,  $D_r$  are parameter independent. The sufficient LMI condition results in an upper bound  $\gamma = 6.1080$  (for  $\mu = 0.22$ ), slightly better than the parameter-independent reduced system case. When resorting to the ILMI algorithm to find a parameter-dependent reduced system, an  $H_\infty$  upper bound of  $\gamma = 3.506$  is reached for  $\mu = 0.1$ , expectedly less conservative than the parameter-independent reduced system. The convergence of the algorithm is depicted in Fig. 1(b).

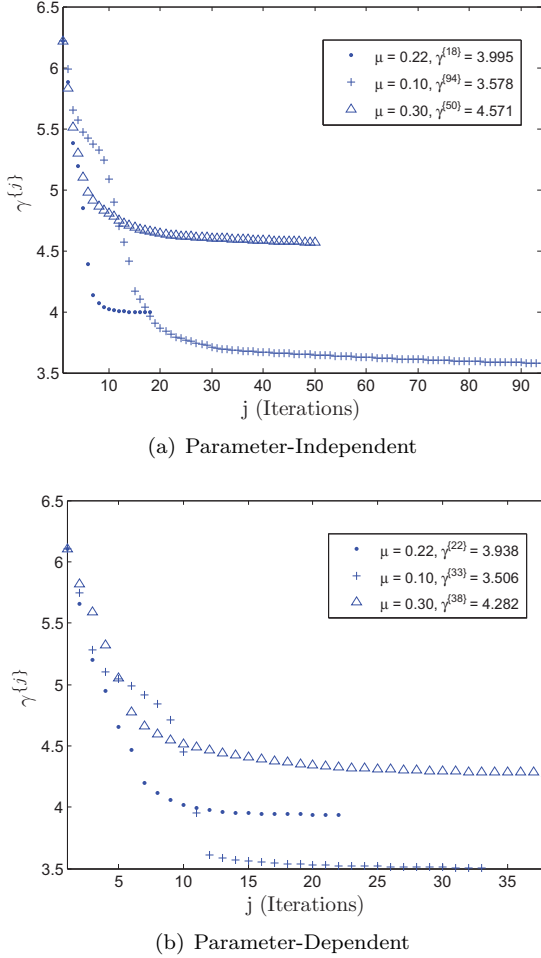


Fig. 1. Convergence of ILMI model reduction.

### 3.2 Flexible Wind Turbine

In the wind energy industry, wind turbine models are often derived from high fidelity aeroelastic numerical tools. These large-scale models are not suitable for control analysis and synthesis. The order reduction conditions here presented will be applied to an industrial wind turbine reference model generated by the recently developed aeroelastic code HAWCstab2 [Hansen (2004)]. The LTI model contains several hundreds of flexible modes and aerodynamic delays, out of reach for the current capabilities of LMI-based model order reduction techniques. Therefore, the model was initially reduced from 880 to 20 states using a  $H_2$  modal truncation method in which modes with natural frequencies higher than 4 Hz were also discarded.

The objective here is to reduce from 20 states to 10 states without compromising the quality of the model in an  $H_2$  sense. Thus,  $n = 20, s = 2, r = 10$ . Magnitude plots in frequency domain of the original and reduced models are depicted in Fig. 2(a).

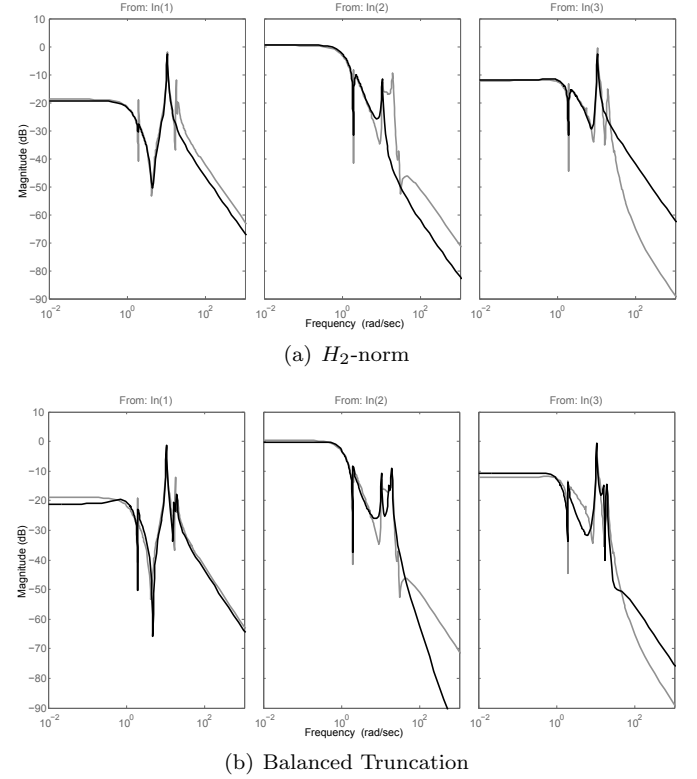


Fig. 2. Magnitude diagrams of a flexible wind turbine model with 20 states (gray) and reduced 10 states (dark).

Inputs 1 and 2 are controllable signals of generator torque and pitch angle, respectively, while input 3 is the wind speed disturbance. The output channel is the wind turbine rotational speed. Another 10 state model were derived based on the well known balanced truncation model reduction scheme using the MATLAB command *balred*. The comparison with the original model, in this case, is depicted in Fig. (2(b)). When compared to balanced truncation, the  $H_2$  measure seems to be more appropriate in approximating the low frequency range of the model.

### ACKNOWLEDGEMENTS

A special thanks to Morten Harvig Hansen from Technical University of Denmark / Department of Wind Energy for supplying us with the flexible wind turbine model. The authors also wish to thank the reviewers for their comments and suggestions that improved the quality of the paper and inspired further research.

### REFERENCES

- Assuncao, E. and Peres, P.L.D. (1999). A global optimization approach for the  $h_2$ -norm model reduction problem. In *Proc. of the 38th IEEE Conference on Decision and Control*.

- Beck, C.L., Doyle, J., and Glover, K. (1996). Model reduction of multidimensional and uncertain systems. *IEEE Transactions on Automatic Control*, 41, 1466–1477.
- Ebihara, Y. and Hagiwara, T. (2004a). New dilated lmi characterizations for continuous-time multi-objective controller synthesis. *Automatica*, 40, 2003–2009.
- Ebihara, Y. and Hagiwara, T. (2004b). On  $h_\infty$  model reduction using lmis. *IEEE Trans. Autom. Control*, 49, 1187–1191.
- Geromel, J.C., Egas, R.G., and Kawaoka, F.R.R. (2005).  $h_\infty$  model reduction with application to flexible systems. *IEEE Trans. on Automatic Control*, 50, 402–406.
- Grigoriadis, M.K. (1997).  $l_2$  and  $l_2 - l_\infty$  model reduction via linear matrix inequalities. *International Journal of Control*, 68, 485–498.
- Gugercin, S. and Antoulas, A.C. (2000). A comparative study of 7 algorithms for model reduction. In *Proceedings of the 39th IEEE Conference on Decision and Control*.
- Haddad, W.M. and Bernstein, D.S. (1989). Combined  $l_2 / h_\infty$  model-reduction,. *Int. J. Control*, 49, 1523–1535.
- Hansen, M. (2004). Aeroelastic stability analysis of wind turbines using an eigenvalue approach. *Wind Energy*, 7, 133–143.
- Löfberg, J. (2004). Yalmip : A toolbox for modeling and optimization in matlab. In *In Proceedings of the CACSD Conference*.
- Pipeleers, G., Demeulenaere, B., Swevers, J., and Vandenberghe, L. (2009). Extended lmi characterizations for stability and performance of linear systems. *Systems & Control Letters*, 58, 510–518.
- Skelton, R.E. and de Oliveira, M.C. (2001). Model reduction. In R. Brown (ed.), *The Encyclopedia of Life Support Systems*, volume II, chapter 7, 56–98. Oxford, London.
- Trofino, A. and Coutinho, D.F. (2004). Robust order reduction. In *Proc. of the American Control Conference*.
- Wu, F. (1996). Induced  $l_2$  norm model reduction of polytopic uncertain linear systems. *Automatica*, 32, 1417–1426.
- Wu, F. and Jaramillo, J. (2002). Numerical algorithm for model reduction of polytopic uncertain linear systems. In *Proc. of the American Control Conference*.
- Xie, W. (2008). An equivalent lmi representation of bounded real lemma for continuous-time systems. *Journal of Inequalities and Applications*, Article ID 672905.