

## Modelling Polarimetric Power Delay Spectrum for Indoor Wireless Channels via Propagation Graph Formalism

Adeogun, Ramoni; Pedersen, Troels

*Publication date:*  
2018

*Document Version*  
Early version, also known as pre-print

[Link to publication from Aalborg University](#)

*Citation for published version (APA):*  
Adeogun, R., & Pedersen, T. (2018). *Modelling Polarimetric Power Delay Spectrum for Indoor Wireless Channels via Propagation Graph Formalism*. Paper presented at IRACON 7th MC meeting and 7th technical meeting, Cartagena, Spain. <http://www.iracon.org/temporary-documents/7th-tm-cartagena-spain-may-30-june-1/>

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

### Take down policy

If you believe that this document breaches copyright please contact us at [vbn@aub.aau.dk](mailto:vbn@aub.aau.dk) providing details, and we will remove access to the work immediately and investigate your claim.

EUROPEAN COOPERATION  
IN SCIENCE  
AND TECHNOLOGY

CA15104 TD(18)07046  
Cartagena, Spain  
May 30 - June 1, 2018

---

EURO-COST

---

SOURCE: Aalborg University, Denmark

**Modelling Polarimetric Power Delay Spectrum for Indoor Wireless Channels via  
Propagation Graph Formalism**  
Ramoni Adeogun and Troels Pedersen

Wireless Communications Network (WCN), Department of Electronics Systems,  
Fredrik Bajers Vej 7, 9220 Aalborg, Denmark  
Phone: +4599408616  
Email: [ra,troels]@es.aau.dk

# Modelling Polarimetric Power Delay Spectrum for Indoor Wireless Channels via Propagation Graph Formalism

Ramoni Adeogun and Troels Pedersen

**Abstract**—This paper presents approximate expressions for polarimetric power delay spectrum and cross-polar power ratio via propagation graph modelling formalism. The expressions are derived considering average signal propagation in a graph. The models relate co- and cross-polar power and the power ratio to model parameters (number of scatterers, probability of visibility, reflection gain and polarization coupling parameter) thereby providing a useful approach to investigate the averaged effect of these parameters on the channel statistics. Simulation results show statistics obtained using the model and the approximate expressions match very closely.

**Index Terms**—Propagation graph, polarization, power delay spectrum, cross-polarization ratio

## I. INTRODUCTION

Propagation graphs (PGs) offer a flexible structure for modelling multilink channels with account for multiple scattering. PGs describe the channel as a directed graph with the transmitters, receivers and scatterers as vertices and interactions between vertices defined as a time-invariant transfer function. Based on the graph description, closed-form expressions for the channel transfer function is given in [1]. The graph may be generated deterministically or following a stochastic procedure as done in the example model in [1].

Several applications of the graph based model have been studied in the literature. Recently, a generalization of the model to polarized channels was presented in [2]. The authors showed via simulations that the co- and cross-polar channels exhibit different decay rates for early arrivals.

In this paper, we derive approximate expressions for predicting the polarimetric power delay spectrum (PDS) and power ratios based on average propagation on a PG. The expressions provide a simpler alternative for studying the effects of model parameters (i.e., number of scatterers, probability of visibility, reflection gain and coupling parameter) on the power delay spectrum of polarimetric channels without implementing the model.

The authors are with the Wireless Communications Network(WCN) Section, Department of Electronics Systems, Aalborg University, Denmark

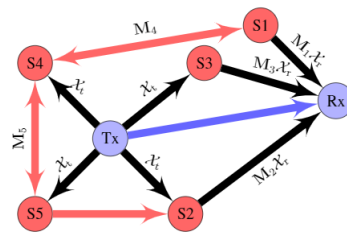


Fig. 1: PG for a polarized channel.

## II. PROPAGATION GRAPH FOR POLARIZED CHANNELS

Referring to [1] the vertices of a PG models transmitters, receivers and scatterers, and the edges model the propagation conditions between the vertices. Signals propagate along the edges and thus to each edge is associated a transfer function to account for propagation delay, phase shifts and frequency dependent attenuation etc. The scatterers sum signals on incoming edges and redistributes a scaled version of the signal on the outgoing edges. See [1] for details. In the generalization of PG based modelling to polarized channels [2] illustrated in Fig. 1, the depolarization effects is modelled via the polarimetric antenna responses,  $\mathcal{X}_{t/r}$ , in the direction of the edges and a unit norm  $2 \times 2$  coupling matrix,  $\mathbf{M}_n$ . The matrix,  $\mathbf{M}_n$ , accounts for power leakage between the polarization states due to interaction with a scatterer. These polarimetric effects are combined with other propagation mechanisms to model the edge transfer function and hence, the channel transfer function in [2]. A procedure for stochastically generating the polarimetric impulse response and hence, the PDS is presented and used for simulating polarimetric channels in [2]. An approximate expression for the PDS and XPR is described in the next section.

## III. POLARIMETRIC PDS MODEL

We approximate the full propagation graph by a much simpler graphs as depicted in Fig. 2. On average, each vertex in a PG is connected to  $(N_s - 1)P_{\text{vis}}$  scatterer

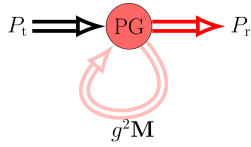


Fig. 2: Power transfer in the PGM

vertices, where  $N_s$  and  $P_{\text{vis}}$  denote the number of scatterers and the probability of visibility, respectively. To ensure power balance at a vertex, the signal on each outgoing edge of a vertex is the input scaled by  $\sqrt{(N_s - 1)P_{\text{vis}}}$ . The received signal power after  $K$  inter-scatterer interactions can be approximated as

$$P_r(k) = \frac{1}{(N_s - 1)P_{\text{vis}}} \mathcal{G}_t^T [g^2 \mathbf{M}]^k \mathbf{M} \mathcal{G}_r P_t, \quad (1)$$

where  $g$  denotes the average reflection gain.  $P_r$  and  $P_t$  are the output and input power vector, respectively. The terms  $[g^2 \mathbf{M}]^k$  and  $\mathbf{M}$  in (1) result from recursive inter-scatterer interactions and depolarization due to scatterer to receiver edges in the PG. For simplicity, we ignore the delay spread due to different edge lengths in the original PG and consider only the mean delay  $\mu_\tau$ . Then the power received at delay,  $\tau$ , after  $k = \tau/\mu_\tau$  interactions reads

$$P_r(\tau) = \frac{g^{(2\tau/\mu_\tau)}}{\text{PL}(N_s - 1)P_{\text{vis}}} \mathcal{G}_t^T \mathbf{M}^{(1+\tau/\mu_\tau)} \mathcal{G}_r P_t, \quad (2)$$

where  $\mathcal{G}_{t/r}$  denotes the transmitter/receiver antenna response averaged over all possible edge directions. PL is a normalization factor accounting for the average power decay on the transmitter to scatterer and scatterer to receiver edges. Approximating this arrival time by  $2\mu_\tau$ , PL is obtained from Friis's law as

$$\text{PL} = \frac{8\pi\mu_\tau c}{\lambda} \quad (3)$$

where  $c \approx 3 \cdot 10^8$  m/s and  $\lambda$  are the free space wave velocity and wavelength, respectively.

#### IV. RESULTS

This section presents results comparing the PDS and cross-polar ratio from the graph and approximate expression in (1) for a dual polarized channel in the frequency band, 58 GHz to 62 GHz,  $N_s = 10$ ,  $P_{\text{vis}} = 0.9$ , and  $g = 0.6$ . The polarization power coupling matrix is modelled as

$$\mathbf{M} = \frac{1}{1 + \gamma} \begin{bmatrix} 1 & \gamma \\ \gamma & 1 \end{bmatrix}; \quad 0 \leq \gamma \leq 1. \quad (4)$$

Details of the procedure for computing PDS from the PG can be found in [2]. We consider ideal dual polarized omnidirectional antenna with no antenna polarization coupling as in [2]. We therefore, represent the averaged transmit antenna response as  $\mathcal{G}_t = [1 \ 0]^T$  and the

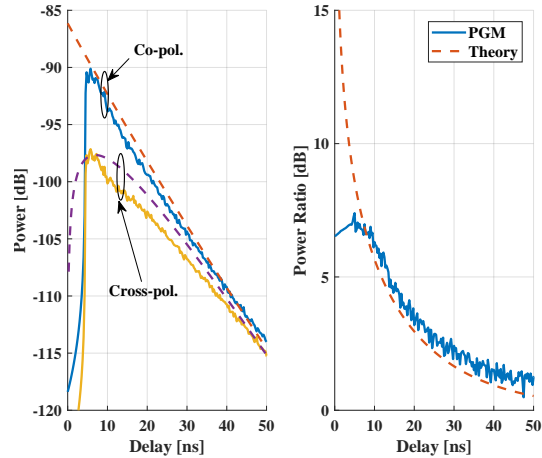


Fig. 3: Polarimetric power and power ratio from propagation graph and approximate expressions.

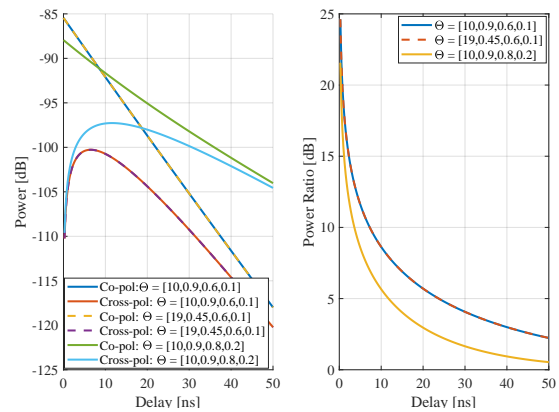


Fig. 4: Polarimetric power and power ratio with different parameters.  $\Theta$  denotes the parameter set  $[N_s, P_{\text{vis}}, g, \gamma]$ .

averaged receiver response as  $\mathcal{G}_r = [1 \ 0]^T$  and  $\mathcal{G}_r = [0 \ 1]^T$  for co- and cross-polar channels, respectively. As shown in Fig. 3, the predictions from (1) agree closely with those generated from the model. In particular, the co-polar PDS decays nearly exponentially with constant rate of decay. In the cross-polar case, the rate of decay is different. It can be seen that that ratio of the co- and cross polar PDS also follow the approximation very well. In Fig. 4, we illustrate the effects of the model parameters on the PDS and XPR. We observed that a change in the value of  $g$  results in a change in the tail decay rate of the PDS. An increase in  $\gamma$  causes a decrease in the polarization ratio. This is intuitive since the model in (4) implies that an increase in  $\gamma$  increases the power in the cross-polar channel for every interaction. Another interesting observation from Fig. 4 is that, with constant value of  $(N_s - 1)P_{\text{vis}}$ , the polarimetric PDS is not affected by changes in the values of  $P_{\text{vis}}$  and  $N_s$ .

## V. CONCLUSION

This paper summarizes a theoretical framework for predicting the polarimetric power delay spectrum and cross-polarization ratios based on average signal propagation in a propagation graph. The expressions provide a way to study the effects of model parameters on the statistics without Monte Carlo simulations involved in generating the statistics from the model. Results show that the predictions agree closely with the simulated spectrum and power ratio obtained from the model.

## VI. ACKNOWLEDGEMENTS

This work is supported by the Cooperative Research Project VIRTUOSO, funded by Intel Mobile Communications, Keysight, Telenor, Aalborg University, and Denmark Innovation Foundation. This work was performed within the framework of the COST Action CA15104 IRACON.

## REFERENCES

- [1] T. Pedersen, G. Steinbock, and B. H. Fleury, "Modeling of reverberant radio channels using propagation graphs," *IEEE Trans. Antennas Propag.*, vol. 60, no. 12, pp. 5978–5988, Dec 2012.
- [2] R. Adeogun and T. Pedersen, "Propagation graph based model for multipolarized wireless channels," in *IEEE WCNC*, April 2018.