



Aalborg Universitet

AALBORG UNIVERSITY
DENMARK

Inter-Plane Inter-Satellite Connectivity in LEO Constellations

Beam Switching vs. Beam Steering

Leyva-Mayorga, Israel; Röper, Maik; Matthiesen, Bho; Dekorsy, Armin; Popovski, Petar; Soret, Beatriz

Published in:
2021 IEEE Global Communications Conference (GLOBECOM)

DOI (link to publication from Publisher):
[10.1109/GLOBECOM46510.2021.9685842](https://doi.org/10.1109/GLOBECOM46510.2021.9685842)

Publication date:
2021

Document Version
Accepted author manuscript, peer reviewed version

[Link to publication from Aalborg University](#)

Citation for published version (APA):
Leyva-Mayorga, I., Röper, M., Matthiesen, B., Dekorsy, A., Popovski, P., & Soret, B. (2021). Inter-Plane Inter-Satellite Connectivity in LEO Constellations: Beam Switching vs. Beam Steering. In *2021 IEEE Global Communications Conference (GLOBECOM)* Article 9685842 IEEE.
<https://doi.org/10.1109/GLOBECOM46510.2021.9685842>

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

Take down policy

If you believe that this document breaches copyright please contact us at vbn@aub.aau.dk providing details, and we will remove access to the work immediately and investigate your claim.

Inter-Plane Inter-Satellite Connectivity in LEO Constellations: Beam Switching vs. Beam Steering

Israel Leyva-Mayorga*, Maik Röper[†], Bho Matthiesen^{†‡}, Armin Dekorsy[†], Petar Popovski^{*‡}, and Beatriz Soret*

*Department of Electronic Systems, Aalborg University, Aalborg, Denmark

[†]Gauss-Olbers Center, c/o University of Bremen, Dept. of Communications Engineering, Germany

[‡]University of Bremen, U Bremen Excellence Chair, Dept. of Communications Engineering, Germany

Email: {ilm, petarp, bsa}@es.aau.dk, {roeper, matthiesen, dekorsy}@ant.uni-bremen.de

Abstract—Low Earth orbit (LEO) satellite constellations rely on inter-satellite links (ISLs) to provide global connectivity. However, one significant challenge is to establish and maintain *inter-plane ISLs*, which support communication between different orbital planes. This is due to the fast movement of the infrastructure and to the limited computation and communication capabilities on the satellites. In this paper, we make use of antenna arrays with either Butler matrix beam switching networks or digital beam steering to establish the inter-plane ISLs in a LEO satellite constellation. Furthermore, we present a greedy matching algorithm to establish inter-plane ISLs with the objective of maximizing the sum of rates. This is achieved by sequentially selecting the pairs, switching or pointing the beams and, finally, setting the data rates. Our results show that, by selecting an update period of 30 seconds for the matching, reliable communication can be achieved throughout the constellation, where the impact of interference in the rates is less than 0.7 % when compared to orthogonal links, even for relatively small antenna arrays. Furthermore, doubling the number of antenna elements increases the rates by around one order of magnitude.

I. INTRODUCTION

In Low-Earth Orbit (LEO) satellite constellations, where satellites are organized in several orbital planes, implementing direct inter-satellite communication through inter-satellite links (ISLs) is the sensible choice to provide global service to delay-sensitive applications [1]. Achieving efficient inter-satellite communication is challenging since the constellation is a moving infrastructure with satellites orbiting the Earth at around 7.5 km/s. While the intra-plane ISLs, connecting satellites from the same orbital plane, are rather stable, the inter-plane ISLs, connecting satellites in different orbital planes, are greatly dynamic. Hence, connection times to potential neighbors vary widely, even in fully symmetric constellations [2]. Furthermore, the risk of collisions between satellites is minimized by orbital separation, i.e., deploying the satellites in orbital planes at slightly different altitudes [3]. Nevertheless, orbital separation leads to asymmetry in the orbital periods and to frequent changes in the relative positions of the satellites, further challenging the adaptation of the inter-plane ISLs.

The selection of a proper antenna technology is essential to achieve efficient inter-plane communication. Free-space

optical (FSO) technologies can provide high data rates, ultra-narrow beams, and reduced antenna size. However, the main challenge to achieve inter-plane communication with FSO is correctly pointing the antennas. This can be avoided by resorting to more traditional wireless technologies. Unlike the S- and C-frequency bands, employing the K- and Ka-bands also enables the use of large bandwidths and sufficiently small antenna elements to make antenna arrays feasible even for small satellites. This offers great design flexibility in terms of beamwidth, gain, and beam pointing technology.

With the advent of millimeter-wave and 5G, Butler matrix beamforming networks have gained relevance in terrestrial communications [4], [5]. These are cost-efficient and low-complexity beam switching networks that produce a series of beams in pre-defined directions [6], [7]. These beams are switched by simply feeding one or more of the input ports, which offers an interesting trade-off between performance, cost, and complexity of operation and implementation. In comparison, digital beam steering is able to precisely point the beams in the desired direction and, hence, is greatly attractive to combat the fast orbiting velocities in LEO satellite communications [8]. Nevertheless, beam steering is much more complex than switching, requiring variable phase shifters to manipulate the input signals in each antenna element.

In our previous work [1], we studied the connectivity potential of the inter-plane ISL, providing algorithms for the dynamic establishment of these links in LEO constellations with the objective of maximizing the sum of rates. We considered the extreme cases of satellites with either isotropic antennas or ultra-narrow beam antennas with perfect pointing capabilities. Once the ISLs are established, the transport capacity can be calculated [9]. However, this requires to define source-destination pairs. On the other hand, the number of ISLs in a constellation has been used as a connectivity metric to design LEO constellations [10] and the sum of rates in the ISLs can be seen as an extension of such metric. Hence, in this paper, we focus our attention on the establishment of the inter-plane ISLs with realistic models of antenna arrays fed by either a Butler matrix or by a digital beamformer with beam steering. This introduces an additional level of complexity to the matching problem, which has to pair now not simply satellites, but to switch or steer the beams to maximize the sum of rates.

This work was funded in part by the German Research Foundation (DFG) under Germany's Excellence Strategy (EXC 2077 at University of Bremen, University Allowance).

II. SYSTEM MODEL

We consider the inter-satellite transceiver matching problem in a general LEO constellation where N satellites are evenly distributed in P circular and evenly-spaced orbital planes. Each orbital plane $p \in \{1, 2, \dots, P\}$ is deployed at a given altitude above the Earth's surface h_p km, at a given longitude ϵ_p radians, at a given inclination δ , and consists of N_p evenly-spaced satellites. For notation simplicity, we define the function $p(\cdot)$ to be the orbital plane in which a satellite is deployed. We set an orbital separation Δh , which determines the difference in the altitude of contiguous orbital planes [3]. Building on this, the altitude of a given orbital plane $p > 1$ is $h_p = h_{p-1} + \Delta h$ and orbital plane $p = 1$ is deployed at the minimum altitude h_1 .

We model the constellation at any given time instant t as a weighted undirected graph $\mathcal{G}_t = (\mathcal{V}, \mathcal{E}_t)$ where \mathcal{V} is the set of vertices (satellites) and \mathcal{E}_t is the set of undirected edges (feasible inter-plane ISLs) at time t . Graph \mathcal{G} is multi-partite with P vertex classes $\mathcal{V}_1, \mathcal{V}_2, \dots, \mathcal{V}_P$. We denote an undirected edge as uv and a source-destination pair as (u, v) , where $u, v \in \mathcal{V} : p(u) \neq p(v)$. The weight of an edge uv at time t is denoted as $w_t(uv) = w_t(vu)$.

Let $\mathbf{r}_t^{(u)} = [x_t^{(u)}, y_t^{(u)}, z_t^{(u)}]^\top$ be the column vector with the cartesian coordinates of satellite u at time t . From there, Euclidean distance between two satellites, denoted as $l(u, v, t)$, can be easily calculated. Inter-satellite communication is affected by free-space path loss (FSPL), by thermal noise – which is additive white Gaussian (AWGN) [11] –, and by the interference from other satellites. In addition, the Earth blocks the line of sight (LoS) between two satellites u and v in orbital if $l(u, v, t) > l^*(p, q)$, where $l^*(p, q)$ is the maximum slant range (i.e., line-of-sight distance) between two satellites in orbital planes $p = p(u)$ and $q = p(v)$. Assuming the Earth is a perfect sphere we have

$$l^*(p, q) = \sqrt{h_p^2 + 2R_E h_p} + \sqrt{h_q^2 + 2R_E h_q}, \quad (1)$$

where R_E is the radius of the Earth.

Hence, the set of edges with no line of sight (NLoS) at time t is $\{uv \in \mathcal{E}_t : l(u, v, t) > l^*(p, q)\}$. Building on this, the FSPL between u and v when $l(u, v, t) \leq l^*(p, q)$ is given by $L(u, v, t) = \left(\frac{4\pi l(u, v, t) f}{c}\right)^2$ and is infinity otherwise. Here f is the carrier frequency and c is the speed of light.

Each satellite is equipped with two transceivers for unicast inter-plane inter-satellite communication, which allows to maintain up to one active ISL with both neighboring orbital planes. Hence, each satellite can maintain up to one inter-plane ISL at each side of the pitch axis, namely, in direction $d_a \in \{-1, 1\}$. The antennas used for inter-plane communication are located at each side of the pitch axis of the satellites. We assume that the antennas and wireless resources for intra-plane communication are independent and do not cause interference to the inter-plane ISLs and vice versa.

To calculate the antenna gains, we define $\mathbf{r}_t^{(u,v)} = [x_t^{(u,v)}, y_t^{(u,v)}, z_t^{(uv)}]^\top$ as the relative position of

satellite v w.r.t. u at time t , where $x_t^{(u,v)}$ and $y_t^{(u,v)}$ denote the position of v w.r.t. u 's pitch and roll axis, respectively.

Furthermore, we can define the relative direction of satellite v from satellite u at any time t in terms of the azimuth angle $\phi_t^{(u,v)}$ and the polar angle $\Theta_t^{(u,v)} \in [0, \pi]$. Building on this, we define set of satellites that are located in the direction of antenna d_a w.r.t. the pitch axis of satellite u at time t as $\mathcal{V}_u(d_a, t) = \{v \in \mathcal{V} : \cos(\phi_t^{(uv)}) d_a > 0\}$. That is, the antenna that must be used for communication from u to v at time t is simply given by $\cos(\phi_t^{(uv)})$.

In order to provide a high antenna gain with a low implementation complexity, we consider a planar $K \times K$ antenna array fed by a Butler matrix with $K \in 2^{\mathbb{N}}$ ports [6]. These antenna ports can be fed individually to produce K different and orthogonal beams $\mathbf{b}_k \in \mathbb{C}^{K^2 \times 1}$, for $k = \{1, 2, \dots, K\}$ along the azimuth plane [6] – along the angle ϕ –, whose elevation θ is fixed. Since there are two antenna arrays and their corresponding Butler matrices per satellite in directions $d_a \in \{-1, 1\}$, a total of $2K$ different beams can be produced at each satellite. Therefore, we denote a specific antenna port at satellite u as $k_a^{(u)} \in \{d_a, 2d_a, \dots, Kd_a\}$. The radiation pattern of the beams is defined by the number of antenna elements $K \times K$, the distance between them d_e , the wavelength $\lambda = c/f$, and the fixed elevation θ . For instance, increasing K increases the number of beams and decreases the beamwidth, which in turn increases the maximum gain.

Let $G(u, v, k_a^{(u)}, k_a^{(v)}, t)$ be the antenna gain between satellites u and v at time t , with antenna ports $k_a^{(u)}$ and $k_a^{(v)}$ at satellites u and v , respectively.

This allows us to calculate the K -dimensional steering vectors from an array in satellite u to satellite v at t for the corresponding azimuth angle as

$$\mathbf{a}_{t, \text{az}}^{(u,v)} = \left[1, e^{-\frac{j2\pi d_e}{\lambda} \sin(\phi_t^{(u,v)})}, \dots, e^{-\frac{j2\pi d_e (K-1)}{\lambda} \sin(\phi_t^{(u,v)})}\right]^\top$$

and for the polar angle as

$$\mathbf{a}_{t, \text{pol}}^{(u,v)} = \left[1, e^{-\frac{j2\pi d_e}{\lambda} \cos(\Theta_t^{(u,v)})}, \dots, e^{-\frac{j2\pi d_e (K-1)}{\lambda} \cos(\Theta_t^{(u,v)})}\right]^\top.$$

Then, the overall steering vector $\mathbf{a}^{(u,v)} \in \mathbb{C}^{K^2 \times 1}$ is given by their Kronecker product $\mathbf{a}_t^{(u,v)} = \mathbf{a}_{t, \text{pol}}^{(u,v)} \otimes \mathbf{a}_{t, \text{az}}^{(u,v)}$.

To calculate the antenna gain with Butler matrix beamforming, let $\mathbf{b}_{k, \text{az}}$ be the steering vector that denotes beam k in the azimuth plane and \mathbf{b}_{pol} be the steering vector that denotes all the beams in the elevation plane. For the elevation plane, \mathbf{b}_{pol} is the vector of length K given by the fixed polar angle θ and d_e as

$$\mathbf{b}_{\text{pol}} = \frac{1}{\sqrt{K}} \left[1, e^{-\frac{j2\pi d_e}{\lambda} \cos(\theta)}, \dots, e^{-\frac{j2\pi d_e (K-1)}{\lambda} \cos(\theta)}\right]^\top. \quad (2)$$

For the azimuth plane, the signal fed into antenna port k is precoded with the corresponding steering vector, such that the k th beam is given by [6]

$$\mathbf{b}_{k, \text{az}} = \frac{1}{\sqrt{K}} \left[1, e^{-\frac{j\pi(2k-1)}{K}}, \dots, e^{-\frac{j\pi(2k-1)(K-1)}{K}}\right]^\top. \quad (3)$$

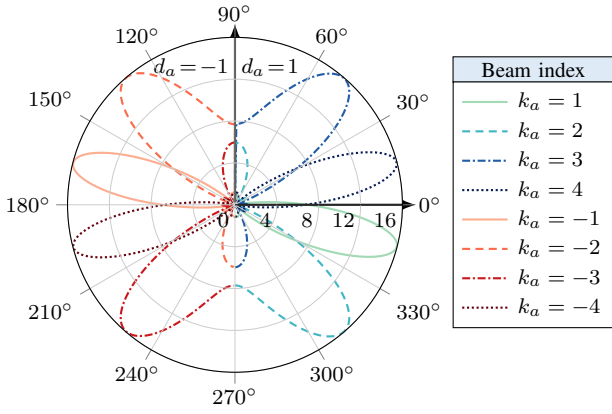


Fig. 1. Antenna gains per beam along the azimuth plane with two 4×4 Butler matrix arrays with $d_e = c/2f$.

Hence, the steering vector for the k th beam with a Butler matrix is calculated as $\mathbf{b}_k = \mathbf{b}_{\text{pol}} \otimes \mathbf{b}_{k,\text{az}}$. On the other hand, the steering vector with digital beamforming and beam steering in the direction of satellite v w.r.t. u is $\mathbf{b}_s^{(u,v)} = \mathbf{a}_t^{(u,v)}/K$.

We assume that the satellites possess sufficient shielding so that the gain of an antenna in direction d_a is 0 in the opposite direction $-d_a$; hence, no power is radiated in direction $-d_a$. Thus, the gain from u to v with beam $k_a^{(u)}$ is given as

$$g(\mathbf{r}_t^{(u,v)}, k_a^{(u)}) = \begin{cases} |\mathbf{b}_k^H \mathbf{a}_t^{(u,v)}|^2 & \text{if } \cos(\phi_t^{(u,v)}) d_a > 0 \\ 0 & \text{otherwise.} \end{cases} \quad (4)$$

Hence, both the fixed beam steering with Butler matrix and the digital beam steering lead to a maximum antenna gain of $10 \log(K^2)$ dBi. Fig 1 illustrates the radiation pattern of a 4×4 antenna array fed by a Butler matrix.

Then, the total antenna gain between satellites u and v with antenna ports $k_a^{(u)}$ and $k_a^{(v)}$, respectively, at time t is given as

$$G_t(u, k_a^{(u)}, v, k_a^{(v)}) = g(\mathbf{r}_t^{(u,v)}, k_a^{(u)}) g(\mathbf{r}_t^{(v,u)}, k_a^{(v)}) \quad (5)$$

Next, let $m_u(k_a, t) \in \{0, 1\}$ be an indicator variable that takes the value of 1 if satellite u selects antenna beam k_a (i.e., beam k of antenna d_a) for communication at time t and 0 otherwise. Thus, the signal-to-noise ratio (SNR) from satellite u to satellite $v \neq u$ at time t is given as

$$\text{SNR}(u, k_a^{(u)}, v, k_a^{(v)}, t) = \frac{P_t G_t(u, k_a^{(u)}, v, k_a^{(v)}) m_u(k_a^{(u)}, t) m_v(k_a^{(v)}, t)}{B k_B T_N L(u, v, t)} \quad (6)$$

where k_B is the Boltzmann constant, T_N is the equivalent noise temperature in Kelvin, and B is the channel bandwidth in Hertz.

The matching occurs periodically with period Δt seconds. At each realization, the satellites select their pairs, switch or steer the beam, and select the data rates in the ISL, which remain fixed until the next matching is executed.

Let $m_{uv}(t) \in \{0, 1\}$ be the matching indicator variable that takes the value of 1 if a link between satellites u and v is established at time t . That is, if there is a valid matching at time t that includes satellites u and v . Furthermore, to simplify notation, we define the matching indicator

$$m_u(d_a, t) = \sum_{v \in \mathcal{V}_u(d_a, t)} m_{uv}(t) = \sum_{k_a=d_a}^{nd_a} m_u(k_a, t), \quad (7)$$

which takes the value of 1 if the antenna array of satellite u in direction d_a has established an ISL with another satellite in the corresponding direction d_a at time t .

To find appropriate rates for each ISL, we treat the interference as additive-white Gaussian noise (AWGN). Furthermore, we consider the case where the rate for each ISL between u and v is selected as the maximum data rate that can be selected for reliable communication at the endpoints of the matching period $[t, t + \Delta t]$. Hence, rate selection for each potential ISL is performed based on the signal-to-interference plus noise ratio (SINR) at t and $t + \Delta t$ by taking the upper bound for the interference. Specifically, the upper bound SINR of the interference at time t at antenna port $k_a^{(v)}$ of the receiver v when u transmits with antenna port $k_a^{(u)}$ and for a specific set of values for the matching variables $\{m_{uv}(t)\}$ is

$$I(u, k_a^{(u)}, v, k_a^{(v)}, t) = \sum_{i=1}^N \sum_{k_a^{(i)}} \text{SNR}(i, k_a^{(i)}, v, k_a^{(v)}, t) (1 - m_{iv}(t)). \quad (8)$$

Hence, the SINR for a transmission from u to v at time t with antenna ports $k_a^{(u)}$ and $k_a^{(v)}$, respectively, is defined as

$$\text{SINR}(u, k_a^{(u)}, v, k_a^{(v)}, t) = \frac{\text{SNR}(u, k_a^{(u)}, v, k_a^{(v)}, t)}{1 + I(u, k_a^{(u)}, v, k_a^{(v)}, t)}. \quad (9)$$

Finally, the rates for communication are selected as

$$R(u, k_a^{(u)}, v, k_a^{(v)}, t, \Delta t) = B \log_2 \left(1 + \min \left\{ \text{SINR}(u, k_a^{(u)}, v, k_a^{(v)}, t), \text{SINR}(u, k_a^{(u)}, v, k_a^{(v)}, t + \Delta t) \right\} \right) \quad (10)$$

Note that the latter formulation ensures that outage periods are strictly shorter than the matching period and would only result in zero outage probability if the SINR is concave within the period $[t, t + \Delta t]$. Instead, zero outage probability can only be guaranteed by selecting the rates based on the minimum SINR over the whole matching period. However, finding the local minima for the SINR is challenging and out of the scope of this paper. If the outage probability must be further reduced, an SINR margin can be defined.

Now, we define the maximum weighted matching problem as follows.

$$\begin{aligned} \underset{\substack{\{m_{uv}(t)\} \\ \{m_u(k_a, t)\}}} \text{maximize} \quad & \sum_{u=1}^N \sum_{\substack{v=1 \\ v \neq u}}^N R(u, k_a^{(u)}, v, k_a^{(v)}, t, \Delta t) \\ & \times m_{uv}(t) m_u(k_a^{(u)}, t) m_v(k_a^{(v)}, t) \quad (11) \end{aligned}$$

$$\text{subject to} \quad m_u(d_a, t) \in \{0, 1\}, \quad \forall d_a \in \{-1, 1\}, u \in \mathcal{V} \quad (12)$$

$$m_{uv}(t) \in \{0, 1\}, \quad \forall uv \in \mathcal{E}_t, t \quad (13)$$

$$m_u(k_a, t) \in \{0, 1\}, \quad \forall u \in \mathcal{V}, k_a, t \quad (14)$$

That is, the optimization variables are the satellite pairs and their beams for communication. Note that the optimal matching is determined by the achievable rate for each ISL and also by its contribution to interference at all the other established ISLs. That is, the interference changes at each step of the matching. Because of this characteristic, our problem is that of a *matching with externalities*. Thus, an optimal algorithm to solve the matching must adapt the set of ISLs every time a new ISL is added to the matching and its interference to the other links is calculated. However, this makes the matching problem extremely complex, even though the exact positions of the satellites at any point in time are known. Instead, in the following section we describe a tractable matching algorithm to achieve a near-optimal solution.

III. SATELLITE MATCHING ALGORITHM

In this section, we describe our greedy algorithm to establish the inter-plane ISLs for the case where the satellites communicate an antenna array in each direction d_a . This algorithm generalizes and extends one of the matching algorithms presented in our previous work [1]. The extensions provided in this section w.r.t. our previous work include the realization of the matching with the data rates calculated from the worst-case SINR at every step of the matching and the mechanism to optimally switch or steer the beams per ISL. Hence, it is applicable to both cases: Butler matrix and beam steering with minor variations described at the end of this section.

The steps to establish the ISLs with a Butler matrix switching network are presented in Algorithm 1 and the resulting matching is stored in \mathcal{M}_t . Steps 1 to 3 correspond to the initialization of the parameters for the matching at time t . Specifically, the matching variables and the interference to all potential links are set to zero at steps 1 and 2. Next, the weights $w_t(uv)$ for each potential satellite pair are defined as the sum of the achievable rates, namely,

$$\begin{aligned} w_t(uv) = \max_{k_a^{(u)}, k_a^{(v)}} \left\{ \right. \\ R\left(u, k_a^{(u)}, v, k_a^{(v)}, t, \Delta t \mid m_u(k_a^{(u)}, t) m_v(k_a^{(v)}, t) = 1\right) \\ \left. + R\left(v, k_a^{(v)}, u, k_a^{(u)}, t, \Delta t \mid m_u(k_a^{(u)}, t) m_v(k_a^{(v)}, t) = 1\right) \right\}. \quad (15) \end{aligned}$$

Algorithm 1 Greedy satellite matching with multiple beams.

Input: Set of feasible weighted edges \mathcal{E}_t and $\mathcal{E}_{t+\Delta t}$

Input: Antenna array configuration: K , d_e , and θ

- 1: $\mathcal{M}_t = \emptyset$, $\{m_{uv}(t), m_u(k_a, t), m_v(k_a, t)\} \leftarrow 0$
 - 2: $I\left(u, k_a^{(u)}, v, k_a^{(v)}, t\right) = I\left(u, k_a^{(u)}, v, k_a^{(v)}, t + \Delta t\right) = 0$
for all $u, v, k_a^{(u)}, k_a^{(v)}$
 - 3: Calculate $w_t(e)$ for all $e \in \mathcal{E}_t$ as in (15)
 - 4: **while** $\mathcal{E}_t \neq \emptyset$ **do**
 - 5: $uv \leftarrow e^* : w(e^*) \geq w(e)$ for all $e \in \mathcal{E}_t$
 - 6: $\left(k_a^{(u*)}, k_a^{(v*)}\right) \leftarrow \arg \max_{(k_a^{(u)}, k_a^{(v)})} R\left(u, k_a^{(u)}, v, k_a^{(v)}\right)$
 - 7: $d_a^{(u)} = \text{sgn } k_a^{(u*)}$, $d_a^{(v)} = \text{sgn } k_a^{(v*)}$
 - 8: $\mathcal{E}_t \leftarrow \mathcal{E}_t \setminus \left\{ \{uv' \in \mathcal{V}_u(d_a^{(u)}, t)\} \cup \{v'v \in \mathcal{V}_v(d_a^{(v)}, t)\} \right\}$
 - 9: **if** $m_u(d_a^{(u)}, t) == 0$ **and** $m_v(d_a^{(v)}, t) == 0$ **then**
 - 10: $\mathcal{M}_t \leftarrow \mathcal{M}_t \cup \{u, v, k_a^{(u*)}, k_a^{(v*)}\}$
 - 11: $\left\{ m_{uv}(t), m_u(d_a^{(u)}, t), m_u(k_a^{(u*)}, t) \right\} \leftarrow 1$ **and**
 $\left\{ m_v(d_a^{(v)}, t), m_v(k_a^{(v*)}, t) \right\} \leftarrow 1$
 - 12: Update $I\left(u, k_a^{(u)}, v, k_a^{(v)}, t\right)$ **and**
 $I\left(u, k_a^{(u)}, v, k_a^{(v)}, t + \Delta t\right)$ for all $\{u, v, k_a^{(u)}, k_a^{(v)}\}$
as in (8)
 - 13: Optional: Update $w_t(e)$ for all $e \in \mathcal{E}_t$ as in (15)
 - 14: **end if**
 - 15: **end while**
- Output:** \mathcal{M}_t
-

At each iteration of the algorithm, the element in \mathcal{E}_t with the greatest weight is selected. Then the satellite pair and antenna beam pair are identified in steps 5 and 6, respectively. Next, the antenna arrays that must be used in the ISL are determined in step 7 and the satellite pairs that are no longer feasible are removed from \mathcal{E}_t in step 8. Step 9 checks if the conditions to establish the ISL are met, that is, if the antenna arrays have no other ongoing connection. If the ISL can be established, the satellites and antenna beams are added to the matching (step 10), and the matching indicator variables are updated (step 11). With the updated matching variables, the upper bound of the contribution to interference by the newly-added ISL is calculated in step 12. Step 13 is optional and allows to update the weights of the remaining feasible ISLs based on the updated interference. This process is performed until \mathcal{E}_t is empty. At the end of the matching, the rates for each ISL are calculated with the upper bound for the interference. The complexity of each iteration of Algorithm 1 is determined by the updates of the weights in step 12. There are $4N^2K^2$ possible pairs of antenna ports, hence calculating the contribution to the interference towards each of these has a complexity $\mathcal{O}(N^2K^2)$. This process must be performed each time a new ISL (i.e., pair of antenna ports) is added to the matching, which occurs $\mathcal{O}(N)$ times throughout the matching. Hence, the complexity of Algorithm 1 is $\mathcal{O}(N^3K^2)$.

For the case with digital beam steering, Algorithm 1 can be

easily modified as follows.

- 1) During initialization, calculate the optimal beam steering vector $\mathbf{b}_{d_a, \text{opt}}^{(u,v)}$ for all $uv \in \mathcal{E}_t$.
- 2) Calculate the gains for all $G_t(u, d_a^{(u)}, v, d_a^{(v)})$ by substituting \mathbf{b}_k with $\mathbf{b}_{d_a, \text{opt}}^{(u,v)}$ in (4).
- 3) Perform the matching as indicated by Algorithm 1 by setting $k_a^{(u)} = d_a$ and selecting the appropriate steering vectors $\mathbf{b}_{d_a, \text{opt}}^{(u,v)}$ and $\mathbf{b}_{d_a, \text{opt}}^{(v,u)}$ at step 7.
- 4) Skip the optional step 13.

With these modifications, the complexity of the matching algorithm for the beam steering case is reduced to $\mathcal{O}(N^3)$.

Two benchmarks were defined to assess the performance of the use of antenna arrays with Butler matrix or beam steering. The first one is the case with a half-wave dipole antenna in each direction d_a , inclined so the maximum radiation is pointed towards θ . Algorithm 1 is directly applied for the matching. The second benchmark is the case with a similar $K \times K$ antenna array in a simplified interference-free scenario.

The following key performance indicators have been defined. The main performance indicator is the average sum of data rates per matching as given by (14). To evaluate the impact of interference, we calculate the relative loss in the sum of data rates w.r.t. the simplified scenario with no interference.

Establishing the cross-seam ISLs – those between satellites in orbital planes 1 and 7 – presents a major challenge, not only for the pointing of the antennas but also due to the large Doppler shift [8]. Hence, these ISLs are disabled by default but we also evaluate the increase in the sum of rates when cross-seam ISLs are enabled.

IV. RESULTS

The parameters selected for performance evaluation are listed in Table I. A Walker star constellation is considered. The selected orbital separation of 4 km leads to 5 seconds or around 0.086% of difference between the periods of neighboring orbital planes. During the performance evaluation, it was observed that 98% of the inter-plane ISLs were established with satellites with a relative polar angle $100^\circ \pm 10^\circ$. Hence, the fixed polar angle for the Butler matrix and for the half-wave dipole was set to $\theta = 100^\circ$.

The results were obtained by simulation in Python. At each simulation instance (i.e., realization of the matching) the position of the satellites, the antenna radiation pattern, the achievable data rates, and the interference are calculated and the matching is performed as described in Algorithm 1. To obtain the results, at least 500 simulations instances per configuration were run: 10 different initial placements of the satellites were considered to account for the displacement of the orbital planes through time due to the orbital separation. Hence, at least 100 simulations were run at consecutive intervals of Δt seconds after each of the 10 initial placements.

In our experiments, the loss in the sum of rates due to interference with the Butler matrix is as low as 0.0068% with $K = 1$ and as high as 0.0306% with $K = 8$. Furthermore, the difference between performing or skipping step 13 of

TABLE I
PARAMETER SETTINGS FOR PERFORMANCE EVALUATION

Parameter	Symbol	Setting
Number of orbital planes	P	7
Number of satellites	N	140
Inclination of the orbital planes	δ	98.6°
Minimum altitude of deployment	h_1	600 km
Orbital separation	Δh	4 km
Transmission power	P_t	10 W
System bandwidth	B	200 MHz
Carrier frequency	f	20 GHz
Noise temperature	T_N	324.81 K
Matching period	Δt	{10, 30, 60} s
Number of antenna ports/beams	K	{1, 2, 4, 8}
Polar angle for Butler matrix and dipole	θ	100°
Distance between antenna elements	d_e	$c/2f$

TABLE II
AVERAGE SUM OF RATES WITH DIFFERENT ANTENNA CONFIGURATIONS

	Average sum of rates (Mbps)		
	$\Delta t = 10$	$\Delta t = 30$	$\Delta t = 60$
Isotropic ($K = 1$)	1.23527	0.7568	0.5135
Dipole	3.1164	1.8727	1.3345
Butler matrix			
$K = 2$	10.9524	7.2658	5.1212
$K = 4$	102.4879	72.3870	53.5573
$K = 8$	706.6720	601.5892	477.9366
Beam steering			
$K = 2$	18.7919	10.9284	7.7027
$K = 4$	265.0107	154.5756	107.9056
$K = 8$	3073.3669	1943.3217	1347.3270

Algorithm 1 was lower than 0.0008% and no conclusive results were obtained on which version of Algorithm 1 results in higher rates. For digital beam steering, the loss due to interference is concave with a maximum of 0.6115% at $K = 8$.

As a starting point, Table II shows the average sum of rates with different numbers of antenna ports K and matching periods Δt . The results with the half-wave dipole antenna and with an isotropic antenna (i.e., $K = 1$) are also included.

It is clear from Table II that the sum of rates increases rapidly with K and that any $K > 1$ outperforms case with the dipole antenna. In particular, with the Butler matrix, doubling the number of antennas increases the rates by nearly one order of magnitude and an even greater increase is observed with digital beam steering. The reason for this is that, as the beams become narrower, the pointing precision becomes more important and digital beam steering is capable of precisely pointing the beam to achieve the greatest gain in the links. As a consequence, the benefits of digital beam steering w.r.t. beam switching with the Butler matrix increase with K but so does the complexity of the matching. However, the matching algorithm does not increase the computational load in the satellites, as all the settings can be computed in a centralized manner and simply distributed throughout the constellation.

Table II also shows that the sum of rates increases rapidly by decreasing the matching period. Specifically, the sum of

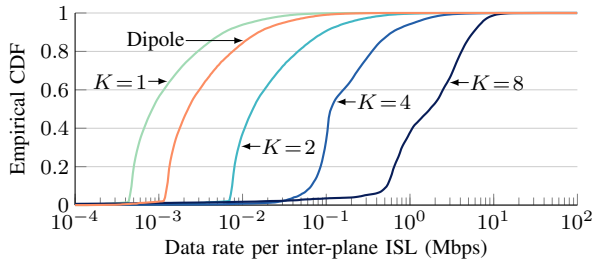


Fig. 2. CDF of the selected data rates per ISL with Butler matrix having $K = \{1, 2, 4, 8\}$ antenna ports and a half-wave dipole antenna for $\Delta t = 30$ s.

rates with $\Delta t = 10$ s is approximately twice the sum of rates with $\Delta t = 60$ s in most cases. This is because the highest rates are achieved near the crossing points of the orbits, where the relative positions change rapidly and where shorter matching periods allow to select higher rates. Despite its benefits, Δt cannot be reduced arbitrarily as frequent link switching may cause problems, for instance, when implementing a routing algorithm. Furthermore, establishing an ISL requires, at least, a handshake between the involved satellites, whose time to complete lies in the order of 20 ms round-trip due to the propagation delay between the satellites in the considered constellation. Hence, the control overhead increases as Δt decreases and a lower limit for Δt must be established.

Next, Fig. 2 shows the CDF of the rates per ISL for the Butler matrix with $K = \{1, 2, 4, 8\}$ and for the half-wave dipole antenna for $\Delta t = 30$ s. Clearly, the rates per ISL increase with K in a similar proportion as the sum of rates. Furthermore, with $K = 8$, less than 5% of the ISLs achieve a rate lower than 300 kbps and less than 5% achieve a rate higher than 7.5 Mbps. In contrast, the difference between the highest and lowest rates with $K = 1$ is much greater. Finally, the rates with the half-wave dipole antenna are, as expected, only slightly higher than those for $K = 1$.

Lastly, we investigate the effect of enabling the cross-seam ISLs in the sum of rates. Here, the potential effect of the Doppler shift is neglected to focus on beam steering. Fig. 3 shows the relative increase in the sum of rates for $K = \{4, 8\}$ and $\Delta t = \{10, 30, 60\}$ s with enabled cross-seam ISLs w.r.t. to the baseline scenario where these are disabled. Note that 1) the gains of enabling the cross-seams ISLs increase as Δt decreases and 2) the gains with $K = 4$ are greater than with $K = 8$. The reason for these is that these satellites in cross-seam ISLs are moving in nearly different directions and reach relative velocities of up to 12 km/s. Consequently 1) the SINR in the links changes rapidly and shorter matching periods allow to select higher rates and 2) wider beams are better suited to connect satellites with such high relative velocities. Specifically, the sum of rates with $K = 4$ increased 4.7% and 5.6% with $\Delta t = 10$ s for the Butler matrix and for digital beam steering, respectively. On the other hand, the maximum gain with $K = 8$ is 5.2%. Finally, the gains are, in most cases, greater with the Butler matrix than with digital beam steering, as the latter allows for an optimal placement of the beams. Nevertheless, an increase in the sum of rates of 5% is modest

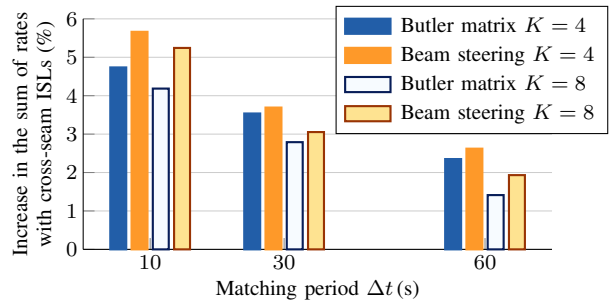


Fig. 3. Sum rate increase due to enabling cross-seam ISLs for the Butler matrix and digital beam steering with $K = \{4, 8\}$ and for $\Delta t = \{10, 30, 60\}$.

and may be further reduced due to Doppler shift.

V. CONCLUSION

In this paper, we investigated the benefits of antenna arrays with either beam switching with Butler matrix or digital beam steering for the inter-plane ISLs in LEO satellite constellations. Furthermore, we presented a matching algorithm that: 1) takes into account interference; 2) is applicable to cases where numerous beams and/or antenna ports are available per antenna; and 3) does not increase the computational load in the satellites. Our results show how increasing the number of antenna elements and decreasing the matching period increases performance. Furthermore, we observed that the cross-seam ISLs can only be established efficiently by defining a sufficiently short matching period. However, the increase in the sum of rates by establishing cross-seam ISLs is only 5%. Finally, we observed that the impact of interference on the performance in the selected scenario is minimal.

REFERENCES

- [1] I. Leyva-Mayorga, B. Soret, and P. Popovski, "Inter-plane inter-satellite connectivity in dense LEO constellations," *IEEE Trans. Wireless Commun.*, vol. 20, no. 6, pp. 3430–3443, 2021.
- [2] I. F. Akyildiz and A. Kak, "The Internet of Space Things/CubeSats: A ubiquitous cyber-physical system for the connected world," *Comput. Netw.*, vol. 150, no. 2019, pp. 134–149, 2019.
- [3] J. S. H.G. Lewis, T. Maclay and M. Lindsay, "Long-term environmental effects of deploying the OneWeb satellite constellation," in *Proc. Int. Astronautical Congress (IAC)*, 2019.
- [4] C.-C. Chang, R.-H. Lee, and T.-Y. Shih, "Design of a beam switching/steering butler matrix for phased array system," *IEEE Trans. Antennas Propag.*, vol. 58, no. 2, pp. 367–374, 2010.
- [5] X. Yu, J. Zhang, and K. B. Letaief, "A hardware-efficient analog network structure for hybrid precoding in millimeter wave systems," *IEEE J. Sel. Topics Signal Process.*, vol. 12, no. 2, pp. 282–297, 2018.
- [6] A. El Zooghby, *Smart Antenna Engineering*. Norwood, MA: Artech House, Inc., 2005.
- [7] Y. Wang, K. Ma, and Z. Jian, "A low-loss butler matrix using patch element and honeycomb concept on SISL platform," *IEEE Trans. Microw. Theory Tech.*, vol. 66, no. 8, pp. 3622–3631, 2018.
- [8] Y. Su, Y. Liu, Y. Zhou, J. Yuan, H. Cao, and J. Shi, "Broadband LEO satellite communications: Architectures and key technologies," *IEEE Wireless Commun.*, vol. 26, no. 2, pp. 55–61, 2019.
- [9] C. Jiang and X. Zhu, "Reinforcement learning based capacity management in multi-layer satellite networks," *IEEE Trans. Wireless Commun.*, vol. 19, no. 7, pp. 4685–4699, 2020.
- [10] A. Kak and I. F. Akyildiz, "Large-scale constellation design for the Internet of Space Things/CubeSats," in *Proc. IEEE Globecom Workshops (GC Wkshps)*, 2019.
- [11] 3GPP, "Solutions for NR to support non-terrestrial networks (NTN)," *TR 38.821 V16.0.0*, Dec. 2019.