



Aalborg Universitet

AALBORG UNIVERSITY  
DENMARK

## On the Uncertainty of Identification of Civil Engineering Structures using ARMA Models

Andersen, P.; Brincker, Rune; Kirkegaard, Poul Henning

*Publication date:*  
1994

*Document Version*  
Publisher's PDF, also known as Version of record

[Link to publication from Aalborg University](#)

*Citation for published version (APA):*  
Andersen, P., Brincker, R., & Kirkegaard, P. H. (1994). *On the Uncertainty of Identification of Civil Engineering Structures using ARMA Models*. Dept. of Building Technology and Structural Engineering, Aalborg University. Fracture and Dynamics Vol. R9437 No. 58

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

### Take down policy

If you believe that this document breaches copyright please contact us at [vbn@aub.aau.dk](mailto:vbn@aub.aau.dk) providing details, and we will remove access to the work immediately and investigate your claim.

Spiral  
ex 4

---

**INSTITUTTET FOR BYGNINGSTEKNIK**  
DEPT. OF BUILDING TECHNOLOGY AND STRUCTURAL ENGINEERING  
AALBORG UNIVERSITET • AUC • AALBORG • DANMARK

---

**FRACTURE & DYNAMICS**  
**PAPER NO. 58**

**Aalborg Universitetsbibliotek**

530004240749



To be presented at the 13th International Modal Analysis Conference,  
Nashville, Tennessee, February 13-16, 1995

---

**P. ANDERSEN, R. BRINCKER & P. H. KIRKEGAARD**  
**ON THE UNCERTAINTY OF IDENTIFICATION OF CIVIL ENGINEERING**  
**STRUCTURES USING ARMA MODELS**  
**NOVEMBER 1994**

**ISSN 0902-7513 R9437**

---

The FRACTURE AND DYNAMICS papers are issued for early dissemination of research results from the Structural Fracture and Dynamics Group at the Department of Building Technology and Structural Engineering, University of Aalborg. These papers are generally submitted to scientific meetings, conferences or journals and should therefore not be widely distributed. Whenever possible reference should be given to the final publications (proceedings, journals, etc.) and not to the Fracture and Dynamics papers.

---

**INSTITUTTET FOR BYGNINGSTEKNIK**  
DEPT. OF BUILDING TECHNOLOGY AND STRUCTURAL ENGINEERING  
AALBORG UNIVERSITET • AUC • AALBORG • DANMARK

---

**FRACTURE & DYNAMICS**  
**PAPER NO. 58**

To be presented at the 13th International Modal Analysis Conference,  
Nashville, Tennessee, February 13-16, 1995

---

**P. ANDERSEN, R. BRINCKER & P. H. KIRKEGAARD**  
**ON THE UNCERTAINTY OF IDENTIFICATION OF CIVIL ENGINEERING**  
**STRUCTURES USING ARMA MODELS**  
**NOVEMBER 1994**

ISSN 0902-7513 R9437

---

# ON THE UNCERTAINTY OF IDENTIFICATION OF CIVIL ENGINEERING STRUCTURES USING ARMA MODELS

P. Andersen, R. Brincker & P.H. Kirkegaard  
Department of Building Technology and Structural Engineering  
Aalborg University  
Sohngaardsholmsvej 57, 9000 Aalborg, Denmark

## ABSTRACT

In this paper the uncertainties of modal parameters estimated using ARMA models for identification of civil engineering structures are investigated. How to initialize the predictor part of a Gauss-Newton optimization algorithm is put in focus. A backward-forecasting procedure for initialization of the predictor is proposed. This procedure is compared with a standard prediction error method optimization algorithm in a simulation study. It is found that the uncertainties can be reduced by a proper selection of the initial conditions for the predictor.

## NOMENCLATURE

$\{\theta\}$	Vector containing ARMA parameters
$\{\phi\}$	Regression vector
$\{\psi\}$	Gradient filter vector
$\{W\}$	Available measurements vector
$\{\dot{V}\}$	Gradient of loss function
$[H]$	Hessian matrix
$y(t)$	Measured output
$\hat{y}(t)$	Predicted output
$e(t)$	Zero-mean Gaussian white noise
$w(t)$	Auxilliary sequence
$\varepsilon(t)$	Prediction error
$\mu$	Mean value, bisection factor.
$\beta$	RMS measure
$\zeta_j$	Damping ratio of the $j$ th mode
$f_j$	Natural eigen-frequency of the $j$ th mode
$T$	Sampling period
$V$	Loss function
$q$	Forward shift operator
$q^{-1}$	Backward shift operator
$A(q^{-1})$	Auto Regressive polynomial
$C(q^{-1})$	Moving Average polynomial

$a_j$	$j$ th Auto Regressive parameter
$c_j$	$j$ th Moving Average parameter
$n_a$	Number of Auto Regressive parameters
$n_c$	Number of Moving Average parameters
$t_s$	Starting time
$N$	Number of samples
$SNR$	Signal-to-noise ratio
$CV$	Coefficient of variation
$E[\ ]$	Expected value
$i$	$\sqrt{-1}$

## 1. INTRODUCTION

For several years much research on identification of linear civil engineering structures using an Auto Regressive Moving Average (ARMA) model has been performed, see e.g. Pandit et al. [1]. Several authors have shown that the ARMA model is able to give resonable modal parameter estimates and prediction of the response. However, it is often neglected that identification using ARMA models is a statistical method which allows not only the extraction of the modal parameters from a given measured output; but also estimation of their statistical errors as a measure of the uncertainty, see e.g. Jensen et al. [2]. The quantification of the uncertainties of the modal parameters is especially important if they are used in the field of e.g. vibrational-based inspection. In this case it is important to have an estimate of the uncertainties of the modal parameters, because only significant changes of the modal parameters are of interest, see e.g. Rytter [3], Brincker et al. [4] and Brincker et al. [5]. It is well known that the uncertainties of the modal parameter estimates are dependent upon how the data have been sampled, i.e. the selection of sampling period  $T$ , see e.g. D'Emilia et al. [6] and Yao et al. [7]. Much research on the selection of an optimal sampling period that minimizes the uncertainties of the

modal parameters has been performed, see e.g. Kirkegaard [8], Ljung [9], Lee et al. [10] and Yao et al. [7]. The general assumption in these cases is that the estimator has asymptotically unbiased and efficient statistical properties, i.e. the estimator attains the Cramer-Rao lower bound of variance. This assumption is only valid if the amount of data is infinite.

This paper concerns the problem that occurs when modal parameters are estimated using an ARMA model with only a limited amount of data. Especially the initialization of the predictor part of the identification procedure will be covered, because this can have significant effect on the estimator properties.

It will be shown how a proper initialization procedure can reduce the uncertainties. Two different implementations of a nonlinear least-square PEM (Prediction Error Method) algorithm will be compared by a simulation study. The algorithm used as reference is the MATLAB [11] routine ARMAX.M which is based on the Gauss-Newton optimization algorithm, see Ljung [12]. This routine can also work without external input, i.e. be used for ARMA models. The performance of this algorithm will be compared with one based on a backward-forecasting method which originally was developed for ARMAX models, where the external input is unknown backwards in time, see Knudsen [13]. This algorithm has proved to work very well on ARMA models as well. In the following the MATLAB routine will be referred to as MAT and the backward-forecasting routine as BAC.

Sections 2 and 3 deal with the foundation of the ARMA model and the PEM method while section 4 concerns the backward-forecasting method. In section 5 an example based on a simulation study is given.

## 2. ARMA MODEL

If an ARMA(2n,2n-1) model is used for a stationary Gaussian white noise excited linear n-degree of freedom system it can be shown that the covariance of the response due to the ARMA model and that of the white noise excited structure will be identical, see e.g. Kozin et al. [14]. Given a measured response  $y(t)$  the ARMA( $n_a, n_c$ ) model is defined as

$$\begin{aligned} y(t) + a_1 y(t-1) + \dots + a_{n_a} y(t-n_a) = \\ e(t) + c_1 e(t-1) + \dots + c_{n_c} e(t-n_c) \end{aligned} \quad (1)$$

where  $y(t)$  is obtained by filtering the Gaussian white noise  $e(t)$  through the filter described by the Auto Regressive polynomial, consisting of  $n_a$  parameters  $a_p$ ,

and the Moving Average polynomial, consisting of  $n_c$  parameters  $c_p$ . By introducing the following polynomials in the backward shift operator  $q^{-1}$ , defined as  $q^{-j} y(t) = y(t-j)$

$$A(q^{-1}) = 1 + a_1 q^{-1} + \dots + a_{n_a} q^{-n_a} \quad (2)$$

$$C(q^{-1}) = 1 + c_1 q^{-1} + \dots + c_{n_c} q^{-n_c}$$

eq.(1) can be written in a more compact form as

$$y(t) = \frac{C(q^{-1})}{A(q^{-1})} e(t) \quad (3)$$

The roots of  $A(q^{-1})$  are the poles of the model whereas the roots of  $C(q^{-1})$  are the zeroes. Assuming that the model is stable the poles are in complex conjugated pairs. The relationship between the poles  $p_j$  and the modal parameters is given by

$$p_j = e^{2\pi f_j T (-\zeta_j + i\sqrt{1-\zeta_j^2})} \quad j = 1 \dots n_a \quad (4)$$

where  $f_j$  and  $\zeta_j$  are the natural eigen-frequency and damping ratio of the  $j$ th mode.  $T$  is the sampling period. It is seen that each complex conjugated pair of poles corresponds to a simple-damped oscillator, see Safak [15].

Setting  $\lambda_j = \ln(p_j)$  the modal parameters are obtained from the following equations

$$f_j = \frac{|\lambda_j|}{2\pi T}, \quad \zeta_j = \frac{-\text{Re}(\lambda_j)}{|\lambda_j|} \quad (5)$$

where  $||$  denotes the modulus and  $\text{Re}$  the real part of the complex number  $\lambda_j$ .

## 3. OPTIMIZATION PROCEDURE

The parameters of the ARMA model are estimated by minimizing a quadratic error function  $V$  also denoted the loss function. Introducing the vector  $\{\theta\}$  consisting of the ARMA parameters

$$\{\theta\} = \{a_1, \dots, a_{n_a}, c_1, \dots, c_{n_c}\}^T \quad (6)$$

$V(\theta)$  is defined as

$$V(\theta) = \frac{1}{2} \frac{1}{N-t_s+1} \sum_{t=t_s}^N \varepsilon(t, \theta)^2 \quad (7)$$

$$= \frac{1}{2} \frac{1}{N-t_s+1} \sum_{t=t_s}^N (y(t) - \hat{y}(t, \theta))^2$$

where  $\varepsilon(t, \theta)$  is the prediction error,  $\hat{y}(t, \theta)$  is the predicted response and  $t_s = \max(n_a, n_c) + 1$ . The optimal one-step predictor is given by Ljung [9]

$$\hat{y}(t, \theta) = \{\varphi\}^T \{\theta\} \quad (8)$$

where  $\{\varphi\}$  is defined as

$$\{\varphi\} = \{-y(t-1), \dots, -y(t-n_a), \varepsilon(t-1), \dots, \varepsilon(t-n_c)\}^T \quad (9)$$

Eq. (8) can be obtained from eq. (3) and (6) by adding the noise term. To calculate the right-hand side of eq. (8) measurements of  $y(t)$  from time  $t-1$  and back to the infinite past are necessary. In this case, i.e. the stationary case,  $\varepsilon(t, \theta)$  equals the Gaussian white noise  $e(t)$  and the predictor is really optimal in the least square sense. To calculate a parameter estimate a numerical minimization method must be chosen. The method which will be used is based on the Gauss-Newton algorithm, defined as

$$\{\theta\}_{k+1} = \{\theta\}_k - \mu [H(\theta_k)]^{-1} \{\dot{V}(\theta_k)\} \quad (10)$$

where  $\mu$  is a bisection factor and  $k$  is the iteration number. The Hessian matrix  $[H(\theta_k)]$  and gradient of the loss function  $\{\dot{V}(\theta_k)\}$  are defined as

$$\{\dot{V}(\theta_k)\} = - \frac{1}{N-t_s+1} \sum_{t=t_s}^N \{\psi(t, \theta_k)\} \varepsilon(t, \theta_k) \quad (11)$$

$$[H(\theta_k)] = - \frac{1}{N-t_s+1} \sum_{t=t_s}^N \{\psi(t, \theta_k)\} \{\psi(t, \theta_k)\}^T$$

and the regression filter  $\{\psi(t, \theta_k)\}$  as

$$\{\psi(t, \theta_k)\} = \frac{1}{C(q^{-1}, \theta_k)} \{\varphi(t, \theta_k)\} \quad (12)$$

The main difference between the two routines is the procedure for initialization of  $\varepsilon(t, \theta)$  for  $t=t_s-1$  to  $t_s-n_c$  in eq. (9). The MAT routine uses a direct start procedure and sets these missing values to zero, i.e. the direct start can be interpreted as the unconditional expectation for these missing values. The BAC routine, on the other hand, uses a conditional expectation for these missing noise values, see Knudsen [13]. This problem concerning initialization of the predictor has been recognised for many years, see Ljung [18]. Especially, a system with a high order  $C(q)$  polynomial having weakly damped zeroes close to 1 will give a transient, see e.g. Box et al. [16], Saric et al. [17] and Knudsen [13]. This behaviour will introduce bias and increase the uncertainties of the modal parameters.

To ensure global convergence a good initial estimate of  $\{\varphi\}$  must be provided. Both algorithms use the same procedure for establishing the initial estimate. First a high-order AR model is applied to the response  $y(t)$ . The prediction error  $\varepsilon(t)$  of this model is used as external input in an ARX model. The estimated parameters of this model will then be the initial estimate, see Ljung [9] and Ljung [12]. In Ljung [9] it is shown that this will lead to global convergence for the ARMA model optimization procedure.

#### 4. BACKWARD-FORECASTING

In the BAC routine the calculation of the missing initial noise values of the predictor is based on the following conditional expectation

$$E[\{e(t_s-1), \dots, e(t_s-n_c)\} | \{W\}] = \{e_c(t_s-1), \dots, e_c(t_s-n_c)\} \quad (13)$$

given available measurements  $\{W\}$ . Using this conditional expectation, the transient will disappear, see Knudsen [13]. The index  $c$  is used to distinguish this conditional expectation from the one step predictor. To calculate the conditional expectation given by eq. (13) an auxiliary sequence  $w(t)$  is introduced

$$w(t) = A(q^{-1})y(t) \quad (14)$$

This sequence can be calculated for  $t=t_s$  to  $N$ . Combining eq. (3) with eq. (14) it follows that  $w(t)$  is an  $MA(n_c)$  process with the forward model defined as

$$w(t) = C(q^{-1})e(t) \quad (15)$$

and the backward model defined as

$$w(t) = C(q)e^b(t) \quad (16)$$

where the superscript  $b$  stands for backwards. Notice that  $e(t)$  and  $e^b(t)$  are two different white noise sequences. Also notice that  $C(q)$  is now a polynomial in the forward shift operator  $q$ , defined as  $q^j y(t) = y(t+j)$ .

The development of the backward-forecasting method is based on eq. (15) and (16), and therefore it is sufficient to define the available measurements as the known part of  $w(t)$ , i.e.

$$\{W\} = \{w(t_s), \dots, w(N)\} \quad (17)$$

Taking conditional expectation on both sides of eq. (16) yields

$$w_c(t) = C(q)e_c^b(t) \quad (18)$$

It follows from eq. (17) that  $w_c(t) = w(t)$ , for  $t = t_s$  to  $N$ . Thus  $e_c^b(t)$  can be calculated backwards for  $t=N$  to  $t_s$  by

$$e_c^b(t) = \frac{1}{C(q)} w_c(t) \quad (19)$$

Starting this filter from  $t=N$  requires the initial conditions  $\{e_c^b(N+t), \dots, e_c^b(N+n_c)\}$ . These are set to zero and the resulting transient is assumed to have faded out before  $t_s$  is reached. Because  $e_c^b(t)$  is a zero-mean Gaussian white noise the conditional expected value  $E[e_c^b(t)|\{W\}]$  is equal to zero, i.e.  $e_c^b(t) = 0$  for  $t < t_s$ . Using this and eq. (18) it is now possible to predict  $w_c^b(t)$  for  $t < t_s$ .

Taking the conditional expectation on both sides of eq. (15) and separating  $e_c(t)$  yields

$$e_c(t) = \frac{1}{C(q^{-1})} w_c(t) \quad (20)$$

Because  $w_c(t) = 0$  for  $t < t_s - n_c$  it follows from eq. (20) that  $e_c(t) = 0$  for  $t < t_s - n_c$ . Inserting  $w_c(t)$  for  $t = t_s - n_c$  to  $t_s - 1$  eq. (20) the initial conditions  $\{e_c(t_s - 1), \dots, e_c(t_s - n_c)\}$  can be calculated. Using these initial conditions it is straightforward to calculate the loss function  $V$  in eq. (7) for a specified value of  $\{\theta\}$ .

In Knudsen [13] it is shown that the initial values of the regression filter in eq. (12), for  $t = t_s - n_c$  to  $t_s - 1$  can be

obtained as

$$\{\psi(t)\} = - \frac{de_c(t)}{d\{\theta\}} \quad (21)$$

These initial values can be calculated by differentiating eq. (14) - (16) and eq. (18) - (20) with respect to  $\{\theta\}$ , see Knudsen [13].

## 5. EXAMPLE

The significance of different initialization procedures is highly dependent upon the chosen model order. A first order ARMA model will not show any particular differences, see Knudsen [13]. In this section an ARMA(10,9) model will be used. This model is the covariance equivalent to a linear 5-degree of freedom uncoupled system excited by a Gaussian white noise. The natural eigenfrequencies  $f_j$  and the corresponding damping ratios  $\zeta_j$  are seen in table 1. In table 2 the parameters of the corresponding ARMA model are listed. In fig. 1 the poles and zeroes of the ARMA model are plotted. The zeroes are seen to be close to the complex unit circle indicating that a large transient can be expected. The system has been simulated using a sampling frequency equal to 75 Hz.

The example consists of four runs. In table 2 the number of simulations  $N_{sim}$  and the amount of data  $N$  of each run are shown. In the table the signal-to-noise ratio SNR of each run is also shown. The SNR is defined as the ratio between the standard deviation of the simulated response and the added Gaussian white noise.

For comparison, two RMS measures  $\{\beta_i\}$  and  $\{\beta_\zeta\}$ , defined as

$$\begin{aligned} \{\beta_f\} &= \sqrt{\frac{1}{N} \sum_{i=1}^N (\{\hat{f}_i\} - \{f\})^2} \\ \{\beta_\zeta\} &= \sqrt{\frac{1}{N} \sum_{i=1}^N (\{\hat{\zeta}_i\} - \{\zeta\})^2} \end{aligned} \quad (22)$$

are introduced.  $\{\beta_f\}$  and  $\{\beta_\zeta\}$  are the RMS-values of the differences between estimated and model values of the natural eigen-frequencies and damping ratios respectively.

The standard deviation of the prediction error for runs 1 and 4 is shown in figs. 1 and 2 at each time step as examples. It should be noted how the standard devia-

tions in the transient parts are reduced using the BAC routine. In tables 4 to 7 the mean value, the coefficient of variation and the *RMS* of the estimated modal parameters are listed. It is seen that in every run the results obtained from using the BAC routine regarding the natural eigen-frequencies are superior to the results obtained from the MAT routine. The results regarding the damping ratios are on the other hand not so good for either of the routines.

## 6. CONCLUSION

In this paper it is shown that the uncertainties and the bias of the modal parameters, applying an ARMA model to a small amount of data, can be reduced by a proper initialization of the predictor part of the optimization algorithm. One way of making this reduction is using a backward-forecasting procedure to predict the un-known initial values. The results have been verified by a simulation study comparing an ordinary optimization algorithm with one using the backward-forecasting approach.

## ACKNOWLEDGEMENT

The Danish Technical Research Council is gratefully acknowledged.

## 7. REFERENCES

- [1] Pandit, S.M & S.M. Wu: *Time Series and System Analysis with Applications*. John Wiley and sons, 1983.
- [2] Jensen, J.L., R. Brincker & A. Rytter: *Uncertainty of Modal Parameters Estimated by ARMA models*. 9th International Conf. on Experimental Mechanics, Copenhagen, 1990.
- [3] Rytter, A.: *Vibrational Based Inspection of Civil Engineering Structures*. Ph.D. Thesis, ISSN: 0902-7513 R9314, Aalborg University, 1993.
- [4] Brincker, R., P.H. Kirkegaard, P. Andersen & M.E. Martinez: *Damage Detection in a Off-shore Structure*. 13th International Modal Analysis Conference, Nashville, 1995.
- [5] Brincker, R., P. Andersen, P.H. Kirkegaard & J.P. Ulfkjær: *Damage Detection in Laboratory Concrete Beams*. 13th International Modal Analysis Conference, Nashville, 1995.
- [6] D'Emilia, G., N. Paone & C. Santolini: *On the Uncertainties in the Estimation of Modal Parameters of a Structure*. 9th International Modal Analysis Conference, Florence, 1991.
- [7] Yao, Y.X. & S.M. Pandit: *Variance Analysis of Multichannel Time Domain Modal Estimators*. 11th International Modal Analysis Conference, Florida, 1993.
- [8] Kirkegaard, P.H.: *Optimal Selection of the Sampling Interval For Estimation of Modal Parameters by an ARMA model*. 11th International Modal Analysis Conference, Florida, 1993.
- [9] Ljung, L.: *System Identification - Theory for the User*. Prentice Hall, Englewood Cliffs, 1987.
- [10] Lee, A.C. & J.H. Chen: *Optimal Extraction of Structural Characteristics from Response Measurements*. Journal of Guidance vol. 13, no. 4, 1990.
- [11] PC-MATLAB for MS-DOS Personal Computers, The Math Works, Inc. 1989.
- [12] Ljung, L. System Identification Toolbox. The Math. Works, Inc., 1991.
- [13] Knudsen, T.: *A New Method for Estimating ARMAX Models*. SYSID94, Copenhagen, 1994.
- [14] Kozin, F. & H.G. Natke: *System Identification Techniques*. Structural Safety vol. 3, 1986.
- [15] Safak, E.: *Optimal-Adaptive Filters for Modeling Spectral Shape, Site Amplification, and Source Scaling*. Soil Dynamics and Earthquake Engineering, vol. 8, no. 2, 1989.
- [16] Box, G.P. & G.M. Jenkins: *Time Series Analysis Forecasting and Control*. Holden-Day, San Francisco, CA., 1976.
- [17] Saric, Z.M. & S.R. Turajlic: *Estimation and Setting Starting Values in ARMA Algorithms*. IEEE Transactions on Circuits Systems and Signal Processing. 1993.
- [18] Ljung, L.: *On the Consistency of Prediction Error Identification Methods*. Mathematics in Science and Engineering. vol. 126, 1976.

Mode	$f_i$ [Hz]	$\zeta_i$ [%]
1	2	0.1
2	4	0.5
3	8	0.1
4	16	5
5	32	10

Table 1. The modal parameters of the linear structural system.

	$A(q^{-1})$	$C(q^{-1})$
1	-4.493	-3.239
2	8.581	4.599
3	-8.584	-3.601
4	3.808	1.656
5	1.085	-0.547
6	-2.010	0.326
7	-0.368	-0.039
8	2.311	-0.316
9	-1.832	0.231
10	0.509	

Table 2. The ARMA model that corresponds to the linear system.

Run	SNR %	N	$N_{sim}$
1	5	200	500
2	20	200	500
3	5	1000	250
4	20	1000	250

Table 3. The four simulation runs dependence on SNR, N and  $N_{sim}$ .

	MAT			BAC		
	$\mu$	CV	$\beta$	$\mu$	CV	$\beta$
$f_1$	2.06	0.053	0.122	2.05	0.052	0.120
$f_2$	3.91	0.100	0.400	3.91	0.087	0.352
$f_3$	8.04	0.041	0.328	8.04	0.038	0.306
$f_4$	16.55	0.115	1.974	16.31	0.109	1.800
$f_5$	31.55	0.093	2.956	31.12	0.095	3.080
$\zeta_1$	0.052	0.957	0.071	0.056	1.010	0.079
$\zeta_2$	0.108	1.132	0.160	0.112	1.270	0.180
$\zeta_3$	0.030	2.545	0.083	0.064	2.750	0.185
$\zeta_4$	0.114	1.165	0.148	0.109	1.270	0.151
$\zeta_5$	0.041	1.690	0.091	0.051	1.267	0.081

Table 4. Results of run 1. Mean value  $\mu$ , coefficient of variation CV and RMS measure  $\beta$  of the modal parameters  $f_j$  and  $\zeta_j$ .

	MAT			BAC		
	$\mu$	CV	$\beta$	$\mu$	CV	$\beta$
$f_1$	2.05	0.052	0.120	2.05	0.048	0.110
$f_2$	3.80	0.117	0.483	3.91	0.097	0.387
$f_3$	8.07	0.057	0.464	8.05	0.058	0.467
$f_4$	17.27	0.126	2.492	16.88	0.125	2.295
$f_5$	30.95	0.099	3.228	30.80	0.096	3.178
$\zeta_1$	0.069	1.011	0.097	0.067	1.033	0.096
$\zeta_2$	0.197	1.117	0.215	0.156	1.061	0.223
$\zeta_3$	0.050	2.066	0.113	0.060	2.541	0.162
$\zeta_4$	0.115	1.392	0.171	0.131	1.273	0.186
$\zeta_5$	0.040	1.427	0.083	0.045	1.428	0.084

Table 5. Results of run 2. Mean value  $\mu$ , coefficient of variation CV and RMS measure  $\beta$  of the modal parameters  $f_j$  and  $\zeta_j$ .

	MAT			BAC		
	$\mu$	CV	$\beta$	$\mu$	CV	$\beta$
$f_1$	2.03	0.033	0.075	2.01	0.018	0.037
$f_2$	4.08	0.081	0.338	4.04	0.059	0.241
$f_3$	7.97	0.059	0.470	7.99	0.023	0.185
$f_4$	16.63	0.119	2.064	16.52	0.088	1.690
$f_5$	31.83	0.107	3.579	30.56	0.094	2.975
$\zeta_1$	0.044	1.189	0.068	0.027	1.271	0.042
$\zeta_2$	0.118	1.394	0.199	0.053	1.837	0.108
$\zeta_3$	0.018	5.783	0.105	0.100	2.337	0.253
$\zeta_4$	0.118	1.304	0.168	0.081	1.356	0.113
$\zeta_5$	0.032	1.266	0.079	0.031	1.183	0.077

Table 6. Results of run 3. Mean value  $\mu$ , coefficient of variation CV and RMS measure  $\beta$  of the modal parameters  $f_j$  and  $\zeta_j$ .

	MAT			BAC		
	$\mu$	CV	$\beta$	$\mu$	CV	$\beta$
$f_1$	2.05	0.044	0.104	2.04	0.038	0.084
$f_2$	4.10	0.094	0.382	4.08	0.051	0.222
$f_3$	8.08	0.048	0.203	8.02	0.025	0.394
$f_4$	17.51	0.137	2.405	16.53	0.108	2.300
$f_5$	31.29	0.106	3.524	30.58	0.097	3.095
$\zeta_1$	0.057	1.174	0.088	0.057	1.163	0.087
$\zeta_2$	0.151	1.478	0.258	0.059	1.563	0.105
$\zeta_3$	0.024	4.687	0.112	0.091	2.660	0.258
$\zeta_4$	0.135	1.611	0.232	0.327	1.036	0.435
$\zeta_5$	0.046	1.414	0.084	0.046	1.834	0.100

Table 7. Results of run 4. Mean value  $\mu$ , coefficient of variation CV and RMS measure  $\beta$  of the modal parameters  $f_j$  and  $\zeta_j$ .

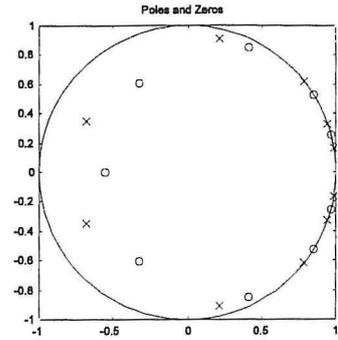


Fig 1. Poles (x) and zeroes (o) of system.

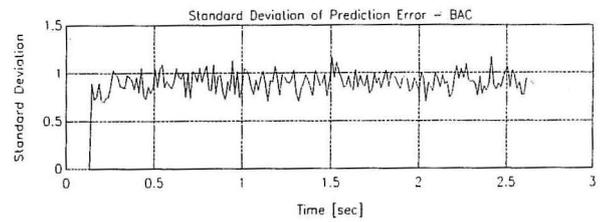
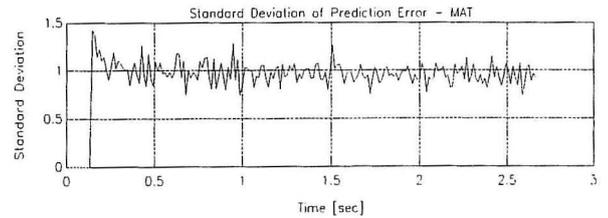


Fig 2. Standard deviation of prediction error using the simulations of Run 1.

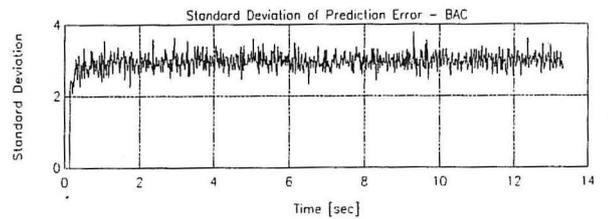
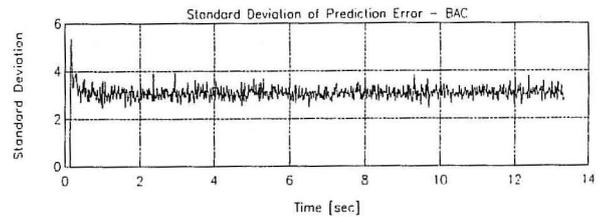


Fig 3. Standard deviation of prediction error using the simulations of Run 4.

## FRACTURE AND DYNAMICS PAPERS

PAPER NO. 28: Rune Brincker, Steen Krenk & Jakob Laigaard Jensen: *Estimation of Correlation Functions by the Random Decrement Technique*. ISSN 0902-7513 R9041.

PAPER NO. 29: Poul Henning Kirkegaard, John D. Sørensen & Rune Brincker: *Optimal Design of Measurement Programs for the Parameter Identification of Dynamic Systems*. ISSN 0902-7513 R9103.

PAPER NO. 30: L. Gansted & N. B. Sørensen: *Introduction to Fatigue and Fracture Mechanics*. ISSN 0902-7513 R9104.

PAPER NO. 31: R. Brincker, A. Rytter & S. Krenk: *Non-Parametric Estimation of Correlation Functions*. ISSN 0902-7513 R9120.

PAPER NO. 32: R. Brincker, P. H. Kirkegaard & A. Rytter: *Identification of System Parameters by the Random Decrement Technique*. ISSN 0902-7513 R9121.

PAPER NO. 33: A. Rytter, R. Brincker & L. Pilegaard Hansen: *Detection of Fatigue Damage in a Steel Member*. ISSN 0902-7513 R9138.

PAPER NO. 34: J. P. Ulfkjær, S. Krenk & R. Brincker: *Analytical Model for Fictitious Crack Propagation in Concrete Beams*. ISSN 0902-7513 R9206.

PAPER NO. 35: J. Lyngbye: *Applications of Digital Image Analysis in Experimental Mechanics*. Ph.D.-Thesis. ISSN 0902-7513 R9227.

PAPER NO. 36: J. P. Ulfkjær & R. Brincker: *Indirect Determination of the  $\sigma - w$  Relation of HSC Through Three-Point Bending*. ISSN 0902-7513 R9229.

PAPER NO. 37: A. Rytter, R. Brincker & P. H. Kirkegaard: *An Experimental Study of the Modal Parameters of a Damaged Cantilever*. ISSN 0902-7513 R9230.

PAPER NO. 38: P. H. Kirkegaard: *Cost Optimal System Identification Experiment Design*. ISSN 0902-7513 R9237.

PAPER NO. 39: P. H. Kirkegaard: *Optimal Selection of the Sampling Interval for Estimation of Modal Parameters by an ARMA-Model*. ISSN 0902-7513 R9238.

PAPER NO. 40: P. H. Kirkegaard & R. Brincker: *On the Optimal Location of Sensors for Parametric Identification of Linear Structural Systems*. ISSN 0902-7513 R9239.

PAPER NO. 41: P. H. Kirkegaard & A. Rytter: *Use of a Neural Network for Damage Detection and Location in a Steel Member*. ISSN 0902-7513 R9245

PAPER NO. 42: L. Gansted: *Analysis and Description of High-Cycle Stochastic Fatigue in Steel*. Ph.D.-Thesis. ISSN 0902-7513 R9135.

PAPER NO. 43: M. Krawczuk: *A New Finite Element for Static and Dynamic Analysis of Cracked Composite Beams*. ISSN 0902-7513 R9305.

## FRACTURE AND DYNAMICS PAPERS

PAPER NO. 44: A. Rytter: *Vibrational Based Inspection of Civil Engineering Structures*. Ph.D.-Thesis. ISSN 0902-7513 R9314.

PAPER NO. 45: P. H. Kirkegaard & A. Rytter: *An Experimental Study of the Modal Parameters of a Damaged Steel Mast*. ISSN 0902-7513 R9320.

PAPER NO. 46: P. H. Kirkegaard & A. Rytter: *An Experimental Study of a Steel Lattice Mast under Natural Excitation*. ISSN 0902-7513 R9326.

PAPER NO. 47: P. H. Kirkegaard & A. Rytter: *Use of Neural Networks for Damage Assessment in a Steel Mast*. ISSN 0902-7513 R9340.

PAPER NO. 48: R. Brincker, M. Demosthenous & G. C. Manos: *Estimation of the Coefficient of Restitution of Rocking Systems by the Random Decrement Technique*. ISSN 0902-7513 R9341.

PAPER NO. 49: L. Gansted: *Fatigue of Steel: Constant-Amplitude Load on CCT-Specimens*. ISSN 0902-7513 R9344.

PAPER NO. 50: P. H. Kirkegaard & A. Rytter: *Vibration Based Damage Assessment of a Cantilever using a Neural Network*. ISSN 0902-7513 R9345.

PAPER NO. 51: J. P. Ulfkjær, O. Hededal, I. B. Kroon & R. Brincker: *Simple Application of Fictitious Crack Model in Reinforced Concrete Beams*. ISSN 0902-7513 R9349.

PAPER NO. 52: J. P. Ulfkjær, O. Hededal, I. B. Kroon & R. Brincker: *Simple Application of Fictitious Crack Model in Reinforced Concrete Beams. Analysis and Experiments*. ISSN 0902-7513 R9350.

PAPER NO. 53: P. H. Kirkegaard & A. Rytter: *Vibration Based Damage Assessment of Civil Engineering Structures using Neural Networks*. ISSN 0902-7513 R9408.

PAPER NO. 54: L. Gansted, R. Brincker & L. Pilegaard Hansen: *The Fracture Mechanical Markov Chain Fatigue Model Compared with Empirical Data*. ISSN 0902-7513 R9431.

PAPER NO. 55: P. H. Kirkegaard, S. R. K. Nielsen & H. I. Hansen: *Identification of Non-Linear Structures using Recurrent Neural Networks*. ISSN 0902-7513 R9432.

PAPER NO. 56: R. Brincker, P. H. Kirkegaard, P. Andersen & M. E. Martinez: *Damage Detection in an Offshore Structure*. ISSN 0902-7513 R9434.

PAPER NO. 57: P. H. Kirkegaard, S. R. K. Nielsen & H. I. Hansen: *Structural Identification by Extended Kalman Filtering and a Recurrent Neural Network*. ISSN 0902-7513 R9435.

PAPER NO. 58: P. Andersen, R. Brincker, P. H. Kirkegaard: *On the Uncertainty of Identification of Civil Engineering Structures using ARMA Models*. ISSN 0902-7513 R9437.

**Department of Building Technology and Structural Engineering  
Aalborg University, Sohngaardsholmsvej 57, DK 9000 Aalborg  
Telephone: +45 98 15 85 22    Telefax: +45 98 14 82 43**