



Aalborg Universitet

**AALBORG UNIVERSITY**  
DENMARK

## Numerical 3-D Modelling of Overflows

Larsen, Torben; Nielsen, L.; Jensen, B.; Christensen, E. D.

*Published in:*  
Conference Proceedings : 11th International Conference on Urban Drainage

*Publication date:*  
2008

*Document Version*  
Publisher's PDF, also known as Version of record

[Link to publication from Aalborg University](#)

*Citation for published version (APA):*  
Larsen, T., Nielsen, L., Jensen, B., & Christensen, E. D. (2008). Numerical 3-D Modelling of Overflows. In *Conference Proceedings : 11th International Conference on Urban Drainage: Edinburgh International Conference Centre, Scotland : 11 ICUD: 31st August - 5th September 2008*

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

### Take down policy

If you believe that this document breaches copyright please contact us at [vbn@aub.aau.dk](mailto:vbn@aub.aau.dk) providing details, and we will remove access to the work immediately and investigate your claim.

## Numerical 3-D Modelling of Overflows

T. Larsen<sup>1\*</sup>, L. Nielsen<sup>2</sup>, B. Jensen<sup>3</sup> and E.D. Christensen<sup>3</sup>

<sup>1</sup> Aalborg University, Civil Engineering, Sohngaardsholmsvej 57, 9000 Aalborg, Denmark

<sup>2</sup> NIRAS A/S, Sortemosevej 2, 3450 Allerød; Denmark

<sup>3</sup> DHI Water & Environment, Agern Alle 5, 2650 Horsholm, Denmark

Corresponding author, e-mail: torben.larsen@civil.aau.dk

### ABSTRACT

The present study uses laboratory experiments to evaluate the reliability of two types of numerical models of sewers systems:

- 1-dimensional model based on the extended Saint-Venant equation including the term for curvature of the water surface (the so-called Boussinesq approximation)
- 2- and 3-dimensional so-called Volume of Fluid Models (VOF-models) based on the full Navier-Stokes equations (named NS3 and developed by DHI Water & Environment)

As a general conclusion, the two numerical models show excellent results when compared with measurements. However, considerable errors occur when inappropriate boundary conditions and grid resolutions are chosen. The paper describes the used physical and numerical models and summarises the results.

### KEYWORDS

Numerical modelling; overflows; critical flow; CFD; volume of fluids

### INTRODUCTION AND BACKGROUND

Overflows are commonly applied in storm sewer systems to control flow and water surface level. Therefore overflows play a central role in the control of discharges of pollutants from sewer systems to the environment.

The basic hydrodynamic principle of an overflow is the so-called critical flow across the edge of the overflow. To ensure critical flow across the edge, the upstream flow must be subcritical whereas the downstream flow is either supercritical or a free jet.

The head/discharge relationship for a broad-crested overflow can easily be determined from basic hydraulic theory based on the continuity and the energy equation, simply by assuming that the Froude number is equal to 1. However, in practice overflows are rarely broad-crested. They are most often rather sharp-edged, which creates a significant curvature of the streamlines, which again causes the pressure distribution to be far from hydrostatic. In this case the classic theory fails and more complex considerations are required.

Experimentally, overflows are well studied. Based on laboratory experiments and Froude number scaling, numerous accurate and reliable formulas for the estimation of the head/discharge relationship for overflows have been derived.

Standard 1-dimensional river or sewer modelling is based on the assumption of hydrostatic pressure distribution. Overflows are usually incorporated in the numerical models using the

mentioned empirical formulas. If standard formulas do not cover the actual geometry for a specific problem, physical experiments have to be carried out.

Numerical modelling of overflows is significantly more complicated than standard 1-dimensional river or sewer modelling. The objective of this study is to determine to which extent the physical models can be replaced by numerical computations. Only main points and examples are given in this paper; a more complete description is found in Nielsen (2007).

## 1-DIMENSIONAL MODELLING OF CRITICAL FLOW

A comprehensive study of this subject has recently been carried out by Zerihun (2004) (see also Zerihun and Fenton, 2006).

Standard sewer and river hydrodynamic models are 1-dimensional models based on the continuity equation and the so-called Saint-Venant equation (SVE); the latter can be understood as a special formulation of the general momentum equation. The SVE yields

$$\frac{\partial Q}{\partial t} + \frac{\partial}{\partial x} \left( \beta \frac{Q^2}{A} \right) = -\frac{1}{\rho} \int_A \frac{\partial p}{\partial x} dA - \frac{\bar{\tau} P}{\rho} = 0 \quad (1)$$

where  $Q$  is the flow,  $\beta$  the velocity distribution coefficient,  $A$  the cross-section area,  $p$  the pressure,  $P$  the wet perimeter,  $\tau$  the bed shear stress,  $t$  the time, and  $x$  is the streamwise coordinate.

In standard models where the pressure distribution is assumed hydrostatic, the pressure term can be expressed in terms of the water depth  $H$ . For steady state flow in a rectangular channel, Equation (1) reduces to

$$\left( gH - \beta \frac{q^2}{H^2} \right) \frac{dH}{dx} + gH(Z' + S_f) = 0 \quad (2)$$

where  $q$  is the flow per unit width,  $H$  the water depth,  $\beta$  the velocity distribution coefficient,  $Z'$  the bottom slope,  $S_f$  the friction slope, and  $x$  is the streamwise coordinate.

As described in detail by Zerihun (2004), the influence of the non-hydrostatic pressure distribution must be included in the SVE if near-critical flow is to be described correctly. The solution is known as the Boussinesq approximation. The effect of the centrifugal forces and the curvature of the streamlines can be implemented in the SVE using various simplified assumptions, but leads to varying accuracy when the equations are discretized and solved numerically. As an example, the so-called BTML version (Boussinesq-type momentum equation with linear variation of the centrifugal term) for steady flow in a rectangular channel (Zerihun, 2004) is:

$$\begin{aligned} & \beta \omega_1 \frac{q^2}{2} \frac{d^3 H}{dx^3} + \beta \omega_1 Z' \frac{q^2}{H} \frac{d^2 H}{dx^2} + (1 + Z'^2) \left( gH - \beta \frac{q^2}{H^2} \right) \frac{dH}{dx} + \\ & \omega_0 \beta q^2 \left( \frac{Z''}{2} + \frac{Z'Z''}{H} \right) + gH(1 + Z'^2)(Z' + S_f) = 0 \end{aligned} \quad (3)$$

where  $Z''$  is the bottom curvature and  $\omega_0$ ,  $\omega_1$  are weight factors for the centrifugal forces.

After discretization, Equation (3) can be solved numerically by iteration as explained in detail by Zerihun, (2004). Examples of such computations are compared with experimental results in Figures 1 and 2.

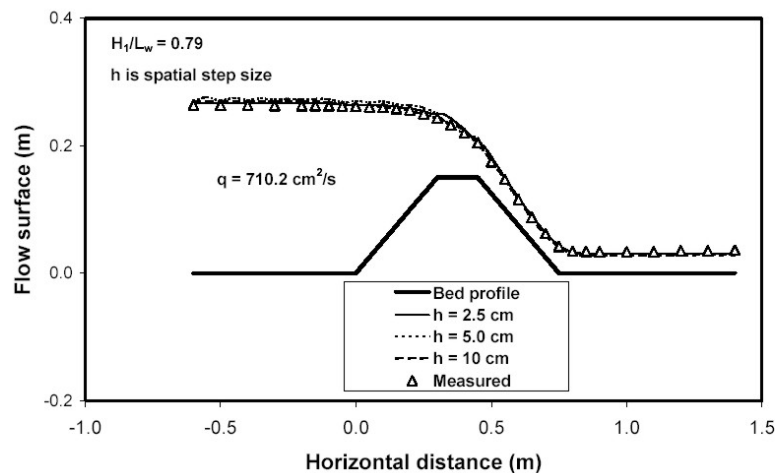


Figure 1 Computed and measured water surface with various spatial resolutions (Zerihun, 2004)

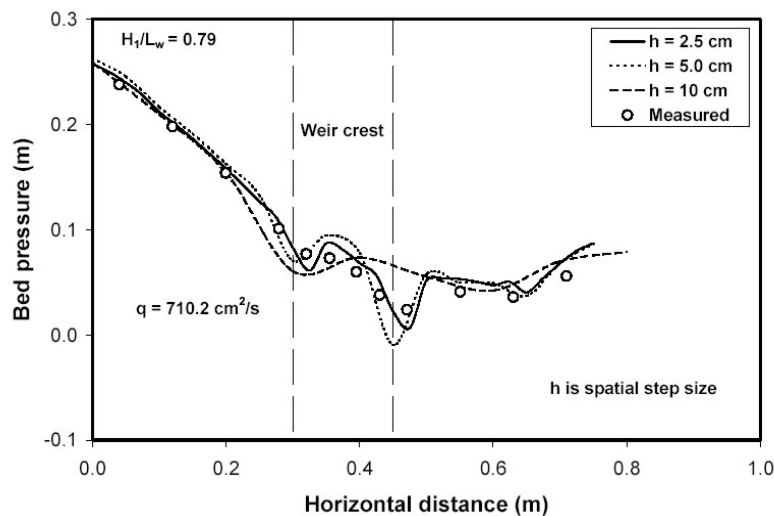


Figure 2 Computed and measured bed pressure with various spatial resolutions (Zerihun, 2004)

The figures indicate clearly that the Boussinesq approximation is well suited for the computation of broad-crested overflows. The results show that the spatial resolution can be rather coarse compared to the water depth without introducing larger errors.

The computational procedure in this method is very fast compared to the 2-D and 3-D models mentioned in the following section. This suggests the possibility of using the principle in sewer and river models for situations where the flow is close to critical flow; this is relevant for several practical applications.

### 3-DIMENSIONAL MODELLING OF CRITICAL FLOW

#### CFD model

The 3-dimensional flow models (often termed CFD-models) are based on the Navier-Stokes equations (NVE), which basically are the three projections of the momentum equations plus the

continuity equation. To model turbulent flow Reynolds' time-averaging is used to separate the mean values and the fluctuating parts of velocities and stresses. The NVE is only solved for the mean value of the flow. This time-averaging introduces the so-called Reynolds' stresses in the NVE.

The Reynolds' stresses are then described by a so-called turbulence model, which is a standard  $k$ - $\varepsilon$ -model in this study, where the shear stresses are determined from the local turbulent kinetic energy  $k$  and the dissipation  $\varepsilon$  of  $k$ . This is a standard procedure included in most CFD-packages.

### Modelling of free surface

CFD-models normally operate with flow within fixed boundaries. The modelling of free surface flow (or 2-phase flow) requires further supplements. A recognized method is the so-called VOF-models (volume of fluid models), which incorporate a moving free boundary. This is done by defining a volume fraction  $F$  (or degree of filling) in each computational cell, which can take the following values:

$$\begin{aligned} F &= 0 && \text{the cell is empty} \\ F &= 1 && \text{the cell is full} \\ 0 < F < 1 &&& \text{the cell contains the free interface} \end{aligned}$$

In order to track the location of the interface, a continuity equation for  $F$  is established in the following form:

$$\frac{\partial F}{\partial t} + u_i \frac{\partial F}{\partial x_i} = 0$$

The initial condition for the free surface is set by assigning the volume fraction  $F$  to be either 1 or 0 in all cells. In principle, the NVE are now solved for one time step in all full cells and a new "field" of  $F$  is found, describing the new location of the surface. Various principles for defining the precise location of the surface exist. Details are given by Hirt and Nichols (1981).

### NS3 model including VOF

In the present study the NS3 (Navier-Stokes 3-dimensional solver) has been applied. This software was developed by DHI Water and Environment, for advanced in-house research in hydrodynamics. The program has several turbulence models available as well as a number of optional VOF formulations. Further details about NS3 can be found in Mayer et al. (1998). The program has been validated against laboratory and full scale measurements in a number of cases, for example reported by Christensen (2006).

The NS3 model always works in transient (non-steady) mode, and the steady state flow situations covered in this study have been computed in this mode by keeping the boundary conditions constant until steady state flow appears.

### Comparison of physical and numerical models

The applicability of the NS3-VOF model was tested by comparing the computed results with the results from two set of experiments: 2-dimensional experiments with broad crested weirs reported by Zerihun (2004) and 3-dimensional experiments of side weirs carried out in the framework of this study.

The primary objectives of the comparison were to study the influence of the spatial resolution and to ensure that back-water could not be transmitted upstream through the critical flow zone. A

secondary objective was to study the capability of the model when the flow passes through the computational grid under an angle of about 45 degree and with a Froude number just below 1 on the inlet side of the weir.

## 2-dimensional models versus experiments

A large number of comparisons between measurements and computations with broad crested, sharp crested, ventilated and non-ventilated overflows were carried out. However, space only allows one example to be presented here, see Figures 3 and 4.

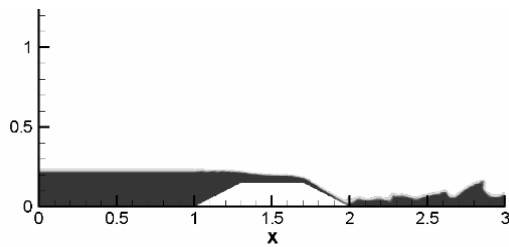


Figure 3 Computation with NS3 of flow over broad-crested overflow

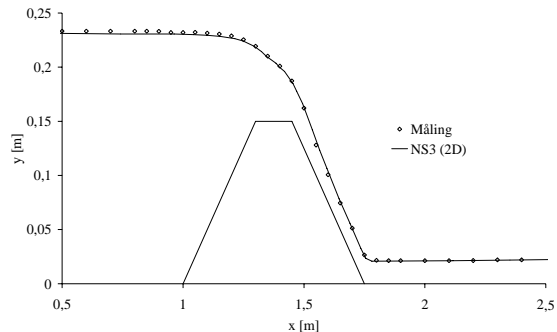


Figure 4 Example of comparison of measurement (måling) and computed (with NS3) water level

The general experience was that the measured and computed water levels deviated less than 5 %, which is close to the accuracy of the measurements. The results also showed that variations in the downstream water level (the downstream boundary condition) did not influence the conditions upstream the point of critical flow.

A 2-d model is fast, and the computational time is short. While the practical relevance is limited, the numerical experiments clearly validate the NS3 model with respect to critical flow. This assessment should without doubt also be valid for other CFD packages which includes the VOF assumption for the free surface.

## 3-dimensional models versus experiments.

In order to assess the numerical model for a 3-D flow situation where the flow direction changes in the area of critical flow, a model of a side weir was set up. Figures 5 and 6 show the physical and the numerical models respectively.

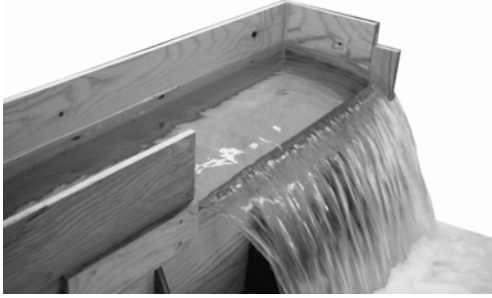


Figure 5 Physical model of side weir

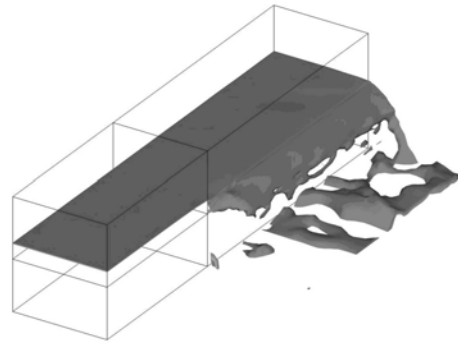


Figure 6 Numerical model of side weir

The comparison between the two models took place in different ways. First, LDA (laser doppler anemometry) close to the sharp crest was attempted with limited success because of strong fluctuations of the surface here. More successful was the comparison of water surface profiles. An example is given in figure 7.

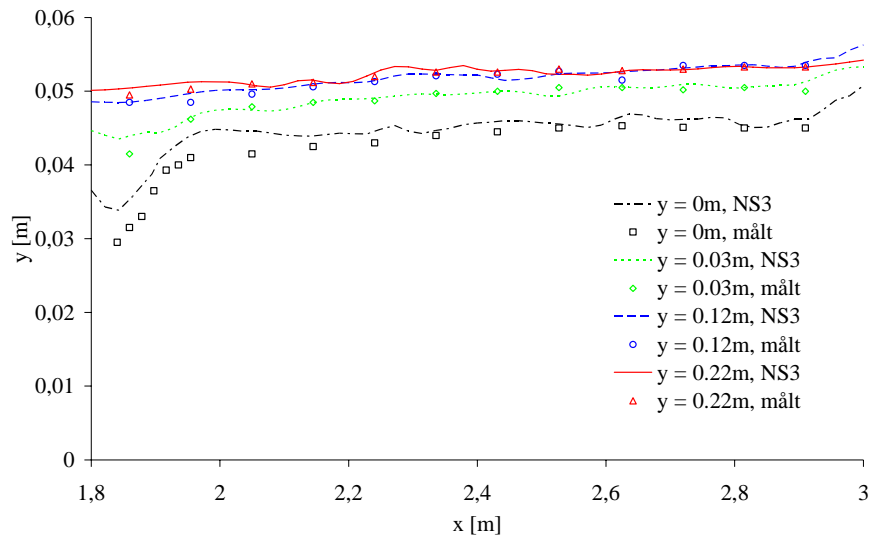


Figure 7 Comparisons of length profiles of water surfaces parallel to overflow crest upstream crest in side weir,  $y$  is horizontal distance from crest, NS3 is computed and "mält" is measured.

In general, the comparisons showed excellent agreement. However, in this case (Figure 6) the 3-D modelling was rather time consuming because high spatial and temporal resolutions were needed. The experience was that significantly lower computational Courant numbers had to be applied compared to the 2-D model. The procedure of finding the optimal resolution proved very time consuming because the execution of each run took several days on a fast PC.

The various turbulence models were tested. In these tests, computations without any internal friction (no turbulence model) were included and, as expected, no significant variation was observed.

## CONCLUSION

1-, 2- and 3-dimensional hydrodynamic models have been evaluated with respect to their capability for simulating overflows. The 2- and 3-D models are based on direct geometric similarity, whereas the 1-D models are rather simplified representations of reality.

The results have shown that the 1-D models developed by Zerihun (2004) in many cases lead to accurate and reliable results. It seems obvious that these 1-D models could have a future in connection with the 1-D commercial sewer and river models on the market because of their capability of computing critical flows.

For the 2-D and 3-D simulations the NS3 program developed by DHI Water & Environment was applied. NS3 is based on the solution of the full Navier-Stokes equations plus a VOF method for the free surface description. Also here accurate and reliable results were obtained if the necessary spatial and temporal resolutions were chosen. It was found that the type of turbulence model is unimportant to simulate this type of flow.

It can be concluded that numerical modelling in many cases can replace physical model tests when it comes to the design of overflows with complex geometries. On the other hand, it should be kept in mind that the setting up, testing and execution of a numerical model, including finding the optimal spatial and temporal resolutions, can take just as long as conducting the physical experiments.

## REFERENCES

- Christensen, E.D. (2006). Large Eddy simulation of Spilling and Plunging Breakers. *Coastal Engineering* 53, 463-485
- Hirt, C.W., Nicholls, B.D. (1981). Volume of fluid (VOF) method for the dynamics of free boundaries. *J. Comput. Phys.*, 39, 201-221
- Mayer, S., Garapon, A., Sørensen, L. (1998). A Fractional Step Method for Unsteady Free-Surface Flow with Application to Non-linear Wave Dynamics. *Int. J. Numer. Meth. Fluids* 28, 293-315.
- Nielsen, L. (2007). Physical and numerical modelling of overflows (in Danish). MSc thesis, Dept. Civil Eng., Aalborg University.
- Zerihun, Y.T. (2004). A One-dimensional Boussinesq-type Momentum Model for Steady Rapidly Varied Open Channel Flows. PhD thesis, The University of Melbourne.
- Zerihun, Y.T., Fenton, J.D. (2006). One-dimensional simulation model for steady transcritical free surface flow at short length transitions. *Advances in Water Resources* 29, 1598-1607.