

Aalborg Universitet

Soil-biofilters for elimination of xenobiotics from wastewaters

Bester,	Kai; Schäfer,	Daniel; Ja	ınzen, Niklas	s; Niederstrassei	r, Bernd; Xolelwa,	Lamani;	Chen
Xijuan							

Publication date: 2009

Document Version Publisher's PDF, also known as Version of record

Link to publication from Aalborg University

Citation for published version (APA):

Bester, K., Schäfer, D., Janzen, N., Niederstrasser, B., Xolelwa, L., & Chen, X. (2009). *Soil-biofilters for elimination of xenobiotics from wastewaters*. Poster presented at SETAC 2009, Göteborg, Sweden.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
 You may freely distribute the URL identifying the publication in the public portal -

If you believe that this document breaches copyright please contact us at vbn@aub.aau.dk providing details, and we will remove access to the work immediately and investigate your claim.

Soil-biofilters for elimination of xenobiotics from wastewaters

Kai Bester^{1,2}, Daniel Schäfer ², Niklas Janzen², Bernd Niederstrasser², Xolelwa Lamani², Xijuan Chen¹

¹Department of Biotechnology, Chemistry and Environmental Engineering, Aalborg University, Aalborg, Denmark
²University Duisburg-Essen, Essen, Germany

kb@bio.aau.dk, +45 99409939



INTRODUCTION

Soil filters are currently discussed for usage in two applications

1) Stormwater management
Stormwater (runoff water) is
sometimes contaminated by PAH
from traffic, biocides from facade
runoff, plasticisers from building
materials, UV filters from building
materials etc. These waters should
be treated before discharge or
infiltration



2) Polishing treated waste water for persistent organic compounds

Current waste water treatment is not able to remove all persistent organic compounds (xenobiotics). Thus further treatment is needed. For small waste water treatment plants, highly efficient technologies with little maintenance is preferred against technological solutions that need support, like ozonisation or nanofiltration

METHODS

Lysimeter


To study the efficiency and the mechanisms that are important in improved soil filters a lysimeter was used.

Waste water polishing

Conditions with low hydraulic load (61 L/m²/d) was used to mimic waste water treatment

Compounds


(UV Blockers,					
antioxidants, lubricants)					
N-butylbenzene sulfonamide					
Benzophenone-3					
2,6-di-tert-butyl-1,4-					
benzoquinone					
Dibenzyl					
1,1-Biphenyl-3,3-dimethyl					
4-methylbenzylidene camphor					
Butylated hydroxytoluene					

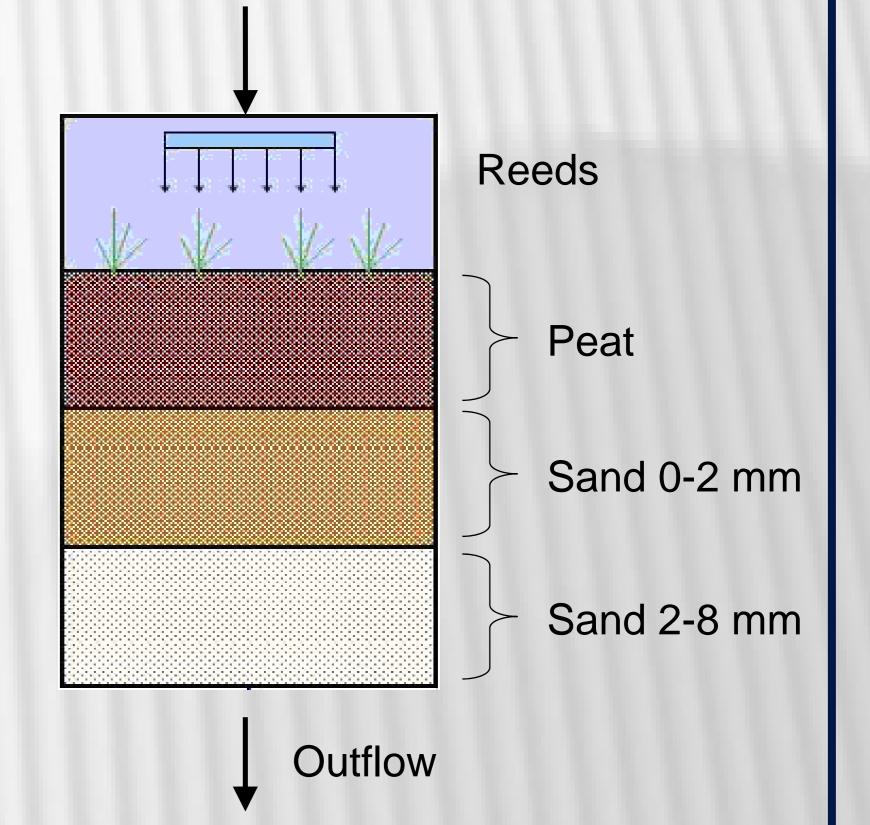


Acronyms	log Kow
NBBS	2.57
BP-3	3.53
2,6-DTB-1,4-BQ	3.90
DB	4.70
1-BP-3-DM	4.90
4-MBC	4.95
BHT	5.03

RESULTS AND DISCUSSIONS

From the balancing experiment it can be seen, that for BHT, NBBS, 1-BP-3-DM, 4-MBC Degradation predominates against sorption, while sorption is more dominant for BP-3, and 2,6-DTB-1,4-BQ

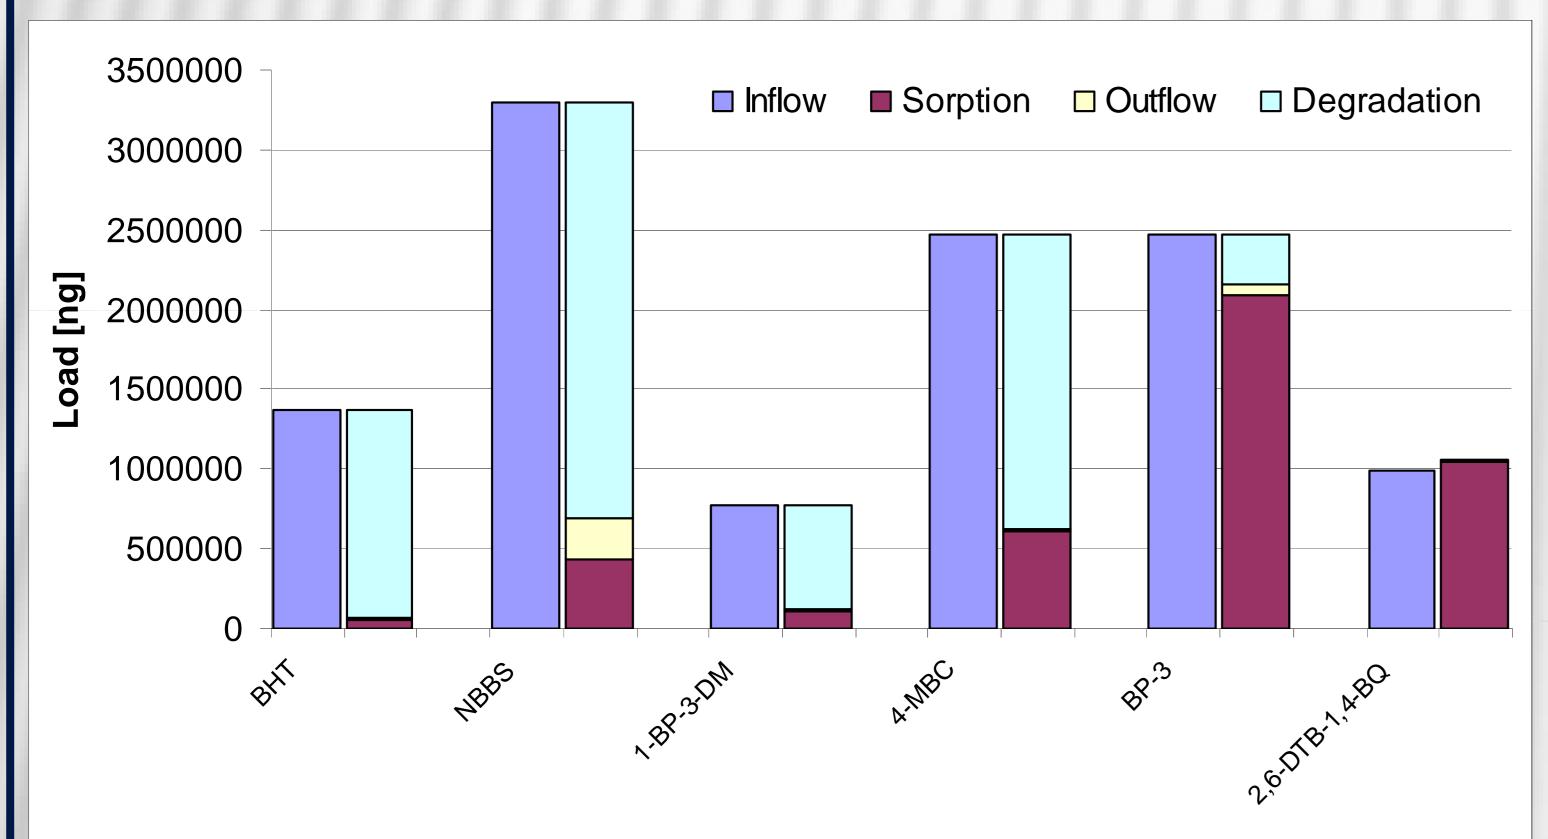

To assess, which layer is most important to eliminate the respective compounds, the soil biofilter was sampled separately for each layer. The peat layer is responsible for 50%-80% of the elimination, but the fine sand layer (0-2 mm) also contributed.

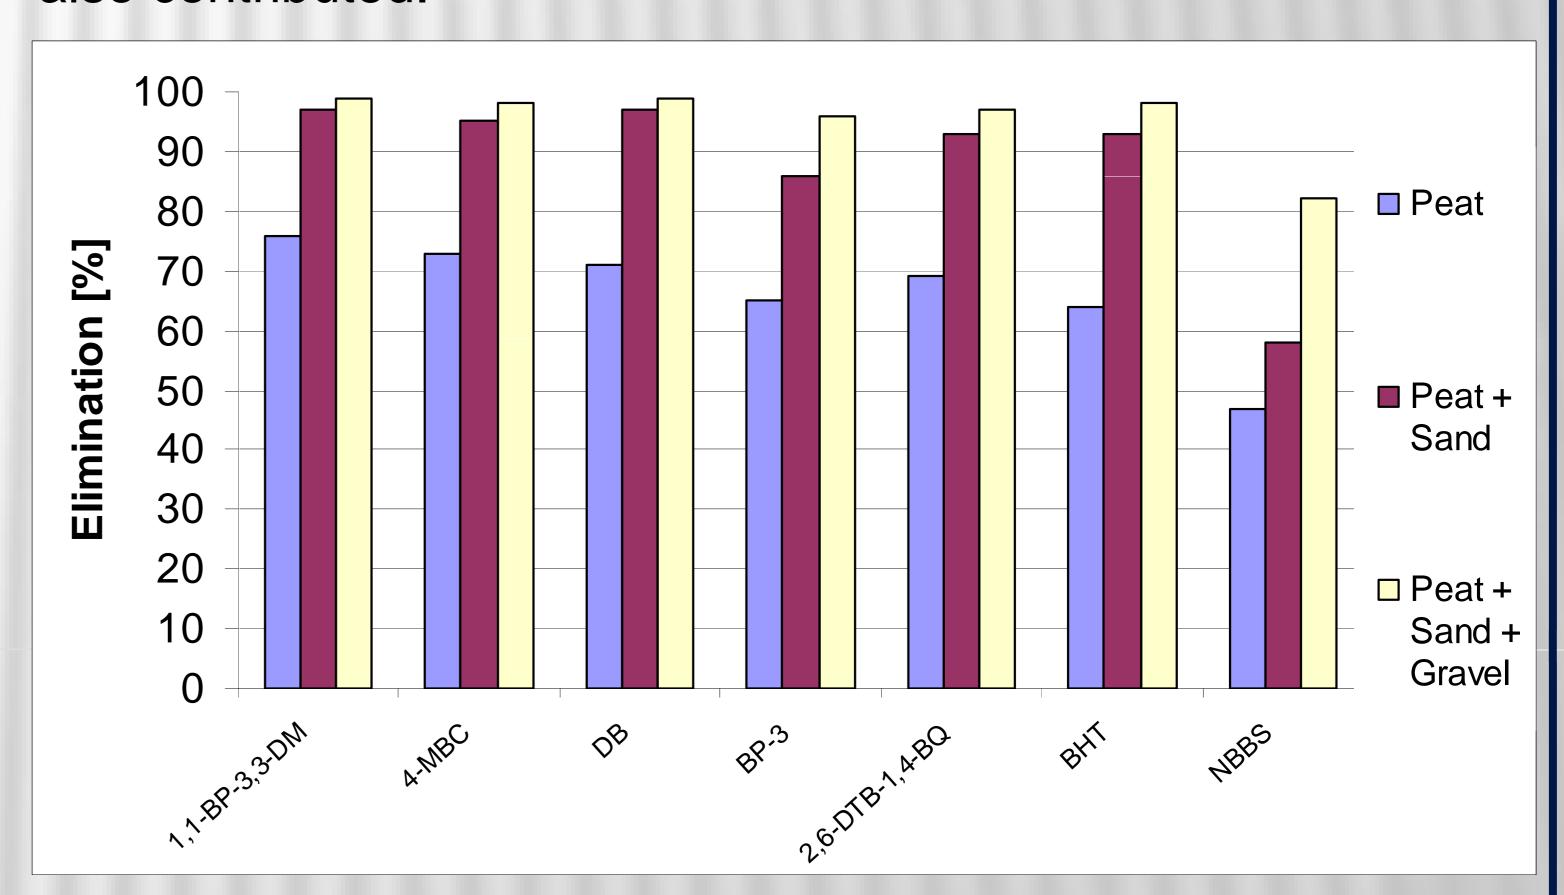

CONCLUSIONS

Soil filters for the elimination of organic micro-pollutants should be constructed with a porous layer rich in organic material such as peat to gain optimal elimination.

The elimination even for very lipohilic compounds is mostly due to degradation, thus the time for usage of the materials is very high.

REFERENCE

Kai Bester and Daniel Schäfer: Activated soil filters (biofilters) for the elimination of xenobiotic compounds (micro-pollutants) from storm- and waste waters, Water Research, 43, 2639-2646, 2009

