



Reliability Evaluation and Probabilistic Design of Coastal Structures

Burcharth, H. F.

Published in:

International Seminar on Hydro-Technical Engineering for Future Development of Ports and Harbors

Publication date:
1993

Document Version
Accepted author manuscript, peer reviewed version

[Link to publication from Aalborg University](#)

Citation for published version (APA):

Burcharth, H. F. (1993). Reliability Evaluation and Probabilistic Design of Coastal Structures. In *International Seminar on Hydro-Technical Engineering for Future Development of Ports and Harbors Un'yushō Kōwan Gijutsu Kenkyūjo*.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

Take down policy

If you believe that this document breaches copyright please contact us at vbn@aub.aau.dk providing details, and we will remove access to the work immediately and investigate your claim.

30/6-93

HFB

International Seminar on Hydro-Technical Engineering for
Future Development of Ports and Harbours
Tokyo, 1993

RELIABILITY EVALUATION AND PROBABILISTIC DESIGN OF COASTAL STRUCTURES

HANS F. BURCHARTH

*Department of Civil Engineering
Aalborg University, Denmark*

Contents

1	Introduction	2
2	Failure modes and failure functions	2
3	Single failure mode probability analysis	4
3.1	Level III methods	4
3.2	Level II methods	6
3.2.1	Linear failure functions of normal-distributed random variables . . .	6
3.2.2	Non-linear failure functions of normal-distributed random variables	8
3.2.3	Non-linear failure functions containing non-normal distributed random variables	15
3.2.4	Time-variant random variables	16
4	Failure probability analysis of failure mode systems	16
5	Uncertainties related to parameters determining the reliability of the structure	19
5.1	Uncertainty related to failure mode formulae	20
5.2	Uncertainty related to environmental parameters	20
5.3	Uncertainty related to structural parameters	21
6	Introduction of a partial coefficient system for implementation of a given reliability in the design	21
6.1	Introduction to partial coefficients	21
6.2	Overall concept of the proposed partial coefficient system	22
6.3	Partial Coefficient System Format for Single Failure Modes	24
6.4	Example of Design equations and Recommended Values of k_α and k_β . . .	26
6.5	Example of the use of the Partial Coefficient System	27
7	Acknowledgement	29
8	References	29

1 Introduction

Conventional design practice for coastal structures is deterministic in nature and is based on the concept of a design load, which should not exceed the resistance (carrying capacity) of the structure. The design load is usually defined on a probabilistic basis as a characteristic value of the load, e.g. the expectation (mean) value of the 100-year return period event, however, often without consideration of the involved uncertainties. The resistance is in most cases defined in terms of the load which causes a certain design impact or damage to the structure and is not given as an ultimate force or deformation. This is because most of the available design formulae only give the relationship between wave characteristics and structural response, e.g. in terms of run-up, overtopping, armour layer damage etc. An example is the Hudson formula for armour layer stability. Almost all such design formulae are semi-empirical being based mainly on central fitting to model test results. The often considerable scatter in test results is not considered in general because the formulae normally express only the mean values. Consequently, the applied characteristic value of the resistance is then the mean value and not a lower fractile as is usually the case in other civil engineering fields. The only contribution to a safety margin in the design is then the one inherent in the choice of the return period for the design load.

It is now more common to choose the return period with due consideration of the encounter probability, i.e. the probability that the design load value is exceeded during the structure lifetime. This is an important step towards a consistent probabilistic approach.

A safety factor or a conventional partial coefficient (as given in some national standards) might be applied too, in which cases the methods are classified as Level I (deterministic/quasi probabilistic) methods. However, such approaches do not allow the determination of the reliability (or the failure probability) of the design, and consequently it is neither possible to optimize, nor to avoid over-design of a structure. In order to overcome this problem more advanced probabilistic methods must be applied where the uncertainties (the stochastic properties) of the involved loading and strength variables are considered. Methods where the actual distribution functions for the variables are taken into account are denoted Level III methods. Level II methods comprise a number of methods in which a transformation of the generally correlated and non-normally distributed variables into uncorrelated and standard normal distributed variables is performed and reliability indices are used as measures of the structural reliability. Both Level II and III methods are discussed in the following. Described is also an advanced partial coefficient system which takes into account the stochastic properties of the variables and makes it possible to design to a specific failure probability level.

2 Failure modes and failure functions

Evaluation of structural safety is always related to the structural response as defined by the failure modes. Neglect of an important failure mode will bias the estimation of the safety of the structure.

Fig. 1 illustrates the failure modes for a conventional rubble mound breakwater with a capping wall.

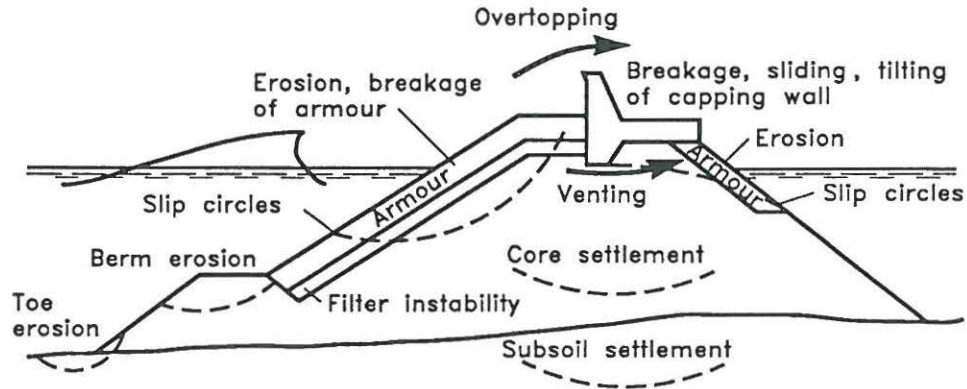


FIG. 1. Failure modes for a rubble mound breakwater.

Each failure mode must be described by a formula and the interaction (correlation) between the failure modes must be known. As an illustrative example let us consider only one failure mode, "hydraulic stability of the main armour layer", described by the Hudson formula

$$D_n^3 = \frac{H_s^3}{K_D \Delta^3 \cot \alpha} \quad (1)$$

where D_n is the nominal block diameter, $\Delta = \frac{\rho_s}{\rho_w} - 1$, where $\frac{\rho_s}{\rho_w}$ is the ratio of the block and water densities, α is the slope angle, H_s is the significant wave height and K_D is the coefficient signifying the degree of damage (movements of the blocks).

The formula can be split into load variables X_i^{load} and resistance variables, X_i^{res} . Whether a parameter is a load or a resistance parameter can be seen from the failure function. If a larger value results in a safer structure it is a resistance parameter and if a larger value results in a less safe structure it is a load parameter.

According to this definition one specific parameter can in one formula act as a load parameter while in another it can act as a resistance parameter. An example is the wave steepness in the van der Meer formulae for rock, which is a load parameter in the case of surging waves but a resistance parameter in the case of plunging waves. The only load variable in eq. (1) is H_s , while the others are resistance variables.

Eq. (1) is formulated as a *failure function* (performance function)

$$g = A \cdot \Delta \cdot D_n (K_D \cot \alpha)^{1/3} - H_s \begin{cases} < 0 & \text{failure} \\ = 0 & \text{limit state (failure)} \\ > 0 & \text{no failure (safe region)} \end{cases} \quad (2)$$

All the involved parameters are regarded as stochastic variables, X_i , except K_D , which signifies the *failure*, i.e. a specific damage level chosen by the designer. The factor A in

eq. (2) is also a stochastic variable signifying the uncertainty of the formula. In this case the mean value of A is 1.0.

In general eq. (2) is formulated as

$$g = R - S \quad (3)$$

where R stands for resistance and S for loading. Usually R and S are functions of many random variables, i.e.

$$R = R(X_1^{res}, X_2^{res}, \dots, X_m^{res}) \quad \text{and} \quad S = S(X_{m+1}^{load}, \dots, X_n^{load}) \quad \text{or} \quad g = g(\bar{X})$$

The limit state is given by

$$g = 0 \quad (4)$$

which is denoted the *limit state equation* and defines the so-called *failure surface* which separates the safe region from the failure region.

In principle R is a variable representing the variations in resistance between nominally identical structures, whereas S represents the maximum load effects within a period of time, say successive T years. The distributions of R and S are both assumed independent of time. The *probability of failure* P_f during any reference period of duration T years is then given by

$$P_f = \text{Prob} [g \leq 0] \quad (5)$$

The *reliability* \mathcal{R} is defined as

$$\mathcal{R} = 1 - P_f \quad (6)$$

3 Single failure mode probability analysis

3.1 Level III methods

A simple method – in principle – of estimation of P_f is the Monte Carlo method where a very large number of realisations x of the variables X are simulated. P_f is then approximated by the proportion of the simulations where $g \leq 0$.

The reliability of the method depends of course on a realistic assessment of the distribution functions for the variables X and their correlations.

Given $f_{\bar{X}}$ as the joint probability density function (jpdf) of the vector $\bar{X} = (X_1, X_2, \dots, X_n)$ then eq. (5) can be expressed by

$$P_f = \int_{R \leq S} f_{\bar{X}}(\bar{x}) d\bar{x} \quad (7)$$

Note that the symbol x is used for values of the random variable X .

If only two variables R and S are considered then eq. (7) reduces to

$$P_f = \int_{R \leq S} f_{(R,S)}(r,s) dr ds \quad (8)$$

which can be illustrated as shown in Fig. 2. If more than two variables are involved it is not possible to describe the jpdf as a surface but requires an imaginary multi-dimensional description.

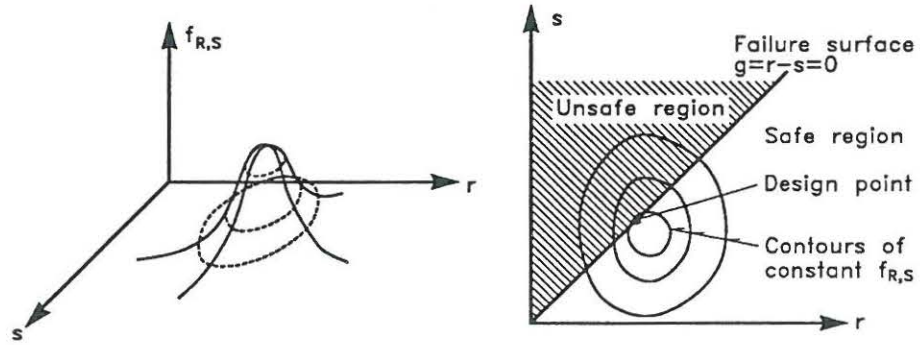


FIG. 2. Illustration of the two-dimensional joint probability density function for loading and strength.

Fig. 2 also shows the so-called *design point* which is the design on failure surface where the joint probability density function attains the maximum value, i.e. the most probable point of failure.

Unfortunately, the jpdf is seldom known. However, the variables can often be assumed independent (non-correlated) in which case eq. (7) is given by the n -fold integral

$$P_f = \int \int \int \dots \int_{R \leq S} f_{X_1}(x_1) \dots f_{X_n}(x_n) dx_1 \dots dx_n \quad (9)$$

where f_{X_i} are the marginal probability density function of the variables X_i . The amount of calculations involved in the multi-dimensional integration eq. (9) is enormous if the number of variables, n , is larger than say 5.

If only two variables are considered, say R and S , then eq. (9) simplifies to

$$P_f = \int \int_{R \leq S} f_R(r) f_S(s) dr ds \quad (10)$$

which by partial integration can be reduced to a single integral

$$P_f = \int_0^{\infty} F_R(x) f_S(x) dx \quad (11)$$

where F_R is the cumulative distribution function for R . Formally the lower integration limit should be $-\infty$ but is replaced by 0 since, in general, negative strength is not meaningful.

Eq. (11) can be explained as the product of the probabilities of two independent events, namely the probability that S lies in the range $x, x+dx$ (i.e. $f_S(x)dx$) and the probability that $R \leq x$ (i.e. $F_R(x)$), cf. Fig. 3.

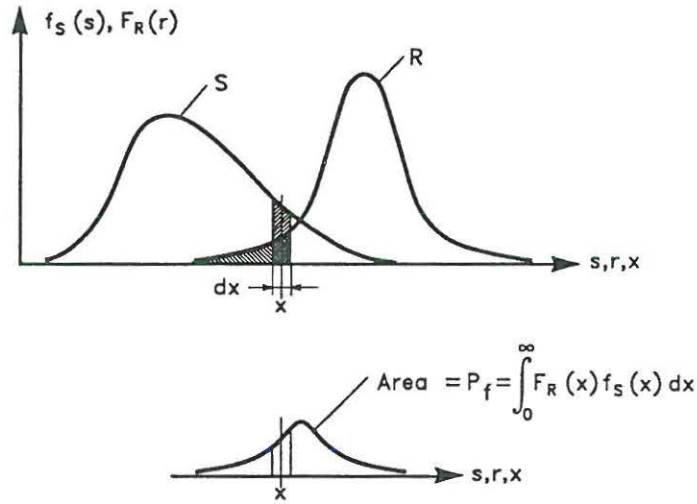


FIG. 3. Illustration of failure probability in case of two independent variables, S and R .

3.2 Level II methods

3.2.1 Linear failure functions of normal-distributed random variables

In the following is given a short introduction to calculations at level II. For a more detailed description see Hallam et al. (1977) and Thoft-Christensen and Baker (1982). Only the so-called *first-order reliability method* (FORM) where the failure surface is approximated by a tangent hyperplane at some point will be discussed. A more accurate method is the *second-order reliability method* (SORM) which uses a quadratic approximation to the failure surface.

Assume the loading $S(x)$ and the resistance $R(x)$ for a single failure mode to be statistically independent and with density functions as illustrated in Fig. 3. The failure function is given by eq. (3) and the probability of failure by eq. (10) or eq. (11).

However, these functions are in many cases not known but might be estimated only by their mean values and standard deviations. If we assume S and R to be independent normally distributed variables with known means and standard deviations, then the linear

failure function $g = R - S$ is normally distributed with mean value,

$$\mu_g = \mu_R - \mu_S \quad (12)$$

and

$$\text{standard deviation, } \sigma_g = (\sigma_R^2 + \sigma_S^2)^{0.5} \quad (13)$$

The quantity $(g - \mu_g) / \sigma_g$ will be unit standard normal and consequently

$$P_f = \text{prob}[g \leq 0] = \int_{-\infty}^0 f_g(x) dx = \Phi\left(\frac{0 - \mu_g}{\sigma_g}\right) = \Phi(-\beta) \quad (14)$$

where

$$\beta = \frac{\mu_g}{\sigma_g} \quad (15)$$

is a measure of the probability of failure and is denoted the *reliability index* (Cornell 1969), cf. Fig. 4 for illustration of β . Note that β is the inverse of the coefficient of variation and is the distance in terms of number of standard deviations from the most probable value of g (in this case the mean) to the failure surface, $g = 0$.

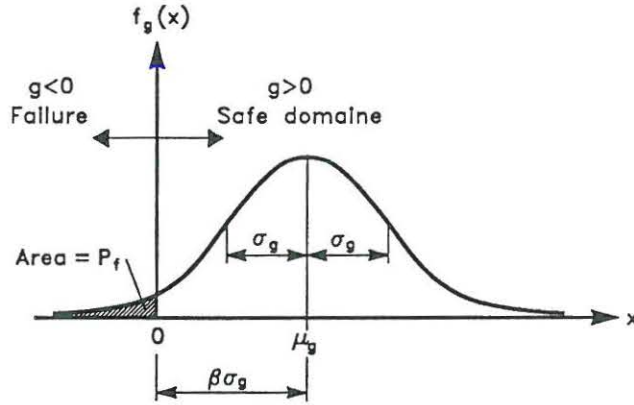


FIG. 4. Illustration of the reliability index.

If R and S are normally distributed and "correlated" then eq. (14) still holds but σ_g is given by

$$\sigma_g = (\sigma_R^2 + \sigma_S^2 + 2\rho_{RS} \sigma_R \sigma_S)^{0.5} \quad (16)$$

where ρ_{RS} is the *correlation coefficient*

$$\rho_{RS} = \frac{Cov[R, S]}{\sigma_R \sigma_S} = \frac{E[(R - \mu_R)(S - \mu_S)]}{\sigma_R \sigma_S} \quad (17)$$

R and S are said to be *uncorrelated* if $\rho_{RS} = 0$.

Besides the illustration of β in Fig. 4 a simple geometrical interpretation of β can be given in case of a linear failure function $g = R - S$ of the independent variables R and S by a transformation into a *normalized coordinate system* of the random variables $R' = (R - \mu_R)/\sigma_R$ and $S' = (S - \mu_S)/\sigma_S$, cf. Fig. 5.

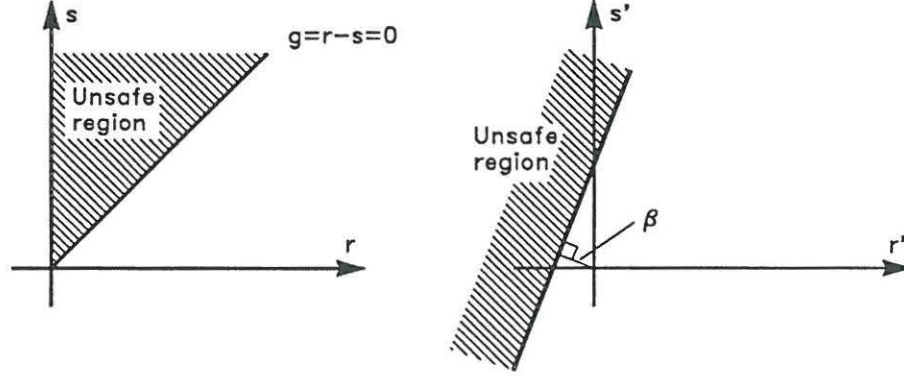


FIG. 5. Illustration of β in normalized coordinate system.

With these variables the failure surface $g = 0$ is linear and given by

$$R'\sigma_R - S'\sigma_S + \mu_R - \mu_S = 0 \quad (18)$$

By geometrical considerations it can be shown that the shortest distance from the origin to this linear failure surface is equal to

$$\beta = \frac{\mu_g}{\sigma_g} = \frac{\mu_R - \mu_S}{(\sigma_R^2 + \sigma_S^2)^{0.5}} \quad (19)$$

in which eqs. (12) and (13) are used.

3.2.2 Non-linear failure functions of normal-distributed random variables

If the failure function $g = g(\bar{X})$ is *non-linear* then approximate values for μ_g and σ_g can be obtained by using a *linearized failure function*.

Linearization is generally performed by Taylor-series expansion about some point retaining only the linear terms.

However, the values of μ_g and σ_g , and thereby also the value of β , depend on the choice of linearization point. Moreover, the value of β defined by eq. (15) will change when different but equivalent non-linear failure functions are used.

In order to overcome these problems a transformation of the basic variables $\bar{X} = (X_1, X_2, \dots, X_n)$ into a new set of normalized variables $\bar{Z} = (Z_1, Z_2, \dots, Z_n)$ is per-

formed. For *uncorrelated* normal distributed basic variables \bar{X} the transformation is

$$Z_i = \frac{X_i - \mu_{X_i}}{\sigma_{X_i}} \quad (20)$$

in which case $\mu_{Z_i} = 0$ and $\sigma_{Z_i} = 1$. By this linear transformation the *failure surface* $g = 0$ in the x -coordinate system is mapped into a failure surface in the z -coordinate system which also divides the space into a safe region and a failure region, cf. Fig. 6.

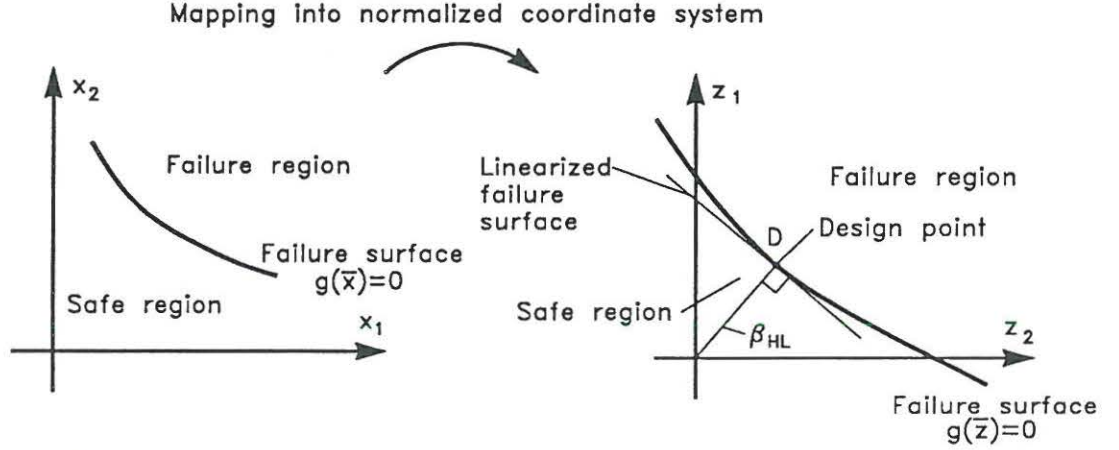


FIG. 6. Definition of the Hasofer and Lind reliability index, β_{HL} .

Fig. 6 introduces the Hasofer and Lind reliability index β_{HL} which is defined as the distance from origo to the nearest point, D , of the *failure surface* in the z -coordinate system. This point is called the *design point*. The coordinates of the design point in the original x -coordinate system are the most probable values of the variables \bar{X} at failure. β_{HL} can be formulated as

$$\beta_{HL} = \min_{g(\bar{z})=0} \left(\sum_{i=1}^n z_i^2 \right)^{0.5} \quad (21)$$

The special feature of β_{HL} as opposed to β is that β_{HL} is related to the failure "surface" $g(\bar{z}) = 0$ which is invariant to the failure function because equivalent failure functions result in the same failure surface.

The calculation of β_{HL} and the design point coordinates can be undertaken in a number of different ways. An iterative method must be used when the failure surface is non-linear. In the following a simple method is introduced.

Let θ denote the distance from the origin to any point at the failure surface given in the

normalized coordinate system

$$\begin{cases} \theta = \left[\sum_{i=1}^n z_i^2 \right]^{\frac{1}{2}} \\ g(z_1, z_2, \dots, z_n) = 0 \end{cases} \quad (22)$$

Construct the multiple function (Lagrange function)

$$\begin{aligned} F &= \theta + K_1 g \\ &= \left[z_1^2 + z_2^2 + \dots + z_n^2 \right]^{\frac{1}{2}} + K_1 g(z_1, z_2, \dots, z_n) \end{aligned} \quad (23)$$

where K_1 is an unknown constant (multiplier).

Maximum or minimum of θ occurs when

$$\begin{cases} \frac{\partial F}{\partial z_i} = [z_1^2 + z_2^2 + \dots + z_n^2]^{-\frac{1}{2}} \cdot z_i + K_1 \frac{\partial g}{\partial z_i} = 0 \quad i = 1, 2, \dots, n \\ g(z_1, z_2, \dots, z_n) = 0 \end{cases} \quad (24)$$

Assume that only one minimum exists and the coordinates of the design point D are given by

$$(z_1^d, z_2^d, \dots, z_n^d) = (\beta_{HL}\alpha_1, \beta_{HL}\alpha_2, \dots, \beta_{HL}\alpha_n) \quad (25)$$

Then

$$\begin{aligned} \theta_{min} &= \beta_{HL} = \left[\sum_{i=1}^n (\beta_{HL}\alpha_i)^2 \right]^{\frac{1}{2}} \quad \text{and consequently} \\ \sum_{i=1}^n \alpha_i^2 &= 1 \end{aligned} \quad (26)$$

Eq. (24) becomes

$$\begin{cases} \beta_{HL}^{-\frac{1}{2}} \cdot (\beta_{HL}\alpha_i) + K_1 \frac{\partial g}{\partial z_i} = 0 \quad i = 1, 2, \dots, n \\ g(\beta_{HL}\alpha_1, \beta_{HL}\alpha_2, \dots, \beta_{HL}\alpha_n) = 0 \end{cases} \quad (27)$$

or

$$\begin{cases} \alpha_i = \frac{-\frac{\partial g}{\partial z_i}}{\frac{\beta_{HL}^{-\frac{1}{2}}}{K_1}} = \frac{-\frac{\partial g}{\partial z_i}}{K} \\ g(\beta_{HL}\alpha_1, \beta_{HL}\alpha_2, \dots, \beta_{HL}\alpha_n) = 0 \end{cases} \quad (28)$$

Inserting eq. (28) into eq. (26) gives

$$K = \left[\sum_{i=1}^n \left(\frac{\partial g}{\partial z_i} \right)^2 \right]^{\frac{1}{2}} \quad (29)$$

The α -values defined by (25) are often called *sensitivity factors* (or influence factors) because α_i^2 provides an indication of the relative importance on the reliability index β_{HL} of the random variable X_i . If α_i^2 is small it might be considered to model X_i as a deterministic quantity equal to the median value of X_i . In such case the relative change in the reliability index by assuming X_i deterministic can be approximated by

$$\frac{\beta_{HL}(X_i : \text{deterministic})}{\beta_{HL}(X_i : \text{random})} \simeq \frac{1}{\sqrt{1 - \alpha_i^2}} \quad (30)$$

The corresponding change in failure probability can be found from eq. (14). Eq. (30) is used for the evaluation of a simplification of a failure function by reducing the number of random variables.

The sensitivity of β_{HL} to change in the value of a deterministic parameter b_i can be expressed by

$$\frac{d\beta_{HL}}{db_i} = \frac{1}{K} \frac{\partial g}{\partial b_i} \quad (31)$$

where K is given by eq. (29) and the partial derivative of g with respect to b_i is taken in the design point.

Eq. (31) is useful when it is considered to change a deterministic parameter (e.g. the height of wave wall) into a stochastic variable.

EXAMPLE 1

Consider the hydraulic stability of a rock armour layer given by the Hudson equation formulated as the failure function, cf. eqs. (1) and (2)

$$g = A \Delta D_n (K_D \cot \alpha)^{\frac{1}{3}} - H_s \quad (32)$$

all the parameters are regarded uncorrelated random variables X_i , except K_D which signifies the *failure criterion*, i.e. a certain damage level here chosen as 5% displacement corresponding to $K_D \simeq 4$. The factor A is also a random variable signifying the uncertainty of the formula.

All random variables are assumed normal distributed with known mean values and standard deviations, cf. Table 1. The normal distribution can be a bad approximation for H_s which is usually much better approximated by an extreme distribution, e.g. a Weibull or Gumbel distribution as will be discussed later. The normal distribution of H_s is used

here due to the simplicity involved but might be reasonable in case of depth limited wave conditions.

Table 1. Basic variables.

i	X_i	μ_{X_i}	σ_{X_i}	coefficient of variation σ_{X_i}/μ_{X_i}
1	A	1	0.18	18%
2	D_n	1.5 m	0.10 m	6.7%
3	H_s	4.4 m	0.70 m	16%
4	Δ	1.6	0.06	3.8%
5	$\cot\alpha$	2	0.10	5.0%

The failure surface corresponding to the failure function (32) reads for $K_D = 4$

$$A \Delta D_n (\cot\alpha)^{\frac{1}{3}} 1.59 - H_s = 0$$

or

$$X_1 X_4 X_2 X_5^{\frac{1}{3}} 1.59 - X_3 = 0 \quad (33)$$

By use of the transformation eq. (20) the failure surface in the normalized coordinate system is given by

$$(1 + 0.18 z_1) (1.6 + 0.06 z_4) (1.5 + 0.10 z_2) (2 + 0.10 z_5)^{\frac{1}{3}} 1.59 - (4.4 + 0.70 z_3) = 0$$

In order to make the calculations in this illustrative example more simple we neglect the small variational coefficients of Δ and $\cot\alpha$ and obtain

$$(1 + 0.18 z_1) \cdot 1.6 \cdot (1.5 + 0.10 z_2) \cdot 2^{\frac{1}{3}} \cdot 1.59 - (4.4 + 0.70 z_3) = 0 \quad (34)$$

or

$$0.864 z_1 + 0.32 z_2 + 0.058 z_1 z_2 - 0.70 z_3 + 0.40 = 0 \quad (35)$$

$$0.864 \beta_{HL} \alpha_1 + 0.32 \beta_{HL} \alpha_2 + 0.058 \beta_{HL}^2 \alpha_1 \alpha_2 - 0.70 \beta_{HL} \alpha_3 + 0.40 = 0$$

$$\beta_{HL} = \frac{-0.40}{0.864 \alpha_1 + 0.32 \alpha_2 + 0.058 \alpha_1 \alpha_2 \beta_{HL} - 0.70 \alpha_3}$$

By use of eq. (28)

$$\alpha_1 = -\frac{1}{K} (0.864 + 0.058 \beta_{HL} \alpha_2)$$

$$\alpha_2 = -\frac{1}{K} (0.32 + 0.058 \beta_{HL} \alpha_1)$$

$$\alpha_3 = \frac{0.7}{K}$$

By eq. (29)

$$K = \sqrt{(0.864 + 0.058 \beta_{HL} \alpha_2)^2 + (0.32 + 0.058 \beta_{HL} \alpha_1)^2 + (0.7)^2}$$

The iteration is now performed by choosing starting values for β_{HL} , α_1 , α_2 and α_3 and calculating new values until small modifications are obtained. This is shown in Table 2. The convergence is faster if a positive sign is used for α -values related to loading variables and a negative sign is used for α -values related to resistance variables.

Table 2.

	Iteration No.			
	start	1	2	3
β_{HL}	3.0	0.438	0.342	0.341
K		1.144	1.149	1.149
α_1	-0.50	-0.744	-0.747	-0.747
α_2	-0.50	-0.263	-0.266	-0.266
α_3	0.50	0.612	0.609	0.609

The probability of failure is then

$$P_f = \Phi(-\beta_{HL}) = \Phi(-0.341) = 0.367$$

The design point coordinates in the normalized z coordinate system are

$$\begin{aligned} (z_1^d, z_2^d, z_3^d) &= (\beta_{HL} \alpha_1, \beta_{HL} \alpha_2, \beta_{HL} \alpha_3) \\ &= (-0.255, -0.091, 0.208) \end{aligned}$$

Expression (26) $\beta_{HL} = \left(\sum_{i=1}^3 (z_i^d)^2 \right)^{\frac{1}{2}}$ provides a check on the design point coordinates.

Using the transformation

$$X_i^d = \mu_{X_i} + \sigma_{X_i} z_i^d$$

and the values of μ_{X_i} , σ_{X_i} given in Table 1 the design point coordinates in the original x

coordinate system are found to be

$$(x_1^d, x_2^d, x_3^d) = (0.954, 1.491, 4.546)$$

The relative importance of the random variables to the failure probability is evaluated through the α^2 -values. Table 3 shows that the uncertainty related to D_n is of minor importance compared to the uncertainties on A and H_s .

Table 3.

i	X_i	α_i	α_i^2 (%)	$\frac{\beta_{HL}(X_i : \text{deterministic})}{\beta_{HL}(X_i : \text{random})}$ $\simeq \frac{1}{\sqrt{1-\alpha_i^2}}$	$\frac{P_f(X_i : \text{deterministic})}{P_f(X_i : \text{random})}$
1	A	-0.747	55.8	1.50 *)	0.831 *)
2	D_n	-0.266	7.1	1.04	0.989
3	H_s	0.609	37.1	1.26 *)	0.899 *)
100.0					

*) The assumption of validity only for small α -values is not fulfilled

If all 5 parameters in the Hudson formula was kept as random variables with mean values and standard deviations as given in Table 1 then the corresponding values would be as shown in Table 4.

Table 4.

i	X_i	α_i	α_i^2 (%)	$\frac{\beta_{HL}(X_i : \text{deterministic})}{\beta_{HL}(X_i : \text{random})}$ $\simeq \frac{1}{\sqrt{1-\alpha_i^2}}$	$\frac{P_f(X_i : \text{deterministic})}{P_f(X_i : \text{random})}$
1	A	-0.705	49.7	1.41 *)	0.857 *)
2	D_n	-0.275	7.6	1.04	0.986
3	H_s	0.631	39.8	1.29 *)	0.896 *)
4	Δ	-0.154	2.3	1.01	0.999
5	$\cot\alpha$	-0.068	0.5	1.00	1.000
100.0					

*) The assumption of validity only for small α -values is not fulfilled

It is clearly seen why Δ and $\cot\alpha$ can be regarded as constants.

If the normally distributed basic variables \bar{X} are *correlated* the procedure given above can be used if a transformation into non-correlated variables \bar{Y} is performed before normalizing the variables (Thoft-Christensen et al. 1982).

3.2.3 Non-linear failure functions containing non-normal distributed random variables

It is not always a reasonable assumption to consider the random variables normally distributed. This is for example the case for parameters such as H_s characterizing the sea state in long-term wave statistics. H_s will in general follow extreme distributions (e.g. Gumbel and Weibull) quite different from the normal distribution, and cannot be described only by the mean value and the standard deviation.

For such cases it is still possible to use the reliability index β_{HL} but an extra transformation of the non-normal basic variables into normal basic variables must be performed before β_{HL} can be determined as described above.

A commonly used transformation is based on the substitution of the non-normal distribution of the basic variable X_i by a normal distribution in such a way that the density and distribution functions f_{X_i} and F_{X_i} are unchanged at the design point.

If the design point is given by $x_1^d, x_2^d, \dots, x_n^d$ then the transformation reads

$$\begin{aligned} F_{X_i}(x_i^d) &= \Phi\left(\frac{x_i^d - \mu'_{X_i}}{\sigma'_{X_i}}\right) \\ f_{X_i}(x_i^d) &= \frac{1}{\sigma'_{X_i}} \varphi\left(\frac{x_i^d - \mu'_{X_i}}{\sigma'_{X_i}}\right) \end{aligned} \quad (36)$$

where μ'_{X_i} and σ'_{X_i} are the mean and standard deviation of the approximate (fitted) normal distribution.

From eq. (36) is obtained

$$\begin{aligned} \sigma'_{X_i} &= \frac{\varphi\left(\Phi^{-1}\left(F_{X_i}(x_i^d)\right)\right)}{f_{X_i}(x_i^d)} \\ \mu'_{X_i} &= x_i^d - \Phi^{-1}\left(F_{X_i}(x_i^d)\right) \sigma'_{X_i} \end{aligned} \quad (37)$$

Eq. (36) can also be written

$$F_{X_i}(x_i^d) = \Phi\left(\frac{x_i^d - \mu'_{X_i}}{\sigma'_{X_i}}\right) = \Phi(z_i^d) = \Phi(\beta_{HL}\alpha_i)$$

Solving with respect to x_i^d gives

$$x_i^d = F_{X_i}^{-1}[\Phi(\beta_{HL}\alpha_i)] \quad (38)$$

The iterative method presented above for calculation of β_{HL} can still be used if for each step of iteration the values of σ'_{X_i} and μ'_{X_i} given by eq. (37) are calculated for those variables where the transformation (36) has been used.

For correlated random variables the transformation into non-correlated variables is used before normalization.

3.2.4 Time-variant random variables

The failure functions within breakwater engineering are generally of the form

$$g = f_1(\bar{r}) - f_2(H_s, W, T_m) \quad (39)$$

where \bar{R} represents the resistance variables and H_s , W and T_m are the load variables signifying the wave height, the water level and the wave period. The random variables are in general time-variant. The calculated reliability is related to the life time of structure. For load variables, such as H_s , the uncertainty increases with longer life time. On the other hand, the resistance parameters, such as concrete strength, is deteriorating. For full discussion on time-variant random variables, reference is made to Burcharth (1993).

4 Failure probability analysis of failure mode systems

It is clear from Fig. 1 that a breakwater can be regarded as a system of components which can either fail or function. Due to interactions between the components, failure of one component may impose failure of another component and even lead to failure of the system. A so-called *fault tree* is often used to clarify the relations between the failure modes.

A fault tree describes the relations between the failure of the system (e.g. excessive wave transmission over a breakwater protecting a harbour) and the events leading to this failure. Fig. 7 shows a simplified example based on some of the failure modes indicated in Fig. 1.

A fault tree is a simplification and a systematization of the more complete so-called cause-consequence diagram which indicates the causes of partial failures as well as the interactions between the failure modes. An example is shown in Fig. 8.

The failure probability of the system, e.g. the probability of excessive wave transmission in Fig. 7, depends on the failure probability of the single failure modes and on the correlation and linking of the failure modes.

The failure probability of a single failure mode can be estimated by the methods described in chapter 3. Two factors contribute to the correlation, namely *physical interaction*, such as sliding of main armour caused by erosion of a supporting toe berm, and *correlation through common parameters* like H_s . The correlations caused by physical interactions are not yet quantified. Consequently, only the common-parameter-correlation can be dealt with in a quantitative way. However, it is possible to calculate upper and lower bounds for the failure probability of the system.


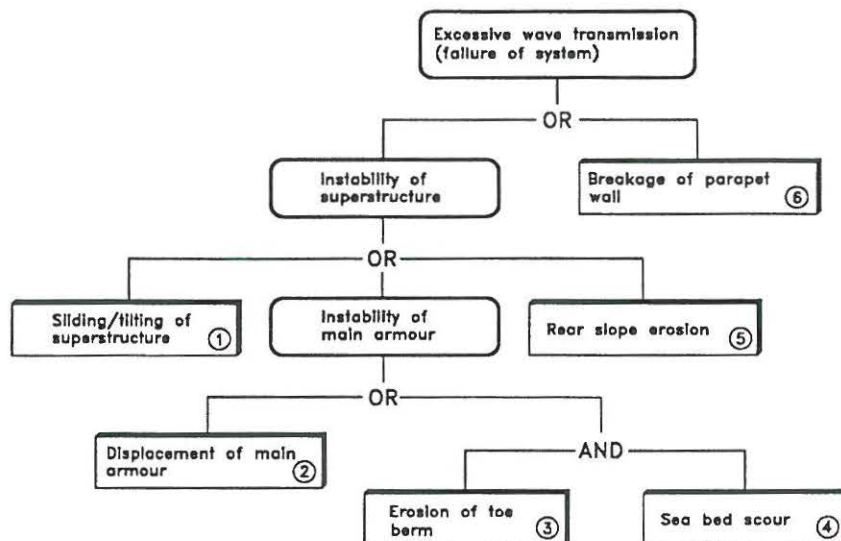


FIG. 7. Example of simplified fault tree for a breakwater.

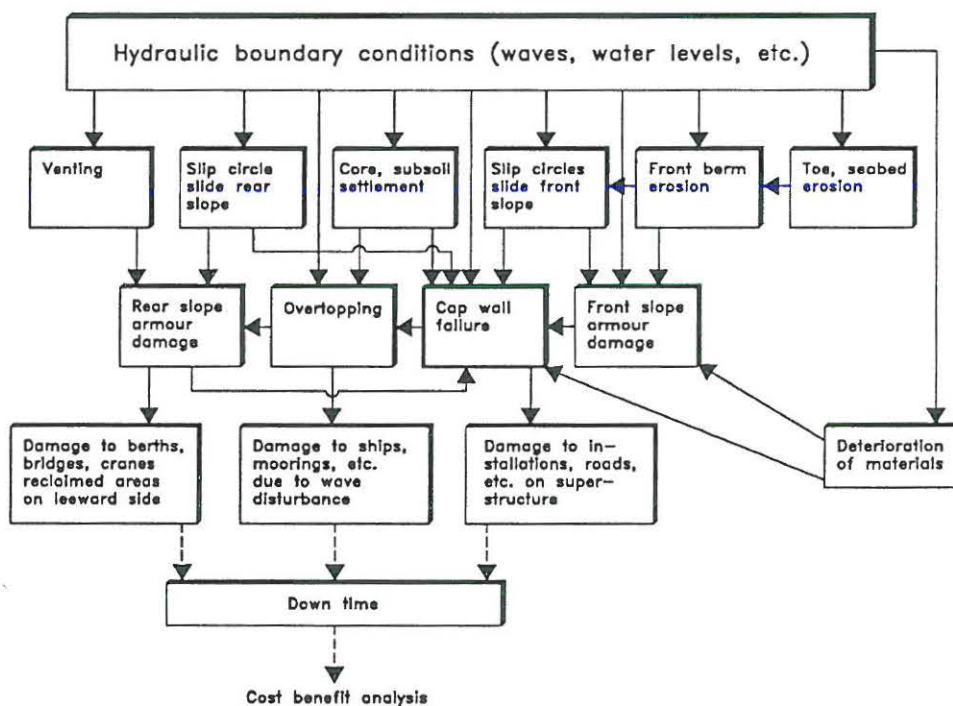

Only hydraulic loads are shown. Other types of loads are for example: SHIP COLLISION - SEISMIC ACTIVITY - AGGRESSIVE HUMAN ACTION (SABOTAGE, WAR, Etc.)

FIG. 8. Example of cause-consequence diagram for a rubble mound breakwater.

A system can be split into two types of fundamental systems, namely series systems and parallel systems, Fig. 9.

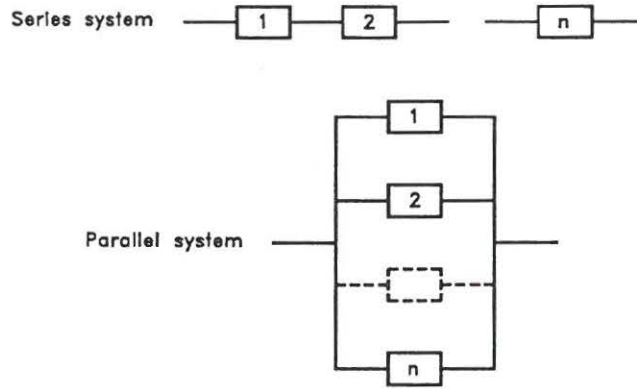


FIG. 9. Series and parallel systems.

Series systems

In a series system failure occurs if any of the elements $i = 1, 2, \dots, n$ fails. The upper and lower bounds of the failure probability of the system, P_{fS} are

$$\text{Upper bound } P_{fS}^U = 1 - (1 - P_{f1})(1 - P_{f2}) \dots (1 - P_{fn}) \quad (40)$$

$$\text{Lower bound } P_{fS}^L = \max P_{fi} \quad (41)$$

where $\max P_{fi}$ is the largest failure probability among all elements. The upper bound corresponds to no correlation between the failure modes and the lower bound to full correlation. Eq. (40) is sometimes approximated by $P_{fS}^U = \sum_{i=1}^n P_{fi}$ which is applicable only for small P_{fi} because P_{fS}^U should not be larger than one.

The OR-gates in a fault tree corresponds to series components. Series components are dominating in breakwater fault trees. Really, the AND-gate in Fig. 7 is included for illustration purpose and is better substituted by an OR-gate.

Parallel systems

A parallel system fails only if all the elements fail.

$$\text{Upper bound } P_{fS}^U = \min P_{fi} \quad (42)$$

$$\text{Lower bound } P_{fS}^L = P_{f1} \cdot P_{f2} \dots P_{fn} \quad (43)$$

The upper bound corresponds to full correlation between the failure modes and the lower bound to no correlation.

The AND-gates in a fault tree correspond to parallel components.

In order to calculate upper and lower failure probability bounds for a system it is convenient to decompose it into series and parallel systems. Fig. 10 shows a decomposition of the fault tree, Fig. 7.

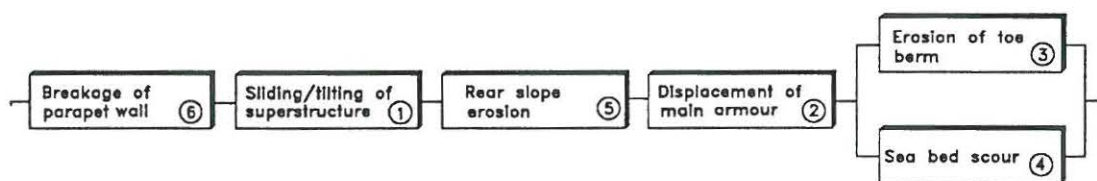


FIG. 10. Decomposition of the fault tree Fig. 8 into series and parallel systems.

The real failure probability of the system P_{fS} will always be in between P_{fS}^U and P_{fS}^L because some correlation exists between the failure modes due to the common sea state parameters, e.g. H_s .

It would be possible to estimate P_{fS} if the physical interactions between the various failure modes were known and described by formulae and if the correlations between the involved parameters were known. However, the procedure for such correlations are very complicated and are in fact not yet fully developed for practical use.

The probability of failure cannot in itself be used as the basis for an optimization of a design. This is because an optimization must be related to a kind of measure (scale) which for most structures is the economy, but other measures such as loss of human life (without considering some cost of a life) are also used.

The so-called *risk*, defined as the product of the probability of failure and the economic consequences is used in optimization considerations. The economic consequences must cover all kind of expenses related to the failure in question, i.e. cost of replacement, down-time costs etc.

5 Uncertainties related to parameters determining the reliability of the structure

Calculation of reliability or failure probability of a structure is based on formulae describing its response to loads and on information about the uncertainties related to the formulae and the involved parameters.

Basically, uncertainty is best given by a probability distribution. Because the distribution is rarely known it is common to assume a normal distribution and a related coefficient of

variation

$$\sigma' = \frac{\sigma}{\mu} = \frac{\text{standard deviation}}{\text{mean value}} \quad (44)$$

as the measure of the uncertainty.

The word uncertainty is here used as a general term referring both to errors, to randomness and to lack of knowledge.

5.1 Uncertainty related to failure mode formulae

The uncertainty of a formula can be considerable. This is clearly seen from many diagrams presenting the formula as a nice curve shrouded in a wide scattered cloud of data points (usually from experiments) which are the basis for the curve fitting. Coefficients of variation of 15-20% or even larger are quite normal.

The range of validity and the related coefficient of variation should always be considered when using a formula.

5.2 Uncertainty related to environmental parameters

The sources of uncertainty contributing to the total uncertainties in environmental design values are categorized as:

1. Errors related to instrument response (e.g. from accelerometer buoy and visual observations)
2. Variability and errors due to different and imperfect calculations methods (e.g. wave hindcast models, algorithms for timeseries analysis)
3. Statistical sampling uncertainties due to short-term randomness of the variables (variability within a stochastic process, e.g. two 20 min. records from a stationary storm will give two different values of the significant wave height)
4. Choise of theoretical distribution as a representative of the unknown long-term distribution (e.g. a Weibull and a Gumbel distribution might fit a data set equally well but can provide quite different values of a 200-year event).
5. Statistical uncertainties related to extrapolation from short samples of data sets to events of low probability of occurrence.
6. Statistical vagaries of the elements

It is beyond the scope of this contribution to discuss in more detail the mentioned uncertainty aspects related to the environmental parameters. Reference is given to Burcharth (1989).

5.3 Uncertainty related to structural parameters

The uncertainties related to material parameters (like density) and geometrical parameters (like slope angle and size of structural elements) are generally much smaller than the uncertainties related to the environmental parameters and to the design formulae.

6 Introduction of a partial coefficient system for implementation of a given reliability in the design

The following presentation explains in short the partial coefficient system developed and proposed by Subgroup-F under the PIANC PTC II Working Group 12 on Rubble Mound Breakwaters. For more details reference is made to Burcharth (1991).

6.1 Introduction to partial coefficients

The objective of the use of partial coefficients is to assure a certain reliability of the structures.

The partial coefficients, γ_i , are related to characteristic values of the stochastic variables, $X_{i,ch}$. In conventional civil engineering codes the characteristic values of loads and other action parameters are often chosen to be an upper fractile (e.g. 5%), while the characteristic values of material strength parameters are chosen to be the mean values. The values of the partial coefficients are uniquely related to the applied definition of the characteristic values.

The partial coefficients, γ_i , are usually larger than or equal to one. Consequently, if we define the variables as either load variables X_i^{load} (as for example H_s) or resistance variables X_i^{res} (as for example the block volume) then the related partial coefficients should be applied as follows to obtain the design values

$$X_i^{design} = \gamma_i^{load} \cdot X_{i,ch}^{load} \quad (45)$$

$$X_i^{design} = \frac{X_{i,ch}^{res}}{\gamma_i^{res}}$$

The magnitude of γ_i reflects both the uncertainty on the related parameter X_i , and the relative importance of X_i in the failure function. A large value, e.g. $\gamma_{H_s} = 1.4$, indicates a relatively large sensitivity of the failure probability to the significant wave height, H_s . On the other hand, $\gamma_i \simeq 1$ indicates no or negligible sensitivity in which case the partial coefficient should be omitted. It is to be stressed that the magnitude of γ_i is not – in a mathematical sense – a stringent measure of the sensitivity of the failure probability to the parameter, X_i .

When the partial coefficients are applied to the characteristic values of the parameters in eq. (2) we obtain the **design equation**, i.e. the definition of how to apply the coefficients.

The partial coefficients can be related either to each parameter or to combinations of the parameters (overall coefficients). In the first case we obtain the design equation

$$G = \frac{Z_{ch}}{\gamma_z} \frac{\Delta_{ch}}{\gamma_{\Delta}} \frac{D_{n,ch}}{\gamma_{Dn}} \left(K_D \frac{\cot \alpha_{ch}}{\gamma_{\cot \alpha}} \right)^{1/3} - \gamma_{H_s} H_{s,ch} \geq 0$$

(46)

or

$$D_{n,ch} \geq \gamma_z \gamma_{\Delta} \gamma_{Dn} \gamma_{\cot \alpha}^{1/3} \gamma_{H_s} \frac{H_{s,ch}}{Z_{ch} \Delta_{ch} K_D \cot \alpha_{ch}}$$

In the second case we could for example have only γ_{H_s} and an overall coefficient γ_z related to the first term on the right hand side of eq. (2). The design equation would then be

$$G = \frac{Z_{ch}}{\gamma_z} \Delta_{ch} D_{n,ch} (K_D \cot \alpha)^{1/3} - \gamma_{H_s} H_{s,ch} \geq 0$$

(47)

or

$$D_{n,ch} \geq \gamma_z \gamma_{H_s} \frac{H_{s,ch}}{Z_{ch} \Delta_{ch} (K_D \cot \alpha_{ch})^{1/3}}$$

Eqs. (46) and (47) express two different “code formats”. By comparing the two equations it is seen that the product of the partial coefficients is independent of the chosen format, other things equal. It is desirable to have a system which is as simple as possible, i.e. as few partial coefficients as possible, but without invalidating the accuracy of the design equation beyond acceptable limits.

Fortunately, it is very often possible to use overall coefficients, like γ_z in eq. (47), without losing significant accuracy within the realistic range of combinations of parameter values. This is the case for the system proposed in this paper where only two partial coefficients, γ_{H_s} and γ_z , are used in each design formula.

Usually several failure modes are relevant to a design. The relationship between the failure modes are characterized either as series systems or parallel systems. A fault tree can be used to illustrate the complete system. The partial coefficients for failure modes being in a system with failure probability, P_f are different from the partial coefficients for the single failure modes with the same failure probability, P_f . Therefore, partial coefficients for single failure modes and multi failure mode systems are treated separately.

6.2 Overall concept of the proposed partial coefficient system

In existing civil engineering codes of practise, e.g. for steel and concrete structures, it is a characteristic of them that

- partial coefficients are related to combinations of basic variables rather than to each of them in order to reduce the number of coefficients.
- the partial coefficients reflect the safety level inherent in a large number of well proven designs. Two sets of coefficients covering permanent and preliminary structures are usually given, but the related average probabilities of failure are not specified. In other words, it is not possible by means of the normal structural codes to design a structure to a predetermined failure probability.

However, it is not advisable to copy this concept in safety recommendations for rubble mound breakwaters for the following reasons:

- For coastal structures and breakwaters there is no generally accepted tradition which reflects one or more levels of failure probability. On the contrary it is certain that the safety level of existing structures varies considerably and is often very low. Besides, it is very difficult to evaluate the safety level of existing coastal structures and breakwaters because of lack of information, especially on the environmental conditions, e.g. the water level variations and the wave climate. Consequently, it is not possible to produce sets of partial coefficients which, in a meaningful way, are calibrated against existing designs.
- Due to the very nature of coastal engineering where design optimization dictates considerable variations in the safety level of the various structures it is necessary (advisable) to have sets of partial coefficients which correspond to various failure probabilities. In other words the designer and the client decide on the basis of optimization and cost benefit analyses that the structure should be designed for a specific safety level (for example 20% probability of failure ($P_f = 20\%$) within a structural lifetime of $T = 80$ years, where failure is defined as a certain degree damage). The code should then contain a set of partial coefficients corresponding to this failure probability.
- Because the quality of information about the long term wave climate (the dominating load) varies from very unreliable (uncertain) wave statistics based on few uncertain data sets to very reliable statistics based on many years of high quality wave recordings and hindcast values it is necessary that the partial coefficients must be a function of the quality of the available information on the wave climate. This means that the statistical uncertainty due to limited number of wave data and errors in the wave data should be implemented.

Extensive calculations, performed at University of Aalborg, of partial coefficients for armour layer stability formulae demonstrated that it was possible to develop a concept which satisfies these demands.

The partial coefficients γ_i were determined from a so-called level II reliability analysis. The applied computer programmes BWREL (Break Water REliability programme) and BWCODE (Break Water CODE) were developed at the University of Aalborg by Dr. John Dalsgaard Sørensen especially for the reliability analysis of breakwaters. For further explanation reference is made to Burcharth (1991).

6.3 Partial Coefficient System Format for Single Failure Modes

For each failure mode only two partial coefficients γ_{H_s} and γ_z are used, cf. the example given by eq. (47). The partial coefficient are determined from formulae. Three different concepts for these formulae have been evaluated and the following were chosen as being acceptable with respect to deviations from the target probability of failure.

$$\gamma_{H_s} = \frac{\hat{H}_s^{T_{P_f}}}{\hat{H}_s^T} + \sigma'_{F_{H_s}} \left(1 + \left(\frac{\hat{H}_s^{3T}}{\hat{H}_s^T} - 1 \right) k_\beta P_f \right) + \frac{k_s}{\sqrt{P_f N}} \quad (48)$$

$$\gamma_z = 1 - k_\alpha \ln P_f \quad (49)$$

where

\hat{H}_s^T is the central estimate of the T -year return period value of H_s , where T is the structural lifetime ($T = 20, 50$ and 100 years were used for the code calibration). γ_{H_s} is applied to \hat{H}_s^T (the characteristic value of H_s , cf. the design equations).

\hat{H}_s^{3T} is the central estimate of the $3T$ -year return period value of H_s .

$\hat{H}_s^{T_{P_f}}$ is the central estimate of H_s corresponding to an equivalent return period T_{P_f} defined as the return period corresponding to a probability P_f that $\hat{H}_s^{T_{P_f}}$ will be exceeded during the structural lifetime T . T_{P_f} is calculated from the encounter probability formula $T_{P_f} = \left(1 - (1 - P_f)^{\frac{1}{T}} \right)^{-1}$, cf. Fig. 11.

$\sigma'_{F_{H_s}}$ is the variational coefficient of a function F_{H_s} modelled as a factor on H_s . F_{H_s} signifies the measurement errors and short term variability of H_s and has the mean value 1.0. The statistical uncertainty on H_s is not included in F_{H_s} .

N is the number of H_s data, used for fitting the extreme distributions. The statistical uncertainty depends on this parameter.

k_α, k_β and k_s are coefficients which are determined by optimization. $k_s \simeq 0.05$ for all failure modes. The k_α and the k_β values are given in Tables 5-8.

The first term in eq. (48) gives the correct γ_{H_s} provided no statistical uncertainty and measurement errors related to H_s are present. The middle term in eq. (48) signifies the measurement errors and the short term variability related to the wave data. The last term in eq. (48) signifies the statistical uncertainty of the estimated extreme distribution of H_s . The statistical uncertainty depends on the total number of wave data, N , but not on the length of the period of observation, as might be expected. The 10 largest values of H_s over

a 15 years period provides a much more reliable estimate of the extreme distribution than the 10 largest values of H_s over 1 year. However, in the statistical analysis it is assumed that the data samples are equally representative of the true distribution. In other words it is assumed that the data, besides being non-correlated, are sampled with a frequency and over a length of time which ensures that periodic variations (e.g. seasonal) are not biasing the sample. The designer must be aware of these restrictions.

If the extreme wave statistics is not based on N wave data, but for example on estimates of H_s from information about water level variations in shallow water, then the last term in eq. (48) disappears and instead the value of σ'_{FH_s} must account for the inherent uncertainty.

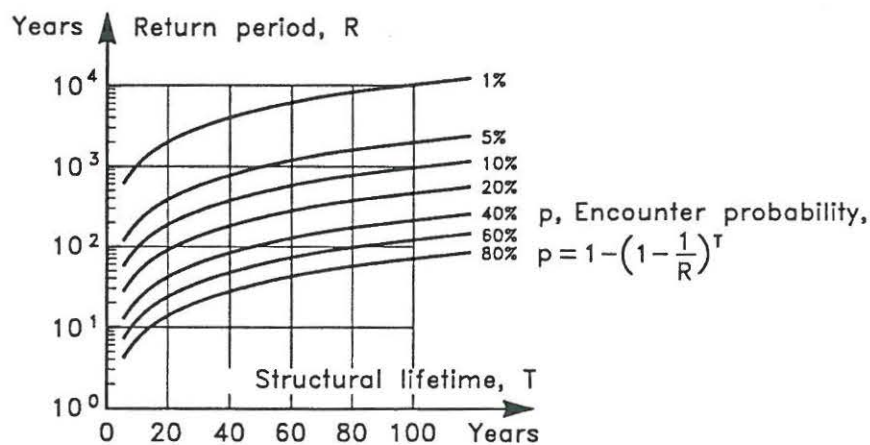


FIG. 11. Encounter probability, i.e. the probability p that the R -year return period event will be exceeded during a T -year structural life.

6.4 Example of Design equations and Recommended Values of k_α and k_β

The values of k_α and k_β which have been obtained by carrying out optimization for each failure modes are presented as well as the related design equations in Tables 5-8. Note that limitations related to the equations are not given here.

Table 5. Main armour hydraulic stability.

Formula	Design equation	k_α	k_β
Hudson, rock	$\frac{1}{\gamma_z} \Delta D_{n50} (K_d \cot \alpha)^{1/3} \geq \gamma_{H_s} H_s^T$	0.036	151
Van der Meer, rock			
Plunging waves	$\frac{1}{\gamma_z} 6.2 S^{0.2} P^{0.18} \Delta D_{n50} \cot \alpha^{0.5} s_m^{0.25} N_z^{-0.1} \geq \gamma_{H_s} H_s^T$	0.027	38
Surging waves	$\frac{1}{\gamma_z} S^{0.2} P^{-0.13} \Delta D_{n50} \cot \alpha^{0.5-P} s_m^{-0.5P} N_z^{-0.1} \geq \gamma_{H_s} H_s^T$	0.031	38
Van der Meer			
Tetrapods	$\frac{1}{\gamma_z} \left(3.75 \frac{N_{od}^{0.5}}{N_z^{0.25}} + 0.85 \right) s_m^{-0.2} \Delta D_n \geq \gamma_{H_s} H_s^T$	0.026	38
$\cot \alpha = 1.5$			
Van der Meer			
Cubes	$\frac{1}{\gamma_z} \left(6.7 \frac{N_{od}^{0.4}}{N_z^{0.3}} + 1.0 \right) s_m^{-0.1} \Delta D_n \geq \gamma_{H_s} H_s^T$	0.026	38
$\cot \alpha = 1.5$			
Burcharth			
Dolos	$\frac{1}{\gamma_z} \Delta D_n (47 - 72r) \varphi_{n=2} D^{1/3} N_z^{-0.1} \geq \gamma_{H_s} H_s^T$	0.025	38
$\cot \alpha = 1.5$			
	r Dolos waist ratio		
	φ packing density		
	D relative number of units displaced		

Table 6. Hydraulic stability of low crested rock breakwaters.

Formula	Design equation	k_α	k_β
Van der Meer, rock	As for main armour with factor $f_i = \left[1.25 - 4.8 \frac{R_c}{H_s^T} \left(\frac{S_m}{2\pi} \right)^{0.5} \right]^{-1}$ <p>applied to D_{n50}</p>	0.035	42

Table 7. Hydraulic stability of rock toe berm.

Formula	Design equation	k_α	k_β
Van der Meer, rock	$\frac{1}{\gamma_z} 8.7 \left(\frac{h_t}{h} \right)^{1.43} \Delta D_{n50} \geq \gamma_{H_s} H_s^T$	0.087	100

Table 8. Run-up on rock armoured slopes.

Formula	Design equation	k_α	k_β
Hunt	for $(\cot\alpha)^{-1} s_m^{-0.5} < 1.5$ $\frac{1}{\gamma_z} R_u a^{-1} \cot\alpha s_m^{0.5} \geq \gamma_{H_s} H_s^T$	0.036	44
	for $(\cot\alpha)^{-1} s_m^{-0.5} > 1.5$ $\frac{1}{\gamma_z} R_u b^{-1} [\cot\alpha s_m^{0.5}]^c \geq \gamma_{H_s} H_s^T$	0.018	36

6.5 Example of the use of the Partial Coefficient System

The following example will illustrate how the partial coefficient system is applied for design purpose.

Objective:

Determination of the average mass, or the nominal diameter D_{n50} , of quarry rock armour corresponding to the following design conditions:

Case 1. Moderate to severe damage with a probability $P_f = 0.2$ within a structural life of $T = 50$ years.

Case 2. Very severe damage (failure) with a probability $P_f = 0.2$ within a structural life of $T = 100$ years.

Case 3. Moderate to severe damage with a probability $P_f = 0.1$ within a structural life of $T = 100$ years.

The Van der Meer formulae for rock given in Table 5 are assumed valid.

Design parameters:

Densities: Rock 2.8 t/m^3 , water 1.03 t/m^3 , $\Delta = 1.72$

Slope: $\cot\alpha = 1.5$, porosity $P = 0.4$

Wave climate: Weibull distribution of H_s with the site specific coefficients $(\alpha, \beta, H'_s) = (1.39, 1.06, 0.44)$ determined by fitting to a hind-casted H_s -data set consisting of the $N = 50$ largest values within a 12 years period, i.e. $\lambda = 50/12 = 4.17$. σ'_{FH_s} is estimated to 0.2 for the hindcasted H_s values. Wave steepness $s_m = 0.04$, number of waves $N_z = 2500$.

Damage: Moderate to severe damage $S = 6$, very severe damage (failure) $S = 14$.

Procedure:

The procedure and the partial coefficient formulae described in section 6.3 are used.

Calculations:

In case of a Weibull distribution the central estimate of the significant wave height with an average return period of T years is given by

$$\hat{H}_s^T = H'_s + \beta (\exp[\ln(\ln(\lambda T))/\alpha]) = 0.44 + 1.06 (\exp[\ln(\ln(4.17T))/1.39])$$

The equivalent return period is given by $T_{P_f} = (1 - (1 - P_f)^{\frac{1}{T}})^{-1}$

From this is obtained

Case	T (year)	P_f	T_{P_f} (year)	\hat{H}_s^T (m)	\hat{H}_s^{3T} (m)	$\hat{H}_s^{T_{P_f}}$ (m)
1	50	0.2	225	3.98	4.49	4.67
2	100	0.2	449	4.30	4.80	4.97
3	100	0.1	950	4.30	4.80	5.29

From Table 5 (for plunging waves) $k_\alpha = 0.027$, $k_\beta = 38$

From the formulae

$$\gamma_{H_s} = \frac{\hat{H}_s^{T_{P_f}}}{\hat{H}_s^T} + \sigma'_{FH_s} \left(1 + \left(\frac{\hat{H}_s^{3T}}{\hat{H}_s^T} - 1 \right) k_\beta P_f \right) + \frac{0.05}{\sqrt{P_f N}}$$

$$\gamma_Z = 1 - k_\alpha \ln P_f$$

and the Van der Meer design equation is obtained

Case	γ_{H_s}	γ_Z	D_{n50} (m)	Average mass (t)
1	1.23	1.04	1.58	11.0
2	1.22	1.04	1.43	8.1
3	1.35	1.06	1.91	19.5

The example illustrates how easy it is to calculate the size of the armour for various design conditions. The system facilitates economical optimization of a design.

The system can be used also for the evaluation of the failure probability of existing structures.

7 Acknowledgement

The useful comments of Dr. Zhou Liu and Dr. J. Dalsgaard Sørensen are greatly acknowledged.

8 References

- BURCHARTH, H.F. (1989) Uncertainties related to environmental data and estimated extreme events. Report of Subgroup-B, PIANC PTCII Working Group 12 on Rubble Mound Breakwaters. (In print by PIANC 1992)
- BURCHARTH, H.F. (1991) Introduction of partial coefficients in the design of rubble mound breakwaters. Proc. Conf. on Coastal Structures and Breakwaters. Inst. of Civil Eng., London.
- BURCHARTH, H.F. (1991) Development of a partial coefficient system for the design of rubble mound breakwaters. Report of Subgroup-F. PIANC PTC II Working Group 12 on Rubble Mound Breakwaters. (In print by PIANC 1992)
- BURCHARTH, H.F. (1993) Reliability evaluation of a structure at sea. Proc. of Short Courses at ICCE '92, Venice, Italy.
- HALLAM, M.G., HEAF, N.I. and WOOTOS, I.R. (1977). Rationalization of Safety and Serviceability factors in Structural Codes. CIRIA report No. 63, London.
- THOFT-CHRISTENSEN, P. and BAKER, M.J. (1982). Structural Reliability Theory and its Application. Springer Verlag. Berlin.
- WEN, Y.K. and CHEN, H.C. (1987). On fast integration for time variant structural reliability. *Probabilistic Engineering Mechanics*, Vol.2, 1987, pp 156-162.