



Aalborg Universitet

AALBORG UNIVERSITY
DENMARK

Biomechanical investigation of a passive upper extremity exoskeleton for manual material handling – A computational parameter study

Seiferheld, Bo Eitel; Frost, Jeppe; Krog, Mathias; Skals, Sebastian Laigaard; Andersen, Michael Skipper

Published in:

Program & Abstracts: 12th Annual Meeting of the Danish Society of Biomechanics.

Publication date:
2020

Document Version
Accepted author manuscript, peer reviewed version

[Link to publication from Aalborg University](#)

Citation for published version (APA):

Seiferheld, B. E., Frost, J., Krog, M., Skals, S. L., & Andersen, M. S. (2020). Biomechanical investigation of a passive upper extremity exoskeleton for manual material handling – A computational parameter study. In *Program & Abstracts: 12th Annual Meeting of the Danish Society of Biomechanics*. (pp. 12)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

Take down policy

If you believe that this document breaches copyright please contact us at vbn@aub.aau.dk providing details, and we will remove access to the work immediately and investigate your claim.

BIOMECHANICAL INVESTIGATION OF A PASSIVE UPPER EXTREMITY EXOSKELETON FOR MANUAL MATERIAL HANDLING – A COMPUTATIONAL PARAMETER STUDY

Bo E. Seiferheld^{1*}, Jeppe Frost¹, Mathias Krog¹, Sebastian Skals^{1,2}, Michael S. Andersen³

¹Department of Health Science and Technology, Aalborg University, Denmark, ²National Research Centre for the Working Environment, Copenhagen East, Denmark, ³Department of Materials and Production, Aalborg University, Denmark.

*Student. Corresponding author: msa@mp.aau.dk

INTRODUCTION

Manual material handling (MMH) is a well-known risk factor for developing work-related musculoskeletal disorders (WMSD). Grocery work involves extensive MMH and is ranked within the top 25 occupations with the highest prevalence of WMSD with shoulder and lower back disorders accounting for approximately 40% [1]. As a solution to protect workers, passive upper-extremity exoskeletons are increasingly being used to decrease the risk of developing WMSD. However, the current literature is mostly limited to laboratory measurements. Therefore, we wanted to design a method to evaluate the biomechanical risk factors associated with using an exoskeleton based on inertial motion capture data of MMH performed in two supermarkets.

METHODS

An inertial motion capture system, Xsens Awinda (Xsens Technologies BV, Enschede, The Netherlands) sampling at 60 Hz, was used to capture full-body kinematics of 15 grocery workers who lifted a bread-case (7.9 kg) onto shopping shelves (145.5 cm). The kinematic data were used to drive a detailed human-exoskeleton model based on inverse dynamics, modelling the interaction between the human and external objects (i.e. exoskeleton, lifted object, and ground) (Figure 1). The detailed human-exoskeletal model was built in the AnyBody Modelling System v.7.2 (AnyBody Technology A/S, Aalborg, Denmark) and was based on the BVH_XSENS model template from the AnyBody Managed Model Repository v.2.3, which includes a method for predicting ground reaction forces and moments [2].

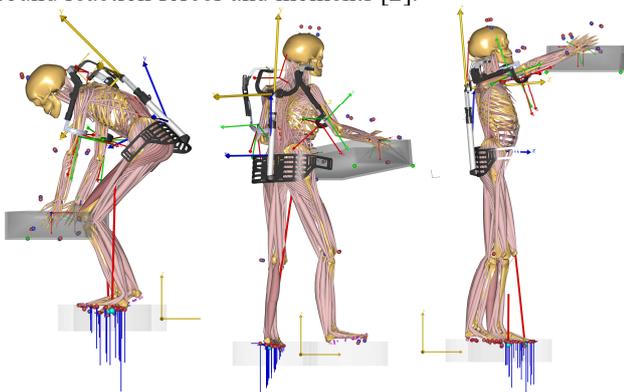


Fig. 1 The manual material task performed by the detailed human-exoskeleton model.

The exoskeleton, ShoulderX_V3 (SuitX, USA), has control settings of the support by allowing changes to the arm elevation angles at which the torque occurs and the torque amplitudes themselves [3]. Different torque profiles were used to run a computational parameter study with five different support angles (60, 75, 90, 105 and 120°) and seven different support torque levels (No: no exoskeleton, 0: no torque, 1: 5.5 Nm, 2: 6.8 Nm, 3: 8.2 Nm, 4: 9.7 Nm and 5: 11.2 Nm). Dependent measures consisted of peak and impulse

shoulder muscle force, and 3D spine and shoulder joint reaction forces. All peak forces were normalized to percentage of body weight (%BW) and impulse to %BW per second (BW·s).

RESULTS AND DISCUSSION

Simulations of various settings revealed that working with the exoskeleton could have both positive and negative effects on musculoskeletal loading. Generally, simulations with maximum torque combined with a peak angle setting between 75-105° led to the highest reductions of L4-L5 compression and anterior-posterior shear forces, glenohumeral contact forces and shoulder flexor muscle forces (Figure 2). Contrarily, in some cases, inappropriate settings with maximum torque combined with peak angle settings of 60° led to additional musculoskeletal loading compared to not wearing the exoskeleton.

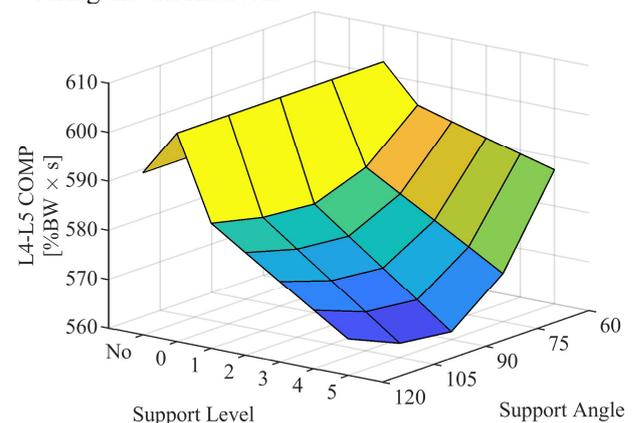


Fig. 2 L4-L5 compression impulse presented as a function of variations in the support level and support angle of the exoskeleton.

CONCLUSIONS

The passive exoskeleton appeared to be an efficient tool to potentially reduce work-related exposure during MMH. However, some support settings increased joint reaction forces, suggesting that not adjusting the exoskeleton properly could be detrimental to the protective effect of the device. Additionally, we demonstrated how musculoskeletal modelling can be a useful tool to evaluate exoskeletons during MMH based on field data.

ACKNOWLEDGEMENTS

A special thanks to SuitX for providing us with the necessary CAD model of the ShoulderX_V3 exoskeleton.

REFERENCES

1. Anton & Weeks, *International Journal of Industrial Ergonomics* **54**: 139-145, 2016.
2. Karatsidis, et al., *Medical Engineering and Physics* **65**: 68-77, 2019.
3. Van Engelhoven & Kazerooni. Wearable Robotics Association Conference, WearRAcon, 7-12, 2019.