



AALBORG UNIVERSITY
DENMARK

Aalborg Universitet

Automated shuttles and 'negotiation in motion' – A qualitative meta-synthesis of spatial interactions with human road users

Villadsen, Hannah; Lanng, Ditte Bendix; Hougaard, Ida

Published in:
Transport Policy

DOI (link to publication from Publisher):
[10.1016/j.tranpol.2023.04.007](https://doi.org/10.1016/j.tranpol.2023.04.007)

Creative Commons License
CC BY 4.0

Publication date:
2023

Document Version
Publisher's PDF, also known as Version of record

[Link to publication from Aalborg University](#)

Citation for published version (APA):

Villadsen, H., Lanng, D. B., & Hougaard, I. (2023). Automated shuttles and 'negotiation in motion' – A qualitative meta-synthesis of spatial interactions with human road users. *Transport Policy*, 137, 23-31.
<https://doi.org/10.1016/j.tranpol.2023.04.007>


General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

Take down policy

If you believe that this document breaches copyright please contact us at vbn@aub.aau.dk providing details, and we will remove access to the work immediately and investigate your claim.



Automated shuttles and ‘negotiation in motion’ – A qualitative meta-synthesis of spatial interactions with human road users

Hannah Villadsen^a, Ditte Bendix Lannig^{b,*}, Ida Hougaard^a

^a Department of People and Technology, Roskilde University, Universitetsvej 1, DK-4000, Roskilde, Denmark

^b Centre for Mobilities and Urban Studies, Aalborg University, Rendsburggade 14, DK-9000, Aalborg, Denmark

ARTICLE INFO

Keywords:

Autonomous vehicles
Shuttles
Sociotechnical
Low-car environments
Road users
Interactions

ABSTRACT

Since automated vehicles (AVs) were first introduced in public imagination, the stated goal of developers has been to develop vehicles that would eventually operate in diverse contexts like any other vehicle. To understand what this entails in real-life traffic, data regarding interactions were extracted from three separately run trials of automated shuttles in low-speed contexts with human road users in Denmark (2018–21) using a qualitative meta-synthesis approach. The underlying data consists of field observations, interviews with road users, geolocalized event registrations, video tracking data, and responses to open-ended surveys. The synthesis suggests that 1) dynamic negotiation of space and timing, 2) handling of situational and traffic system ambiguity, and 3) human road user learning, go beyond what should simply be attributed to a transitory immaturity of the technology. Road users expect other road users to engage in a deeply social negotiation of space and timing. When AVs fail to negotiate, traffic flow is interrupted, and road users express confusion and impatience, until they develop strategies to obstruct or move around the shuttles. We discuss implications on planning in low-car environments.

1. Introduction

It has generally been assumed that AVs would eventually be seamlessly included in traffic and would then make no special demands on behavior or road infrastructure at the vehicle level (Fagnant and Kockelman, 2016; Sparrow, 2017). If this assumption was to materialize, it would from a planning perspective make little sense to examine the traffic characteristics of AVs in the current phase of technology development, as the vehicles can currently only be deployed within delimited contexts and with comprehensive support systems in the form of preparatory digital mapping, the availability of suitable physical reflectors, data networks and security personnel inside or outside the vehicles (Tennant and Stilgoe, 2021). In other words, in the current state of technology AVs are highly dependent on attachments to actors and structures that create exceptions and demarcations in order for the vehicles to operate. This would need to become obsolete prior to implementation at scale in what we label a ‘same-as-any-other-vehicle’ scenario. However, a growing literature argues that AVs are better understood as a technology with characteristics and attachments that will inevitably make demands on its surrounding world (Legacy et al., 2019) and that a promise to “change the world without the world needing to

change” (Tennant and Stilgoe, 2021, p.847) is unlikely to become reality.

The current requirement to delineate operational design domains suitable for AV operation and the sliding timeline of fully autonomous mobility has gradually shifted the outlook for automated vehicles from a question of *when* to a question of *where* (Marsden, 2018; Tennant and Stilgoe, 2021). That is, from an expectation that AVs will eventually function everywhere, to an expectation that automation features will take over driving in specific operating conditions, and that fully autonomous vehicles will in the foreseeable future only be an option within delimited, digitally mapped geographical areas. Such descriptions of conditioned use invite a retelling of the narrative of road transport automation and highlights a need for knowledge about AVs’ specific dependencies and requirements regarding the behavior of other road users and the design of the physical infrastructure.

In practice, it is hardly possible to unambiguously characterize the full set of dependencies that unfold between a technology and its context in an open social system, but some factors seem to be agreed upon in the literature. Several studies indicate that from an urban planning perspective, it is preferable if self-driving cars are introduced as ride-shared or public transport, as AVs as a replacement for private cars and

* Corresponding author.

E-mail addresses: hannah@verdante.dk (H. Villadsen), dbla@create.aau.dk (D.B. Lannig).

<https://doi.org/10.1016/j.tranpol.2023.04.007>

Received 28 June 2022; Received in revised form 13 March 2023; Accepted 16 April 2023

Available online 17 April 2023

0967-070X/© 2023 The Authors. Published by Elsevier Ltd. This is an open access article under the CC BY license (<http://creativecommons.org/licenses/by/4.0/>).

low occupancy rides are likely to increase transport volume and exacerbate congestion (Soteropoulos et al., 2019) to the detriment of the environment (Grindsted et al., 2022), urban livability (Soteropoulos et al., 2021) and efficiency (ITF, 2015). Transport companies and local authorities have initiated tests of AVs resulting in publicly available and peer reviewed research (Heikoop et al., 2020). This is mirrored in the fact that available vehicles on the market for urban innovators to consider has thus far been limited to automated shuttles whereas detailed data from independent sources regarding the realized autonomous performance of other types of AVs has been hard to come by (Tennant and Stilgoe, 2021; Merat et al., 2017). Heikoop et al. (2020) point out that there is limited knowledge about interactions with other road users, just as descriptions of the specific characteristics of socio-spatial contexts are sparse.

In this paper, we draw on inductive qualitative evidence from three Danish trials to identify aspects of how automated shuttles (AS) interact with road users within specific socio-spatial contexts. By adopting a meta-synthesis approach, the paper identifies common themes in interactions across the three trials that inform a deeper understanding of phenomena and challenges specific to the interaction between low-speed ASs, human road users and spatial planning. We propose that this interpretive knowledge is valuable for assessing the potentials of automated transport in specific socio-spatial contexts, for assessing implications of technological progress, and contributes to the empirical foundation for discussions about autonomous vehicles in urban planning.

2. Research design and methods

Meta-synthesis (Walsh and Downe, 2005) is a technique to integrate results from several different but inter-related qualitative studies. The technique has an interpretive rather than an aggregating intent in contrast to meta-analysis of quantitative studies. The meta-synthesis approach was developed to facilitate better use of qualitative research findings by connecting “islands of knowledge” produced through qualitative studies (Sandelowski and Barroso, 2007).

This paper is informed by the methodological reflections outlined by Walsh and Downe (2005). They identify six steps in the process of conducting a meta-synthesis: Research framing, Search strategy, Criteria for inclusion, Appraisal of studies, Analytic technique, and Synthesis.

2.1. Research framing

While the three trials had multiple stakeholders and research goals, the objective of this meta-synthesis is to focus exclusively on spatial interactions between the ASs and the road users who encountered them. Specifically, on reports and observations of how space and timing were negotiated when AS and human road users shared the same space in different contexts.

2.2. Search strategy and criteria for inclusion of material

The relevant material was identified as reports and data prepared and collected as part of the trials. Walsh and Downe (2005) summarize a debate about whether it is advisable to combine studies which used different methodological approaches. Sandelowski et al. (1997) proposes an approach which explicitly recognizes the different methodologies prior to and during the analytic stage. A parallel discussion is that of mixing investigators. From a constructivist perspective, interpretations are constructed by a single investigator or team of investigators. A different investigator will in this line of thought construct different interpretations of a given phenomenon. Sandelowski et al. (1997) acknowledges this issue, and propose three different applicable approaches: 1) Integration of findings of one investigator’s multiple studies in a related field; 2) Synthesis of studies by different investigators in a related field; 3) Quantitative summary of key elements across

qualitative studies.

The research conducted in the three Danish trials employ different methods but has been conducted by the authors in different configurations. First author has been involved in all three trials while second and third authors have studied trial 3.

2.3. Description and appraisal of included studies

The shuttles were implemented between 2018 and 2022 in specific and varied socio-spatial contexts in Denmark (Table 1). In the three trials distinct user groups were targeted in different types of low-speed test beds and with different project owner motivations. The trials are connected by a common focus on automated busses in their early implementation and the aim to provide a knowledge foundation for the involved municipalities and transport authorities’ evaluations of automated vehicles as a way forward for sustainable public transport. As a result, the research designs applied to the three projects departure from the same inductive question: what occurs in the meeting between users, a specific socio-spatial context, and automated shuttles?

Each trial was launched, implemented and evaluated separately and with its respective teams of technicians, project managers and researchers. The projects were the first, second and fourth of their kind in Denmark, and the research aimed to document experiences in a broad and descriptive way in the absence of localized empirical and theoretical knowledge about the vehicles’ expected performance in the specific contexts. Across trials, research was rooted in a socio-technical approach, which is why both the technical deployment of the vehicles, road user experience and interactions were subjects of study.

2.3.1. Vehicle characteristics and implementation

Two different vehicle brands with some common functional characteristics were deployed. Both types of shuttles were designed for public transport and could accommodate up to 11 and 15 passengers (due to coronavirus restrictions, the allowed number of passengers in trials 2 and 3 was reduced in periods). They operated on fixed routes which had been analyzed in detail to prepare driving protocols in collaboration with safety professionals and with requirements for authority approval. The vehicles could not deviate from the preapproved route when operating in automatic mode but could be controlled manually with a joystick by a certified person (‘steward’) who was on board the vehicles during the entire operation period.




The shuttles used various sensors including 3D mapping (LiDar), camera stereovision and GPS to orientate and detect physical objects in the surroundings. If an unmapped object, e.g., a person or vehicle, was detected within the shuttle’s immediate safety zone, the vehicle would stop. This zone was programmable and adaptive to shuttle speed. The preprogrammed operation protocol included speed as well as trajectory, but unlike the trajectory, shuttle speed was adjusted autonomously based on proximity to unmapped objects. Stewards were sometimes required to reset the system after an emergency stop before autonomous operation could be resumed. They were responsible for traffic safety, daily operation, provided information and welcomed passengers onboard.

2.3.2. Data collection and dataset

Data from the three trials was collected through a combination of qualitative methods. In trial 2 and 3 data was collected in stages covering pre-implementation, initial operation and fully implemented operation. In trial 1 data was collected mid-project.

2.3.2.1. Fieldwork – In-situ observations in trial 1, 2 and 3. Across trials fieldwork amounted to a total of 23 full days of observations (Trial 1: 2 weekdays; Trial 2: 10 weekdays; Trial 3: 10 weekdays/weekend days). Additionally, >600 images were taken, and test beds were documented in terms of physical properties, traffic types/density and interactions on

Table 1
Overview of the three trials.

Project venue and duration	Project owner	Traffic context and users	Project goals	Data collection methods
Trial 1: Hospital lobby Duration May–Aug. 2018 (4 months) 	Movia – Regional transport authority, Region Seeland	<ul style="list-style-type: none"> Route: Indoor in 350 m long central lobby at hospital. Informants: Patients, visitors, hospital staff and stewards Steward on board (SAE 3) 1 Navya Arma DL4 shuttle Max 3,6 km/h 5 days/week; 7:30am-3:30pm 	Focus: Building knowledge base for future public transport: <ul style="list-style-type: none"> First experiences with AVs as public transport First operational experiences 	<ul style="list-style-type: none"> Field observations Informal travel along interviews Questionnaire survey
Trial 2: University Duration Apr.–Oct. 2021 (7 months) 	Albertslund Kommune -Municipality, Capital Region	<ul style="list-style-type: none"> Route: 3 km roadway at a university campus with mixed traffic of cars, vans, cyclists and pedestrians. Informants: Students, staff and stewards Steward on board (SAE 3) 3 EasyMile eZ10 shuttles Max 15 km/h; Avg. 5,4 km/t 5 days/week; 5.30am-7pm 	Focus: Future first-last mile solution for Copenhagen light rail: <ul style="list-style-type: none"> Study user experience and interactions with other road users. Study integrations with context aware digital support systems 	<ul style="list-style-type: none"> Field observations Informal travel along interviews Focus group interviews Geo-localized registrations of events in steward-app Questionnaire survey, user panel Video analysis
Trial 3: Suburban path Duration Mar. 2020–Nov. 2021 (21 months) 	Aalborg Kommune -Municipality	<ul style="list-style-type: none"> Route: 2.1 km redeveloped local path open to vulnerable road users, mopeds and automated shuttles. No motorized vehicles on the path pre-trial. Informants: path users and stewards. Many children and young people. Steward on board (SAE 3) 2 Navya Arma DL4 shuttles Max. 18 km/h; Avg. 8,6 km/t 7 days/week; 7am-9pm 	Focus: Urban development: <ul style="list-style-type: none"> Internal and external mobility in suburb Better urban mobility structure by upgrade of local pathway Local image boost with innovative technology 	<ul style="list-style-type: none"> Field observations Informal ethnographic interviews Focus group interviews Workshops Daily logging of events by stewards

and along the routes. Observations were recorded in the form of initial *jottings* and *fieldnotes* written in-between observations (Bernard, 2006). Observations include shuttle functionality, stewards' reactions and behavior of passengers and road users who encountered the shuttles.

2.3.2.2. In-situ informal interviews in trial 1, 2 and 3. During fieldwork informal ethnographic interviews (Bernard, 2006) were conducted with >200 informants in and around the shuttles, and documented in fieldnotes with some direct quotations of central statements. Interviewees represent a diverse group including children, elderly, cyclists, pedestrians, wheelchair-users, motorists and stewards. Interviews differ in terms of the exact questions asked (how they experience the project, shuttles, the area etc.) and duration of the interviews (between one and 10 min). The inductive nature of the research required a continuous change of focus with new findings (Hannah and Lautsch, 2011).

2.3.2.3. Further data collection specific to trial 2 and trial 3. In trial 2 an on-line user panel consisting of >500 students, staff and regular visitors was convened. Regular questionnaires included open-ended questions regarding experiences with the automated shuttles as pedestrians, cyclists, motorists and passengers. Furthermore, a mobile phone app for stewards' use was developed, allowing stewards to categorize, locate and describe notable events in real-time. Finally, based on initial findings, a central intersection was chosen as the location for one full day of video-tracking shuttles' and road users' trajectories and interactions.

In trial 3 twenty further informants were interviewed in eight semi-structured interviews, conducted as group interviews (Hammersley and Atkinson, 2007). Six group interviews were conducted outdoors as go-along interviews (Kusenbach, 2017). Also, three audio-recorded and photographed workshops were held with local school children, where children drew and explained their expectations for and experiences with the shuttles. Finally, the stewards filled in a daily log regarding technical issues, driving patterns and behavior from passengers and other road users.

2.3.3. Original data analysis

In the following a short overview of the three data analysis approaches will be given.

Trial 1: Data was analyzed focusing on predetermined themes: 1) How users interacted with the shuttles when boarding and alighting; 2) Interactions and behavior in vicinity of shuttles and in lobby; and 3) Users' and non-users' perceived safety and intention to use. Analysis of theme 1 and 2 was based on field observations, theme 3 was based on a questionnaire survey.

Trial 2: Analysis of interactions with other road users was an explicit focus of data collection and method development. Qualitative and quantitative data was used to triangulate results. Analysis was based on a coding and categorization into six predefined broad areas of interest: 1) Interactions with pedestrians; 2) Interactions with cyclists; 3) Interactions with motorists; 4) Passengers' evaluations and feedback; 5) Stewards' role, behavior and impact; and 6) Geographical distribution of challenging events and relation to route characteristics.

Trial 3: Data from interviews and fieldnotes was coded using a general inductive approach in order to explore themes generated from the raw data. Descriptive codes were assigned, e.g., "stewards' social role", "shuttle too slow", "cyclists' interaction" etc. Codes were grouped in 10 larger categories, e.g., "community of Aalborg East", "roles of stewards", "traffic interactions", which guided the final phase of data collection in 2021, where similarities or contradictions within these categories were investigated. Data from 2021 was coded separately using the same process.

2.4. Analytic technique and synthesis

For this paper, common themes related to traffic interactions were identified, through a first reading of the original research data and reports. Through a hermeneutic process of comparing and contrasting (Walsh and Downe, 2005) the findings were coded, grouped and categorized forming a new cross-case layer of traffic interaction categories (Fig. 1). The final step of the analytic process was a dialectic

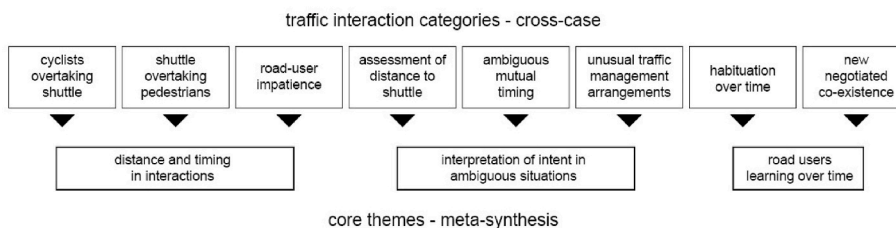


Fig. 1. Categorization and synthesis.

juxtaposition of findings to relate the three trials to each other. Through a reciprocal rereading (ibid.) of the underlying data from the original studies, the traffic interaction categories were synthesized into three overarching core themes.

In section 3 observed interactions, informants’ assessments and experiences from the three trials are presented and discussed with examples from the underlying data.

3. Findings

3.1. Distance and timing in interactions

In all three test beds, field observations recounted situations where delays and stops occurred when road users entered shuttles’ safety zone. Across contexts informants reported that they were mindful of the shuttles’ detection of their presence and experienced a need to adapt their behavior to the smooth operating distances of the shuttles. Despite this, braking and emergency braking was regularly caused by other road users in situations, that - by road users in the vicinity of the shuttle - were not perceived as posing a risk:

(Fieldnote - trial 1): “Patients queuing at the hatch near stairway 13 [where the hallway is narrow] exceed the lines marking the shuttle lane slightly. There is enough physical space for the shuttle to pass but it stops until people have moved further back. Steward uses the bell so that people discover that “they are in the way” – they don’t seem to realize why the shuttle has stopped. It stops some meters away and does not approach further.”

(Pedestrian - trial 2): “[The bus] slowed down even though I was walking on the side of the road. It was not uncomfortable for me, but it was apparently uncomfortable for the security man driving it. At least, he indicated that I should keep my distance. I thought afterwards that it is not me who has to keep my distance. Ordinary cars just bet that no one jumps out in front of them.”

(E-scooter rider - trial 3): “And then, like, when we need to pass [the bus] – because it’s going so slow - when you’re about to pass it, it just stops out of the blue.”

Challenges in timing and assessment of distance resulted in unplanned stops and delays in the flow of traffic. Fig. 2 shows a series of stills from a trial 2 video capturing a close passage resulting in multiple stops and further mutual mistiming.

Stewards in trial 1 and 2 describe such situations as problematic and try to predict, avoid, or mitigate them by interfering with the shuttles’ automated features. Multiple instances were reported of stewards manually overriding automated operation, e.g., by preventing the shuttle from leaving a bus stop when another road user approached:

(Fieldnote - Trial 3): “[The steward] stops the bus manually a couple of times to make space for cyclists and someone in an electrical wheelchair. [The steward] explains that it’s a bit easier to just halt the bus to avoid confusion and sudden braking.”

Stewards in trial 3 also note situations, where they are manually driving around slow-walking pedestrians or halting the bus:

(Steward log - trial 3): “Just before you enter the tunnel going north - if you here meet a handicap scooter, they often have to move up on

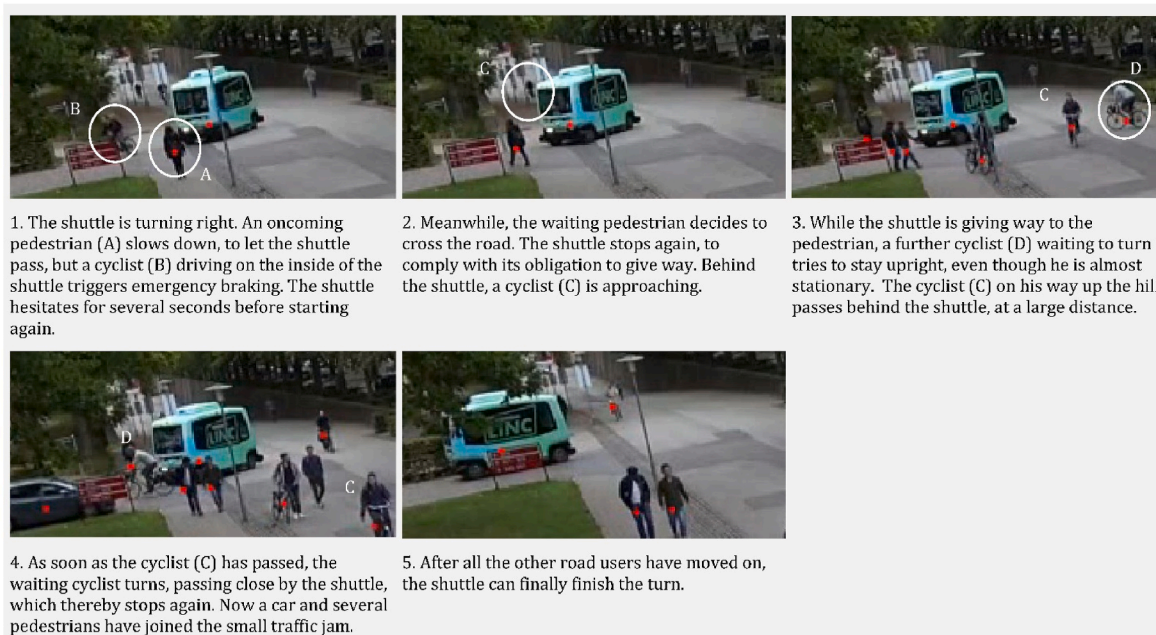


Fig. 2. Trial 2 – analysis of video: distance and timing.

the pavement to make room for the shuttle, or we have to stop the shuttle to make room.”

Anticipation of road users’ impatience was also reported to prompt stewards to interfere. This was pronounced in trial 2 where cars and other busses were at times held back by the shuttle:

Steward (trial 2): “Especially at [the stop by] Netto, there are many problems. Sometimes there are many who wait. The shuttle drives back and forth, back and forth, but just can’t find the melody. Then I sometimes switch to manual so we can get on our way. They get impatient, of course. They are friendly, they wait – and then nothing happens! We do not drive! Then they think: “What?!?” [steward gestures incredulity]”

In these instances, stewards are reported to intervene in consideration for other road users, and to make traffic run smoothly. Stewards are predicting or evaluating traffic situations from the perspective of other road users and their comfort – something the shuttles are not (yet) equipped, or programmed, to do.

3.1.1. Road users passing the shuttle

In trials 2 and 3 the shuttles were run at speeds that caused bikes and motorized traffic to overtake the shuttles. Road users point to two types of challenges when overtaking the shuttles: 1) assessment of how and when to overtake and 2) timing of when to pull into one’s own lane after passing. During fieldwork in trial 3 overtaking cyclists and scooters were observed to pull in within 3 m of the bus, causing the bus to brake instantly. This is also described by stewards and cyclists. For example:

(Steward - trial 3): “[cyclists] can be a problem when they pull in too close in front of [the bus]”

(Cyclist - trial 3): “And we’ve also gotten used to actually having to be quite far in front of the bus before we can pull in again without it stopping. And that’s more because we don’t want to bother the bus because it’ll do an emergency stop.”

Despite going in the same direction, and the cyclist portraying no obvious risk to a human observer, the shuttles respond to other road users as close-proximity obstacles. The distance required by the bus seemed unclear to other road users and some described that they keep

what they regard as a “good distance” to the shuttle, however they still experience that they make the shuttle brake. Some choose to keep extra distance as described by cyclists in trial 2:

(Cyclist – trial 2): “I just drive in a big curve around it. It’s easier as a cyclist because you ride much faster than it does.”

(Cyclist – trial 2): “It can be a little difficult sometimes to overtake it – either around it, or, if there is room, to dare to pass on the inside. You hold back more for it than for other vehicles.”

A video analysis from trial 2 (Fig. 3) shows a situation where a cyclist overtakes a shuttle and causes an emergency stop.

3.1.2. Shuttles passing pedestrians and physical obstacles

It was observed in all test beds that shuttles could not easily overtake pedestrians obstructing the shuttles’ lane, due to their predetermined trajectory. Sometimes pedestrians were not aware that the shuttle was trapped behind them, e.g., when they walked in a group on the side of the lane. Some pedestrians found this awkward:

(Pedestrian - trial 2): “Strange that it does not overtake but stays behind me.”

Depending on how fast pedestrians were moving and how flexibly the system allowed stewards to switch to manual mode, stewards either alerted the pedestrians and gesticulated to them to make room, stayed behind them at a low speed, or shifted to manual mode. Stewards would assess this based on the situation:

(Steward log - trial 3): “An old man with a [walking frame] was going very slowly. I passed him manually, so I didn’t stress him.”

(Steward - trial 2): “It rarely makes sense to shift to manual to overtake pedestrians because the switch takes time and [the shuttle] only goes 5 km/h in manual. They’ll be long gone ... I just wait for them to notice or I’ll use the horn.”

In trial 2 inaccurately parked and waiting cars frequently caused shuttles to stop prompting time-consuming shifts to manual mode and low-key conflicts with motorists. During 1.740 h of operation in trial 2, stewards reported to have switched to manual mode due to an obstacle at least 1.718 times, mainly owing to irregularly parked cars and ad hoc

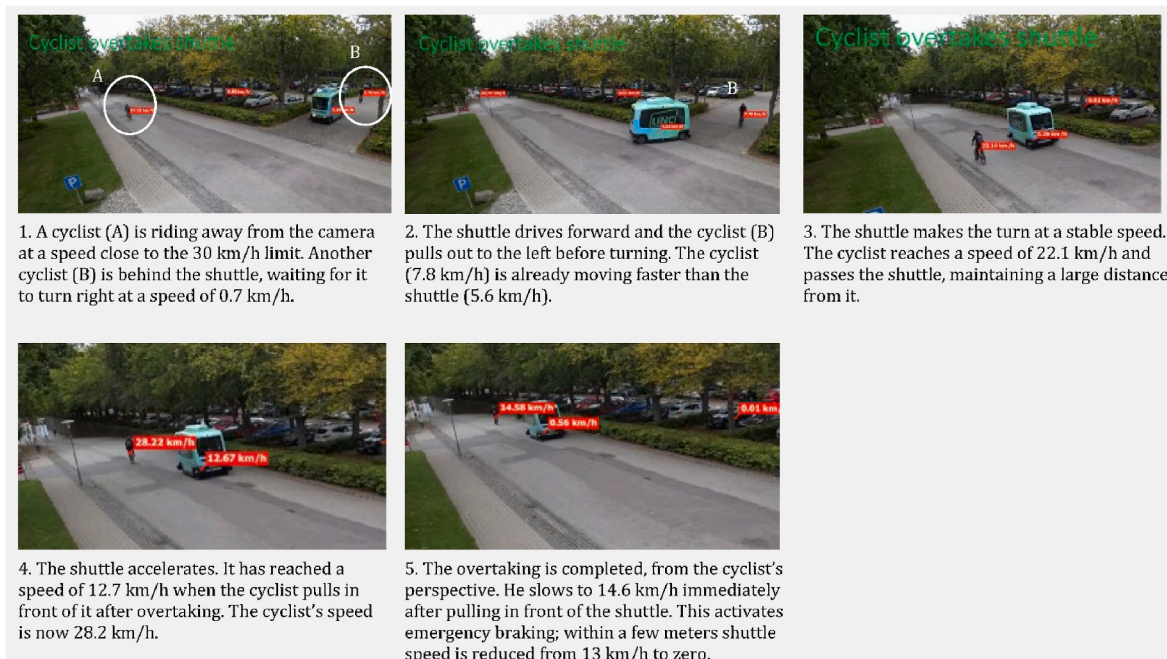


Fig. 3. Trial 2 – analysis of video: cyclist overtaking.

road works. In trial 1 the shuttle moved at walking pace with fewer situations where the shuttle had to overtake. However, in these conditions more people were observed to apparently expect the shuttle to allow closer distance to pedestrians or did not notice that they were the reason the shuttle stopped:

(Fieldnote - trial 1): “Patient in a wheelchair waiting in line. The wheelchair is positioned so that the handles enter the shuttle’s marked lane. Bus stops and steward rings the bell. Not clear if the person realizes that there is not enough space for the shuttle to pass. A passer-by steps in and the situation is resolved.”

In sum, road users who were inexperienced with the shuttles struggled to get an accurate sense of the required distance and the logic that determines it. Generally, the shuttles were perceived to be “very sensitive” or “overly sensitive” by other road users. As a result, road users regularly ended up obstructing the shuttles’ path or causing them to stop abruptly by mistake or inattention.

3.2. Interpretation of intent in ambiguous situations

Some informants describe the shuttles as exceptions to normal traffic or as something they have to deal with in an especially attentive manner:

(Cyclist - trial 3) “[...] but our children may get a bit confused, because when we’ve been out practicing their biking [skills], it’s like, “oh, the bus is coming”, and so the rules change a bit, so we need to either pass it or stay behind it.”

Recurringly, in the data the shuttles are described as difficult or unfamiliar to decode, and stewards’ logs, interviews and observations confirm situations where road users are more hesitant and seem less able to predict the shuttle’s decisions and behavior than that of conventional vehicles. Stewards in trial 3 noted in their logs during the test-period that they have been asked by other road users how they are expected to overtake the shuttles, and that road users had expressed confusion in terms of how to act in different situations.

(Steward log - trial 3): “Bicycles and scooters have a hard time figuring out if they should stop or drive past us when we exit the

tunnel while going north. So, a lot simply drive up on the path for pedestrians.”

(Steward log - trial 3): “It’s hard to figure out. Because when you overtake the bus, you pass it on the left, and that in normal traffic isn’t legal, so it causes some confusion on how to behave.”

The traffic code does allow cyclists to overtake on the right; cyclists in trial 2 and 3 overtook the shuttles both on the left and right side.

3.2.1. Effect of unusual traffic management designs

In trial 3 the route runs from north to south and back again, but bus stops are placed only on the west side of the path, meaning that when shuttles drive north in right-hand traffic, they must cross the path to dock and leave stops. This has led to uncertainty and patterns of traffic behavior from other road users that slowed down the flow of traffic. On multiple occasions cyclists were observed to overtake between the shuttle and the stop, meaning that they enter the front sensors within 3 m and the bus brakes (Fig. 4). These situations are recorded frequently:

(Cyclist - trial 3): “Let’s say that the bus is coming (heading north) and pulls in to the left side heading for the bus stop, and I approach on my bike. I can’t of course just continue into the bus, and I can’t quite go around it because there isn’t enough room because it takes up a lot of space.”

(Steward log - trial 3): “Once again nearly collided [with] a moped, [because] it was going between the shuttle and the ramp.”

In trial 2 some informants found it difficult to ascertain when the shuttles were preparing for a turn. Some describe that they experience that the shuttles signal too late:

(Motorist - trial 2): “I cannot understand why it does not start signaling until it reaches the turn. It only starts signaling when it is ready to turn. It’s annoying that you cannot see which way it will go.”

In trial 2 interactions assessed by stewards as problematic, seemed to be amplified when the normal operation of traffic was interrupted. During an unplanned road work on the shuttles’ route a temporary roadblock was set up for cars while bicycles and pedestrians could pass



The automated shuttle is driving away from the camera and turning left (yellow arrows) towards the bus stop located on the left side of the path [1]. Two cyclists are riding behind the shuttle in the same direction [2] The cyclists overtake the shuttle on the left [3]. They are now registered by the bus sensors [5] and the bus brakes [6].

Fig. 4. Trial 3 – analysis of video: cyclist overtaking.

via a narrow path on one side. The signage was provisional and ambiguous. At this location, stewards reported many problematic interactions in the days after the roadblock was put up. Other densifications of events were recorded around lunchtime at a location where students often stood in line on the road outside a food truck and at a busy bus stop, which due to road work had been moved close to the shuttles' turning area with no clear separation of road and sidewalk.

The difficulty of interpreting the shuttles' intent combined with atypical situations, where formal traffic rules do not fully describe how the individual road users should act, seemed to create particularly challenging situations. This was supported by some comments where informants described that uncertainty was linked to the complexity of traffic situations, e.g., one pedestrian in trial 2 who describe how multiple usages of an area affect the interaction:

(Pedestrian - trial 2): "Many of the uncertain experiences have taken place at the turning point on Diplomvej by Scion, as the place is also used as an entrance to the building"

Informants described that in these situations the steward may gesture intent to manage standoffs and uncertainty. Some informants explicitly commented on the general absence of a human being expressing intent:

(Pedestrian - trial 2): "What is a bit different [is that] there is no driver you can look at and read the body language. This makes it a bit unclear sometimes."

Stewards in all three trials report that road users' lack of knowledge as to what the shuttle will do, and/or how to act in its vicinity creates ambiguous situations. A steward in trial 3 notes that because of uncertainty, at times other road users will stop near the shuttle, causing the shuttle to stop, making the steward report: "So we are holding back for each other".

3.3. Repeated interactions - road users' learning over time

In all trials both informants and observations confirm that a learning process took place where road users learned to anticipate how the shuttles move and react. Informants in trial 3 explain that, despite some initial confusion, they learned how to correspond and "got used to" the bus.

(Cyclist - trial 3): "now I'm thinking that now, we just coexist somehow. We've gotten used to [the bus] being here."

(Steward - trial 3): "I also think by now people have gotten used to [the bus] being here as part of the traffic."

(Cyclist - trial 3): "[...] and then there are some [cyclists] who get really angry and swear at the bus, but I think that might be people who don't ride here very often. But you soon get used to what it does"

Stewards in trial 2 distinguished between motorists who "come here more often" and motorists whom they perceived as outsiders. Regular visitors were perceived to be more patient and offer more space for the shuttles. One steward described how contractors who often visited the campus drove less aggressively over time, so that the shuttle's safety system would not cause it to stop: "They know that once they stop us, it will take time before we are running again."

3.3.1. Effect of AS's defensive safety protocol

It has been hypothesized (Millard-Ball, 2018) that other road users would take advantage of the defensive safety protocol of AVs, once they learn that AVs will always give way when obstructed. In all trials stewards reported situations that can be interpreted as examples of this asymmetry in available strategies. Especially in situations where road users appear impatient or frustrated with the shuttles' inability to predict traffic situations and give space, or in situations where road users – predominantly young people - find it amusing to challenge the shuttles'

operation. Pedestrians were observed to cross immediately in front of the shuttle, or walking slowly in front of it despite the shuttle signaling for them to move, and some children describe that they could tease the stewards by stepping out in front of the shuttles, because they "know it will stop".

(Fieldnote – trial 3) "Young guy crosses right in front of the bus on foot, causing it to brake. On the other side he stops and nonchalantly ties his shoelace."

(Steward log – trial 3) "Had a near miss at [the] sandwich [bar]. A guy on a bike (not a kid) drove directly in front of the bus. It stopped hard and was about 20 cm from the guy. He smiled; I think it was on purpose."

(Steward log – trial 3): "Had a bicycle cross right in front of the shuttle when it was docking, and he was well aware of what he was doing. I stopped the shuttle manually."

Stewards experienced road users deliberately stepping out in front of the shuttles, and they interpreted this to signal a high degree of trust in the technology, as a display of road users' growing understanding of the shuttles' defensive programming, and in some cases as deliberate provocation. In trial 1, stewards reported that hospital staff moved around in the lobby "as if the shuttles were not there":

(Steward - trial 1): "It is especially the staff who almost rely too much on the technology, e.g., nurses who seem a little overconfident and pass quite close by. They seem to forget that people fall on their asses in here when the bus suddenly stops."

The same observation was made in the other trials regarding the behavior of some of the road users who were most experienced with the shuttles:

(Steward - trial 3): "Some of those who are really familiar with the area, they just walk out in front of it. [...] But you do feel that they are aware that it'll stop."

(Steward - trial 3): "I think it's just because they are aware that they don't need to wait for it. But that's actually pretty understandable, because people get used to how it reacts. When they realize it'll give way, then people are aware they have the right of way [...] But if it [should happen] that it doesn't work properly, we would run them down, so it's a bit ... People wouldn't just jump in front of a city bus, and that also ought to stop, you know."

The unvaried track line and limited behavioral repertoire also meant that returning road users learned to predict how to avoid disturbing the shuttles. In places where there was sufficient space, the majority of other road users tended to find ways to keep their distance and braid in and out of the shuttles' track. This type of interaction was less successful on route sections where the shuttles made turns, where many types of road actors intersected or where the allocation of space was contested due to multiple usages or less legible road design. Part of the redeveloped path in trial 3 was designed with shared space characteristics. This section had a wide paved surface in an environment with multidirectional non-car traffic. Observations indicate fewer problems with overtaking bikes in this context than on the nearby more linear section where the path width was divided into a sidewalk and a narrower separate lane for bicycles and shuttles. In trial 2 road users who had joined a user panel were given the opportunity to indicate to which extend they found that automated shuttles challenged their patience. Results indicated that the informants felt comparably more inconvenienced by the shuttles when driving a car than when walking or riding a bike. This was supported by observations of cars in trial 2, having fewer opportunities than cyclists and pedestrians to pass the shuttles fluently due to their width.

4. Concluding discussion

Difficulty to adjust distance and timing was pervasive when the ASs were introduced in the three test beds and has also been noted in other trials (Boersma et al., 2018; Brown and Laurier, 2017; Madigan et al., 2019; Rehrl and Zankl, 2018). This can be interpreted as an expression of technological immaturity but may alternatively be an indication that ASs, and possibly AVs more generally, will have a different behavior than vehicles driven by humans and exhibit other basic characteristics in interactions from the point of view of road users. The collective narrative of vehicle automation has created the expectation that AVs will be better at navigating in traffic than vehicles driven by humans (Janatabadi and Ermagun, 2022; Kacperski et al., 2021). This rests on a prevalent preconception of traffic as a system of formal rules that people sometimes break either intentionally or as an expression of their limitations in attention and computing power (Noy, 2018; Hilgarter and Granig, 2020).

However, the meta-synthesis of the three Danish trials shows a picture of traffic, which does not confirm this description. In the light of the disturbances that ASs introduced to the existing socio-spatial system in the three test beds, a picture of traffic emerges, consisting of dynamic interactions in a negotiated arena where formal traffic rules form the skeleton for a continuous adaptation of behavior and speed, based on different forms of mutual reading and signage between road users. Such an understanding of traffic can also be found described outside the AV literature (Haddington and Rauniomaa, 2014; Endsley, 2019), labelled by Jensen (2010) as “negotiation in motion”.

The ASs’ behavior is objectively predictable, but findings from the three trials indicate that ASs are at the outset perceived as unpredictable. This is particularly observed in situations where ASs are involved in interactions that presuppose a foreseeing of other actors’ behavior, i. e., interactions where the relevant behavior is informed by a partial or presumed knowledge of the other road users’ options for action and expected preferences. The inability of ASs to participate in this dynamic, and objectively less predictable, social interaction seems to make it more difficult for other road users to interact with the AS, as precisely this interactive reading, prediction and signaling characterizes the behavior that the informants exhibit and expect.

These observations highlight the analytical benefits of a conceptual distinction between an advanced sensing and handling of *spatial context*, which the vehicles largely master (within the set operating conditions), and an advanced sensing and handling of *social context*, which the vehicles in the experiments do not master. The results of this study suggest that seamless ‘same-as-any-other-vehicle’ interaction in complex negotiated traffic contexts presupposes not only a knowledge of how movement in traffic unfolds statistically, but also the ability to engage in a real-time negotiation of how, when and by whom the road space is occupied in different situations and cultural contexts.

Experience from these three trials in low-speed areas with many pedestrians shows that other road users in these design domains get used to the ASs and get to know their driving patterns, but that they do not consider them ‘same-as-any-other-vehicle’. They develop strategies for dealing with ASs, which basically seek to leave ASs alone, so that these can follow their preprogrammed protocol. This presupposes sufficient space in the road layout for other road users to walk, ride or drive around them at a certain distance (a strategy that was also recorded by Madigan et al., 2019), but ASs did not deter road users in situations with less space available. The ASs are vulnerable to other road users’ breach of the duty to give way, due to their defensive safety protocol, but generally such behavior was the exception in the trials. In most interactions, road users avoided stopping the AS, if they experienced that there was sufficient space for both the AS and other traffic to operate.

Accordingly, and in line with the literature referenced in section 1, the findings suggest that AVs are best understood as a technology with characteristics and attachments that make demands on the surrounding world. This paper reflects observations that were made at a relatively

early stage of technological development collected in specific socio-spatial contexts in the years 2018–21. The trials show how the specific attributes of the technology used in the trials produce such dependencies in the integration with existing socio-spatial patterns, and how they establish specific pressures that can either be absorbed or challenged by the social and material context.

As the technology matures insight into these early pressures provides a knowledge platform for evaluation of technological breakthroughs, as an understanding of the interplay between AVs and road users can inform assessments of locations and applications where AVs with a specific interaction profile are likely (or unlikely) to support planning goals. As the technological maturity of AVs progresses, interaction with other road users will most likely evolve too. This underlines, that to be able to guide future planning and regulation, ongoing research is needed.

According to Tennant and Stilgoe (2021), there is a reluctance among developers of AVs to develop technologies that presuppose societal change and changes to infrastructure, based on an assumption of the existing socio-technical system’s insurmountable inertia. At the same time, urban design concepts that reshape transport infrastructure to accommodate livability and sustainability have been proposed (Hamilton-Baillie, 2008; Jensen and Lanng, 2017; Eggimann, 2022) in an urban planning reorientation which opens opportunities to redefine space allocation in cities and reconsider the framework conditions for AVs and other vehicles (Brovarone et al., 2021; González-González et al., 2019). One possible line of analysis could be whether the undeviating and defensive safety protocol of ASs can fulfill specific needs and objectives of sustainable mobility and urban planning in walkable low-car environments.

Author statement

Hannah Villadsen: Conceptualization, Methodology, Formal analysis, Validation, Investigation, Data Curation, Writing - Original Draft, Writing - Review & Editing, Visualization. **Ditte Lanng:** Conceptualization, Investigation, Writing - Original Draft, Writing - Review & Editing, Visualization, Supervision, Project administration, Funding acquisition. **Ida Bruun Hougaard:** Conceptualization, Investigation, Validation, Data Curation, Writing - Original Draft, Visualization.

Data availability

Data will be made available on request.

Acknowledgements

This meta-synthesis was funded through the Interreg North Sea Region project, Art-Forum. Data collection in trial 1 resulted from cooperation between TUPPAC/LINC, regional transport authority, Movia, and Region Seeland, Denmark. Data collection in trial 2 took place as part of the Urban Innovation Action project - TUPPAC/LINC, supported by the European Union. Data collection in trial 3 took place as part of the North Sea Region project Art-Forum, in cooperation with Aalborg Kommune, Denmark. Declarations of interest: none.

References

- Bernard, H.R., 2006. *Research Methods in Anthropology Qualitative and Quantitative Approaches*, fourth ed. AltaMira Press.
- Boersma, R., Arem, B. Van, Rieck, F., 2018. Application of driverless electric automated shuttles for public transport in villages: the case of appelscha. *World Electric Vehicle Journal* 9 (1), 15. <https://doi.org/10.3390/WEVJ9010015>, 2018.
- Brovarone, A.V., Scudellari, J., Staricco, L., 2021. Planning the transition to autonomous driving: a policy pathway towards urban liveability. *Cities* 108. <https://doi.org/10.1016/j.cities.2020.102996>.
- Brown, B., Laurier, E., 2017. The trouble with autopilots: assisted and autonomous driving on the social road. In: *Conference on Human Factors in Computing Systems - Proceedings*, 2017-May, pp. 416–429. <https://doi.org/10.1145/3025453.3025462>.

- Eggimann, S., 2022. The potential of implementing superblocks for multifunctional street use in cities. *Nat. Sustain.* 5 (5), 406–414. <https://doi.org/10.1038/s41893-022-00855-2>.
- Endsley, M.R., 2019. The limits of highly autonomous vehicles: an uncertain future: commentary on Hancock (2019) Some pitfalls in the promises of automated and autonomous vehicles. *Ergonomics* 62 (4), 496–499. <https://doi.org/10.1080/00140139.2019.1563330>.
- Fagnant, D.J., Kockelman, K.M., 2016. Dynamic ride-sharing and fleet sizing for a system of shared autonomous vehicles in Austin, Texas. *Transportation* 45 (1), 143–158. <https://doi.org/10.1007/s11116-016-9729-z>.
- González-González, E., Nogués, S., Stead, D., 2019. Automated vehicles and the city of tomorrow: a backcasting approach. *Cities* 94, 153–160. <https://doi.org/10.1016/j.cities.2019.05.034>.
- Grindsted, T.S., Christensen, T.H., Freudendal-Pedersen, M., Friis, F., Hartmann-Petersen, K., 2022. The urban governance of autonomous vehicles – in love with AVs or critical sustainability risks to future mobility transitions. *Cities* 120, 103504. <https://doi.org/10.1016/j.cities.2021.103504>.
- Haddington, P., Rauniomaa, M., 2014. Interaction between road users: offering space in traffic. *Space Cult.* 17 (2), 176–190. <https://doi.org/10.1177/1206331213508498>.
- Hamilton-Baillie, B., 2008. Shared space: reconciling people, places and traffic. *Built Environ.* 34 (2), 161–181. <https://doi.org/10.2148/benv.34.2.161>.
- Hammersley, M., Atkinson, P., 2007. *Ethnography. Principles in Practice*. Routledge, p. 3.
- Hannah, D.R., Lautsch, B.A., 2011. Counting in qualitative research: why to conduct it, when to avoid it, and when to closet it. *J. Manag. Inq.* 20 (1), 14–22. <https://doi.org/10.1177/1056492610375988>.
- Heikoop, D.D., Nuñez Velasco, J., Boersma, A., Bjørnskau, T., Hagenzieker, M., 2020. Automated bus systems in Europe: a systematic review of passenger experience and road user interaction. *Advances in Transport Policy and Planning* 5.
- Hilgarter, K., Granig, P., 2020. Public perception of autonomous vehicles: a qualitative study based on interviews after riding an autonomous shuttle. *Transport. Res. F Traffic Psychol. Behav.* 72, 226–243. <https://doi.org/10.1016/j.trf.2020.05.012>.
- ITF, 2015. *Urban Mobility System Upgrade: How Shared Self-Driving Cars Could Change City Traffic*. <https://doi.org/10.1787/5jlwvzdk29g5-en>.
- Janatabadi, F., Ermagun, A., 2022. Empirical evidence of bias in public acceptance of autonomous vehicles. *Transport. Res. F Traffic Psychol. Behav.* 84, 330–347. <https://doi.org/10.1016/j.trf.2021.12.005>.
- Jensen, O.B., 2010. Negotiation in motion: unpacking a geography of mobility. *Space Cult.* 13 (4), 389–402. <https://doi.org/10.1177/1206331210374149>.
- Jensen, O.B., Lannig, D.B., 2017. *Mobilities Design: Urban Designs for Mobile Situations*. Routledge, London.
- Kacperski, C., Kutzner, F., Vogel, T., 2021. Consequences of autonomous vehicles: ambivalent expectations and their impact on acceptance. *Transport. Res. F Traffic Psychol. Behav.* 81, 282–294. <https://doi.org/10.1016/j.trf.2021.06.004>.
- Kusenbach, M., 2017. Go-alongs. In: Flick, U. (Ed.), *The SAGE Handbook of Qualitative Data Collection*. Sage Publications, pp. 344–361.
- Legacy, C., Ashmore, D., Scheurer, J., Stone, J., Curtis, C., 2019. Planning the driverless city. *Transport Rev.* 39 (1), 84–102. <https://doi.org/10.1080/01441647.2018.1466835>.
- Madigan, R., Nordhoff, S., Fox, C., Ezzati Amini, R., Louw, T., Wilbrink, M., Schieben, A., Merat, N., 2019. Understanding interactions between Automated Road Transport Systems and other road users: a video analysis. *Transport. Res. F Traffic Psychol. Behav.* 66, 196–213. <https://doi.org/10.1016/J.TRF.2019.09.006>.
- Merat, N., Madigan, R., Nordhoff, S., 2017. Human factors, user requirements, and user acceptance of ride-sharing in automated vehicles. In: *International Transport Forum Discussion Papers 2017/10*. OECD Publishing.
- Marsden, G., 2018. Planning for autonomous vehicles? Questions of purpose, place and pace. *Plann. Theor. Pract.* 19 (5), 771–773. <https://doi.org/10.1080/14649357.2018.1537599>.
- Millard-Ball, A., 2018. Pedestrians, autonomous vehicles, and cities. *J. Plann. Educ. Res.* 38 (1), 6–12. <https://doi.org/10.1177/0739456X16675674>.
- Noy, I.Y., Shinar, D., Horrey, W.J., 2018. Automated driving: safety blind spots. *Saf. Sci.* 102, 68–78. <https://doi.org/10.1016/j.ssci.2017.07.018>.
- Rehrl, K., Zankl, C., 2018. Digibus©: results from the first self-driving shuttle trial on a public road in Austria. *European Transport Research Review* 10 (2). <https://doi.org/10.1186/s12544-018-0326-4>.
- Sandelowski, M., Barroso, J., 2007. *Handbook for Synthesizing Qualitative Research*. Springer Pub. Co.
- Sandelowski, M., Docherty, S., Emden, C., 1997. Qualitative metasynthesis: issues and techniques. *Res. Nurs. Health* 20, 365–371. [https://doi.org/10.1002/\(SICI\)1098-240X\(199708\)20:4<365::AID-NUR9>3.0.CO;2-E](https://doi.org/10.1002/(SICI)1098-240X(199708)20:4<365::AID-NUR9>3.0.CO;2-E).
- Soteropoulos, A., Berger, M., Ciari, F., 2019. Impacts of automated vehicles on travel behaviour and land use: an international review of modelling studies. *Transport Rev.* 39 (1), 29–49. <https://doi.org/10.1080/01441647.2018.1523253>.
- Soteropoulos, A., Berger, M., Mitteregger, M., 2021. Compatibility of automated vehicles in street spaces: considerations for a sustainable implementation. *Sustainability* 13 (5), 2732. <https://doi.org/10.3390/su13052732>.
- Sparrow, R., Howard, M., 2017. When human beings are like drunk robots: driverless vehicles, ethics, and the future of transport. *Transport. Res. C Emerg. Technol.* 80, 206–215. <https://doi.org/10.1016/j.trc.2017.04.014>.
- Tennant, C., Stilgoe, J., 2021. The attachments of “autonomous” vehicles. *Soc. Stud. Sci.* 51 (6), 846–870. <https://doi.org/10.1177/03063127211038752>.
- Walsh, D., Downe, S., 2005. Meta-synthesis method for qualitative research: a literature review. *J. Adv. Nurs.* 50 (2), 204–211. <https://doi.org/10.1111/j.1365-2648.2005.03380.x>.