



AALBORG UNIVERSITY
DENMARK

Aalborg Universitet

Spontaneous emission from active dielectric microstructures

Søndergaard, Thomas; Tromborg, Bjarne

Published in:

Quantum Electronics Conference, 2000. Conference Digest. 2000 International

DOI (link to publication from Publisher):

[10.1109/IQEC.2000.908170](https://doi.org/10.1109/IQEC.2000.908170)

Publication date:

2000

Document Version

Publisher's PDF, also known as Version of record

[Link to publication from Aalborg University](#)

Citation for published version (APA):

Søndergaard, T., & Tromborg, B. (2000). Spontaneous emission from active dielectric microstructures. In *Quantum Electronics Conference, 2000. Conference Digest. 2000 International*
<https://doi.org/10.1109/IQEC.2000.908170>

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

Take down policy

If you believe that this document breaches copyright please contact us at vbn@aub.aau.dk providing details, and we will remove access to the work immediately and investigate your claim.

09.15 QFC4

Variable coherence in determining the scattering parameters of diffuse media using laser speckle

K.J. Webb, M.A. Webster, J.D. McKinney, and A.M. Weiner
 School of Electrical and Computer Engineering, Purdue University, West
 Lafayette, Indiana 47907-1303, USA
 Ph: 1-765-434-3373 (webb), Fax: 1-765-494-9708, webb@ecn.purdue.edu

We demonstrate the application of a variable-coherence laser source for determining the scattering parameters of a diffuse medium and the potential for imaging spatially-dependent scatter. A key concept in this work is the ability to synthesize a variable-coherence source by frequency modulating a tunable laser diode (with a center wavelength of 850 nm) at a rate much faster than the integration time of the detector. This allows for a rapid measurement and the adaption of laser coherence to the degree of scatter, which we show is critical in obtaining the necessary sensitivity.

The speckle intensity statistics are described by the contrast ratio, which we have previously shown can be used to extract material parameters using light of fixed coherence by varying the material thickness [1]. The experiments used commercially available white acrylics (with the scattering due to ~50 nm TiO₂ particles suspended in the acrylic background) as the diffuse medium in a transmission geometry. The speckle contrast ratio dependence upon the source linewidth was measured, with the results shown in Fig. 1. The theoretical fits were obtained using an approximate Green's function for the diffusion equation.

To demonstrate sensitivity of the speckle contrast ratio to scattering variations, we have performed a number of experiments to collect imaging-type data [2]. This data shows a spatially-varying contrast ratio which can be used to reconstruct photon transit time distributions. In the images of Fig. 2, the difference of contrast ratio between the inhomogeneous and homogeneous cases is shown. Lighter shades represent a higher contrast ratio than in the homogeneous case, and darker shades represent a lower contrast ratio. In Fig. 2(b) one can see a region of higher contrast ratio corresponding to the localized reduction of scattering introduced by a void. Conversely, in Fig. 2(d), one can see a region of lower contrast ratio due to the localized increase in scattering caused by a white acrylic inhomogeneity. No localization of the inhomogeneity is observed for the 5 MHz linewidth used in Figs. 2(a) and 2(c), demonstrating the importance of the source coherence.




Fig. 1. Contrast ratio data as a function of laser linewidth for two different acrylics. The symbols are experimental data, and the dashed lines are theoretical fits. The top and bottom curves are for the heavily scattering acrylic with $\mu_s = 12.5 \text{ cm}^{-1}$. The middle curve is for the less scattering acrylic with $\mu_s = 6 \text{ cm}^{-1}$. The slab thickness is d .

References

- C. A. Thompson, K. J. Webb, and A. M. Weiner, "Diffusive media characterization using laser speckle", *Appl Opt*, **36**, 3726-3734 (1997).
- J. D. McKinney, M. A. Webster, K. J. Webb, and A. M. Weiner, "Characterization and imaging in optically scattering media by use of laser speckle and a variable-coherence source", *Opt. Lett.*, **25**, 4-6 (2000)

09.30 QFC5

Spontaneous emission from active dielectric microstructures.

Thomas Søndergaard and Bjarne Tromborg

Research Center COM, Technical University of Denmark, Building 349, DK-2800 Kgs. Lyngby, Denmark, Telephone: +45 45 25 37 89, Fax: +45 45 93 65 81, E-mail: ts@com.dtu.dk

Spontaneous emission is one of the key factors that determine the noise properties of photonic devices and the pump power threshold of lasers. The spontaneous emission in dielectric microstructures (micro-cavities, photonic crystals, optical waveguides, etc.) can to some extent be controlled and engineered due to the dependence of the emission rate on the location and polarisation of the emitters in the structure [1,2]. This paper addresses the methods of quantum electrodynamics of dielectric media which enable calculation of the local rate of spontaneous emission in active microstructures.

For passive structures the spontaneous emission may be derived by expanding the radiation field in power-orthogonal modes normalized to one quantum of energy, and using the Fermi Golden Rule. This approach was used in [1] for calculating the position dependence of spontaneous emission in passive photonic crystals. However, for active materials the mode concept is problematic, and it is more convenient to express observable quantities in terms of the field operators and generating currents. The total rate of spontaneous emission is given by

$$\Gamma = \frac{2\mu_0}{h} \text{Im} \left(\int \langle \hat{j}^*(\vec{r}') \cdot \hat{G}(\vec{r}', \vec{r}') \cdot \hat{j}(\vec{r}') \rangle d^3r' d^3r'' \right) \quad (1)$$

where $\hat{j}(\vec{r})$ is the generating current, and $\hat{G}(\vec{r}', \vec{r}'')$ is the classical transverse Green's tensor that determines the electric field in terms of the transverse current. For materials with gain the tensor can be derived from the solutions to the homogeneous wave equation and the adjoint wave equation.

As an example we show in Figure 1, in polar coordinates, the distribution of spontaneous emission going into radiation modes from an active optical fiber. The distributions are shown for the emitter in the center of the fiber core and at the edge of the fiber core, respectively. The optical fiber has the core refractive index 1.45, cladding refractive index 1.43, core radius 2 μm . The emission wavelength is 1508 nm. The emission rate Γ_r is for dipoles with orientation along the fiber axis, Γ_\perp is the sum of emission rates for dipoles with orientation perpendicular to the fiber axis, and Γ_{tot} is the sum of these two emission rates.

The presentation will include an analysis of the effects of gain on the radiation pattern and the ratio of radiation into the guided mode(s) for active optical fibers.

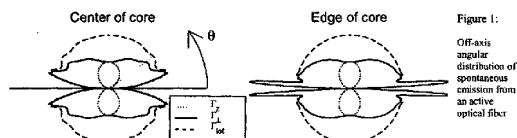


Figure 1:

Off-axis angular distribution of spontaneous emission from an active optical fiber

[1] T. Søndergaard, "Spontaneous emission in two-dimensional photonic crystal microcavities", to appear in *IEEE Journal of Quantum Electronics* April 2000

[2] S.M. Barnett, B. Futtner, R. Loudon and R. Matloob, "Decay of excited atoms in absorbing dielectrics", *J Phys. B: At Mol. Opt. Phys.*, vol. 29, pp. 3763-3781, 1996.