

New Formula for Stability of Cube Armoured Roundheads

Maciñeira, Enrique; Burcharth, Hans F.

Published in:
Coastal Structures 2007

Publication date:
2007

Document Version
Publisher's PDF, also known as Version of record

[Link to publication from Aalborg University](#)

Citation for published version (APA):
Maciñeira, E., & Burcharth, H. F. (2007). New Formula for Stability of Cube Armoured Roundheads. In L. Franco, P. Ruol, G. R. Tomasicchio, & A. Lamberti (Eds.), *Coastal Structures 2007 : Book of Abstracts : International Conference 2-4 July, Venice, Italy* (pp. 36). American Society of Civil Engineers.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

Take down policy

If you believe that this document breaches copyright please contact us at vbn@aub.aau.dk providing details, and we will remove access to the work immediately and investigate your claim.

NEW FORMULA FOR STABILITY OF CUBE ARMoured ROUNDHEADS

Enrique Maciñeira, Port Authority of La Coruña, University of la Coruña, Spain, emacine@puertocoruna.com
Hans F. Burcharth, Aalborg University, Denmark, Burcharth@civil.auc.dk

INTRODUCTION

Design of armour for rubble mound breakwater roundheads constitutes in many cases a problem due to the limitation of available data and guidelines. The objective of the paper is to present the results of a comprehensive model test study on the stability of cube armoured roundheads, resulting in a new stability formula.

MODEL TESTS

Port of La Coruña commissioned in the period 2002 to 2004 the Hydraulics and Coastal Engineering Laboratory of Department of Civil Engineering, Aalborg University, Denmark, to perform physical model tests of the stability of the cube armoured roundhead for the new port at Punta Langosteira, Spain. The tests, which were performed in a basin with multidirectional wave generators, included a parametric study of the influence of slope, radius and the mass density of the cubes as well as wave characteristics including angle of incidence.

STABILITY FORMULA

Analyses of the test results made it possible to develop the following stability formula:

$$\frac{H_s}{\Delta \cdot D_n} = 0,57 \cdot e^{0,07 \cdot R_n} \cdot \cot^{0,71} \alpha \cdot D^{0,2} \cdot s_{op}^{0,4} + 2,08 \cdot s_{op}^{0,14} - 0,17$$

Definitions and parameter ranges are given in Table 1.

Table 1. Definitions and validity ranges of parameters.

Parameter	Min	Max
D_n , cube side length	40mm	40mm
$\Delta = \rho_s / \rho_w - 1$	1.4	1.8
ρ_s , cube mass density	2.40t/m ³	2.80t/m ³
ρ_w , water mass density	1.00t/m ³	1.00t/m ³
R_n , head diameter at SWL over D_n	11.75	19.25
$\cot \alpha$, slope	1.5	2.0
S_{op} , wave steepness	0.02	0.06
D , relative number of displaced cubes in active zone	no damage	failure

Figure 1 shows the fitting of the laboratory data to the formula for given damage levels.

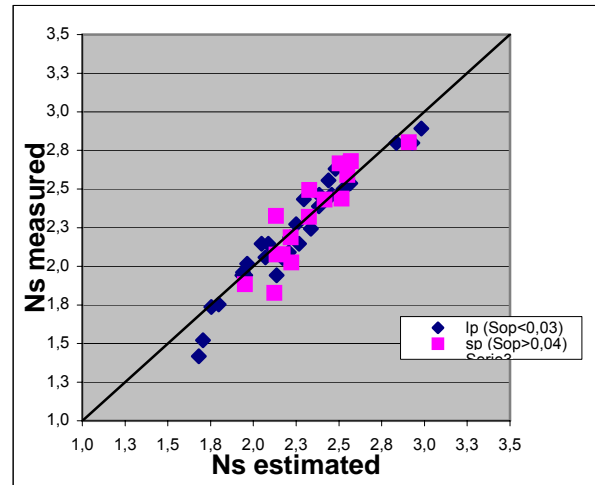


Fig.1. Fitting of laboratory data to the formula for given damage levels.

The paper provides further recommendations for head design.

REFERENCES:

- Burcharth, H.F., Haagenzen, P, Maciñeira, E., 2003, Stability of roundheads armoured with cubes, Coastal Structures'03
- Burcharth, H.F., 2004, Parametric study of the round head for the new port of La Coruña at Punta Langosteira, Hydraulic and Coastal Engineering Laboratory, Aalborg University, Denmark
- Burcharth, H.F., 2003 Report on model testing of rubble mound roundhead solutions (new port of La Coruña at Punta Langosteira), Hydraulic and Coastal Engineering Laboratory, Aalborg University, Denmark