

Equal annoyance contours for infrasonic frequencies

Møller, Henrik

Published in:

Proceedings of 4th Congress of the Federation of Acoustical Societies of Europe, FASE '84, Sandefjord, August 21-24, 1984

Publication date:

1984

[Link to publication from Aalborg University](#)

Citation for published version (APA):

Møller, H. (1984). Equal annoyance contours for infrasonic frequencies. In *Proceedings of 4th Congress of the Federation of Acoustical Societies of Europe, FASE '84, Sandefjord, August 21-24, 1984* (pp. 369-372)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

Take down policy

If you believe that this document breaches copyright please contact us at vbn@aub.aau.dk providing details, and we will remove access to the work immediately and investigate your claim.

EQUAL ANNOYANCE CONTOURS FOR INFRASONIC FREQUENCIES

Henrik Møller

Institute of Electronic Systems
Aalborg University
Strandvejen 19, DK-9000 Aalborg
Denmark

INTRODUCTION

Infrasound, at pressure levels that can be heard, is quite common in our daily surroundings, and may cause considerable annoyance. A few countries have introduced measurement procedures and hygienic limits, but there has been a deplorable lack of experimental facts on which to base these.

For audiosound the agreement between annoyance and loudness is usually so good that dB(A) and similar measures developed from loudness investigations can be used as an estimate of the annoyance effect. It might therefore seem a possibility to use the equal loudness curves already described for the infrasound region (1, 2, 3) as a base for an extension downward of existing weighting curves. However, the close relation between annoyance and loudness found at higher frequencies may not exist in the infrasound region, because very low frequencies are perceived as a throbbing sound instead of a tone, and this may have an influence on the annoyance experience.

The aim of the present project has been to establish equal annoyance contours in the frequency range 4-31.5 Hz.

METHOD

Subjects

Eighteen students participated (15 men and 3 women; age range: 20-25). All were paid volunteers, and all were familiar with infrasound stimuli from their participation in our work on equal loudness curves for the infrasonic range. An audiometric test ensured normal hearing.

Sound conditions

The following 18 sound exposure conditions were used: 4 Hz at 120 and 124 dB; 8 Hz at 109, 114, 119 and 124 dB; 16 Hz at 95, 102, 109 and 116 dB; 31.5 Hz at 75, 84, 93 and 102 dB; 1 kHz octave filtered pink noise at 20, 40, 60 and 80 dB.



FASE 84

Henrik Møller

8-i

Annoyance of infrasound

Apparatus

The experiments were performed in a 16 cubic metre pressure chamber. The infrasound was emitted via 16 electrodynamic loudspeakers driven by a B & K 2712 power amplifier. The 1000 Hz noise was emitted via an equalized Hi-Fi sound reproduction system with the loudspeaker placed 140 cm from the subject. An HP 21MX computer controlled the experiments.

Experimental design

The design was an 18 x 18 latin square that balanced both order and carry-over effects. Each subject was exposed to only one stimulus a day for 18 days and at the same hour every day.

Procedure

A session lasted 20 minutes. During this period the subject was alone in the test chamber. He was supplied with two newspapers and instructed to read till the end of the session. After 5 minutes of silence the sound stimulus was presented for 15 minutes. After the exposure the subject indicated on a scale the degree of annoyance that he would probably feel, if his neighbour produced the same type of sound for two hours. The scale was a 150 mm long horizontal line, the ends of which were labelled respectively "not at all annoying" and "very annoying".

RESULTS

Degree of annoyance was measured in mm, and means for each of the 18 stimuli were calculated. The relationship between sound pressure level and mean annoyance rating is linear for the infrasonic frequencies (coefficients of correlation higher than 0.99). The means are presented graphically in Figure 1 together with the regression lines for the infrasonic frequencies.

A horizontal line drawn from a 1000 Hz point in Figure 1 will intersect the regression lines at sound pressure levels where the respective infrasonic frequency causes the same annoyance rating as the 1000 Hz noise. Lines were drawn from each of the four 1000 Hz points and the equal annoyance contours in Figure 2 were obtained.

The equal annoyance curves demonstrate the not very surprising fact that the lower the frequency the greater the sound pressure must be to cause a given amount of annoyance. Compared with 1000 Hz the curves lie much closer in the infrasonic range. This change is already seen at 31.5 Hz, but becomes even more pronounced with decreasing frequency.

DISCUSSION

The closeness of the curves in the infrasonic region implies

that relatively small changes in sound pressure may cause large changes in annoyance. From an environmental point of view this is important because a modest reduction in sound pressure will in some cases be enough to alleviate annoyance caused by infrasonic noise. It also means that accuracy is crucial when measuring infrasound and that specific demands must be made on the measuring equipment.

Several investigations have shown that dB(A) measures are unsatisfactory for the assessment of annoyance from sounds containing a considerable amount of low frequency energy. The disagreement between dB(A) values and ratings of annoyance has often been interpreted as a difference between the experience of loudness and the experience of annoyance. However, the present equal annoyance curves are remarkably similar to the equal loudness curves (2, 3) and the relation between loudness and annoyance seems to hold for low and infrasonic frequencies too.

Both the equal annoyance and the equal loudness curves have slopes close to 12 dB per octave and this slope is recommended for a possible weighting curve for infrasound.

PROJECTED EXPERIMENTS

Ongoing and future experiments deal with annoyance from non-sinusoidal infrasonic noise and combinations of audio and infrasonic noise. The significance of the exposure time is also investigated.

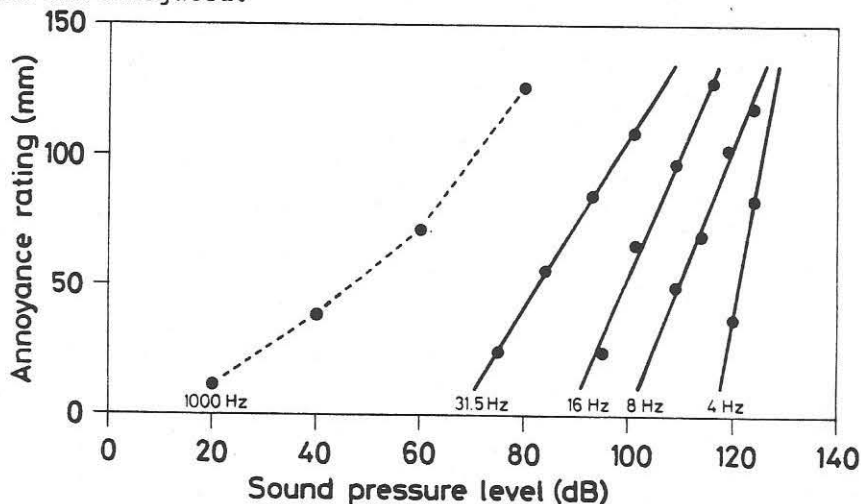


Figure 1. Relation between sound pressure level and annoyance rating. The filled circles represent the means for each stimulus, and the lines are regression lines for each infrasonic frequency.



FASE 84

Henrik Møller

8-i

Annoyance of infrasound

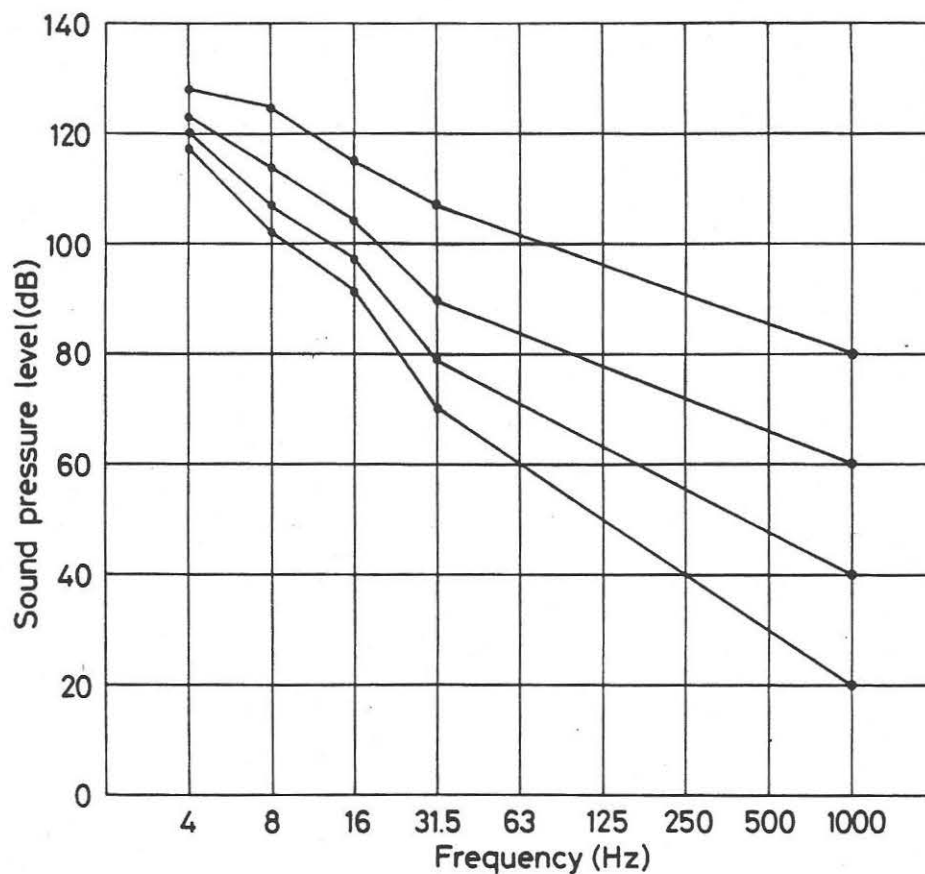


Figure 2. Equal annoyance contours.

REFERENCES

1. L. D. Whittle, S. J. Collins and D. W. Robinson: The audibility of low frequency sounds. *Journal of Sound and Vibration*, vol. 21, no. 4, 431-448, 1972.
2. Henrik Møller, Jente Andresen: Loudness of infrasound. *Proceedings of Internoise 83*, Edinburgh, 13-15 July, 815-818, 1983.
3. Henrik Møller, Jente Andresen: Loudness of pure tones at low and infrasonic frequencies. Submitted for publication in *Journal of Low Frequency Noise and Vibration*.