

Improving the Performance of an Air-Cooled Fuel Cell Stack by a Turbulence Inducing Grid

Pløge, Line Justesen ; Fallah, Rasheed; Al Shakhshir, Saher; Berning, Torsten; Gao, Xin

Creative Commons License
Other

Publication date:
2018

[Link to publication from Aalborg University](#)

Citation for published version (APA):

Pløge, L. J., Fallah, R., Al Shakhshir, S., Berning, T., & Gao, X. (2018). *Improving the Performance of an Air-Cooled Fuel Cell Stack by a Turbulence Inducing Grid*. 1. Poster presented at ECS and SMEQ Joint International Meeting, Cancun, Mexico.

General rights


Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

Take down policy



If you believe that this document breaches copyright please contact us at vbn@aub.aau.dk providing details, and we will remove access to the work immediately and investigate your claim.

- Air-cooled proton exchange membrane fuel cells (ACPEMFC's) are gaining more popularity due to their :
 - Simplicity (run on dry H₂), and
 - Quick start-up.
- ACPEMFC's are commercialized and designed for applications in the range of up to few kW's such as telecom-backup systems and portable power.
- The stoichiometric ratios at the supplied Air into the cathode open channel is typically 40-60, because it is used for cooling the stack besides providing O₂ for the reaction,
- while at the supplied dry H₂ into anode channels it should be as low as possible to not waste hydrogen.
- One of the main drawbacks of ACPEMFC's is the relatively low maximum current density around 0.4 A/cm².
- It is highly desirable to operate at higher current densities and thereby increase the power density.
- This might be achieved by more efficient cooling.
- Thus, Turbulence grids are utilized to increase the mixing effect and thereby enhance the heat transfer in the cathode channels.
- In this work, the effect of the turbulence grid is demonstrated experimentally and numerically using CFD.

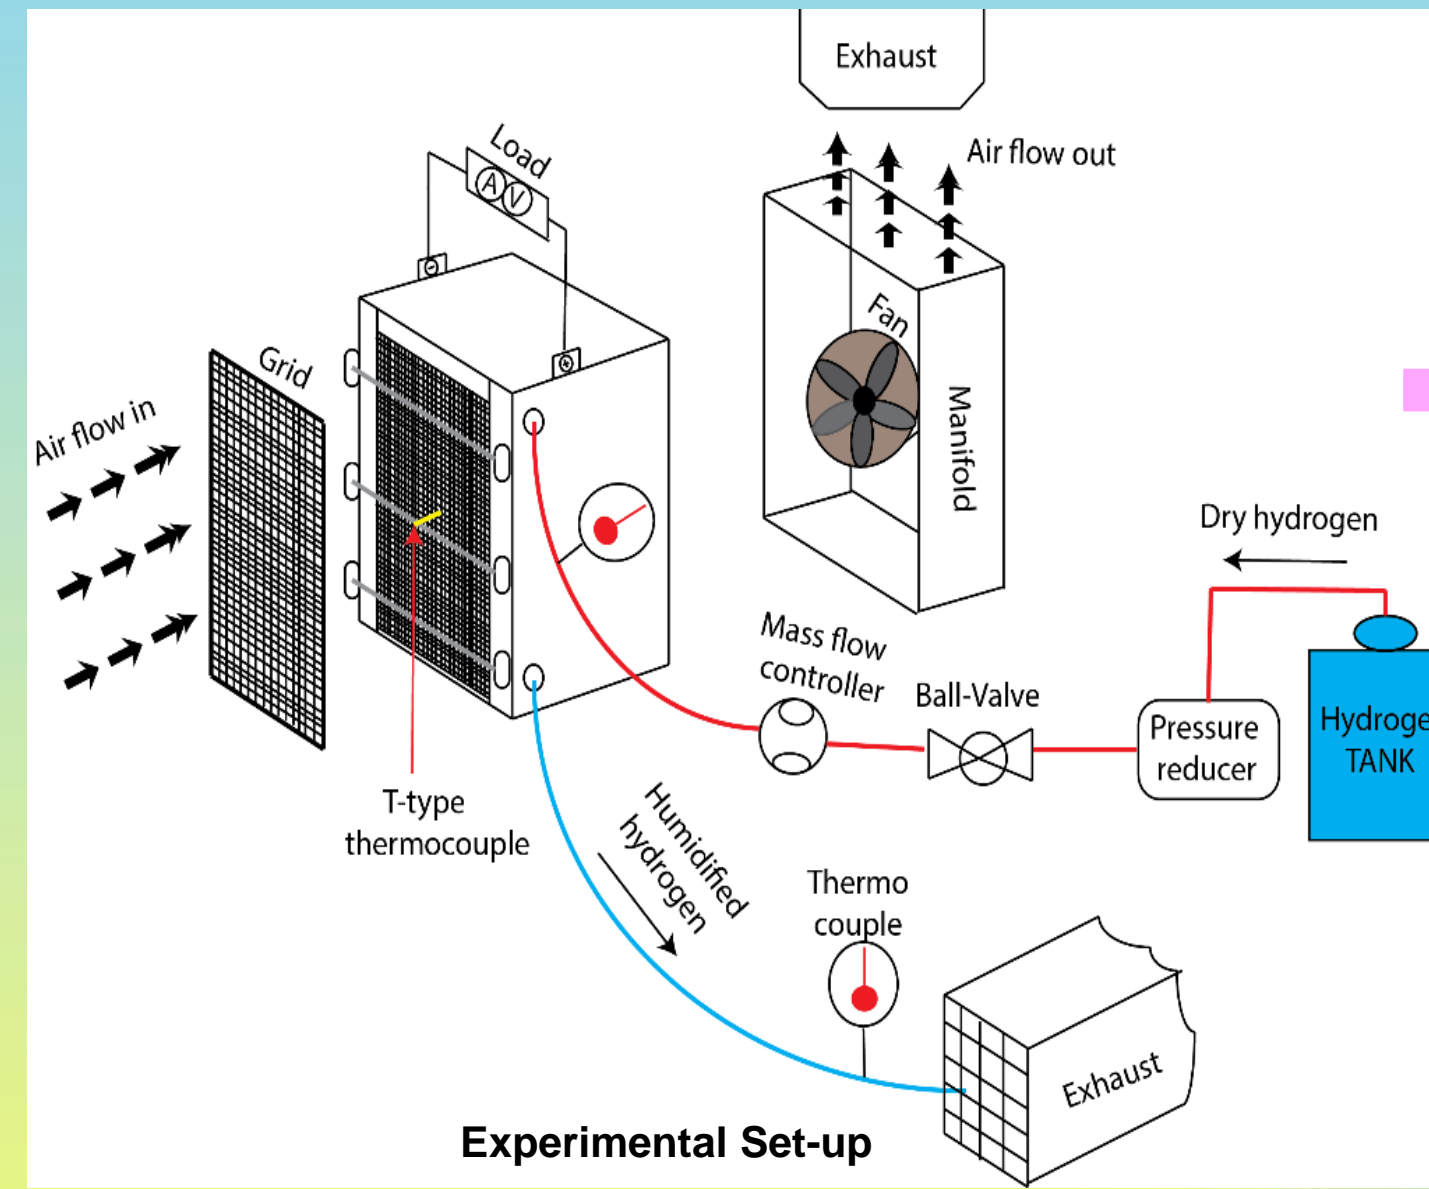


Dimensions of the honeycomb and square turbulence grid


Parameter	Dimensions Square Grid	Dimensions Honeycomb Grid	Unit
Grid pore size, P	1	1	[mm]
Grid rip width, S	0.6	0.6	[mm]
Grid thickness, D	1	1	[mm]
Grid fill factor, f	0.605	0.613	[-]
Grid pore angle, α	45	90	°C

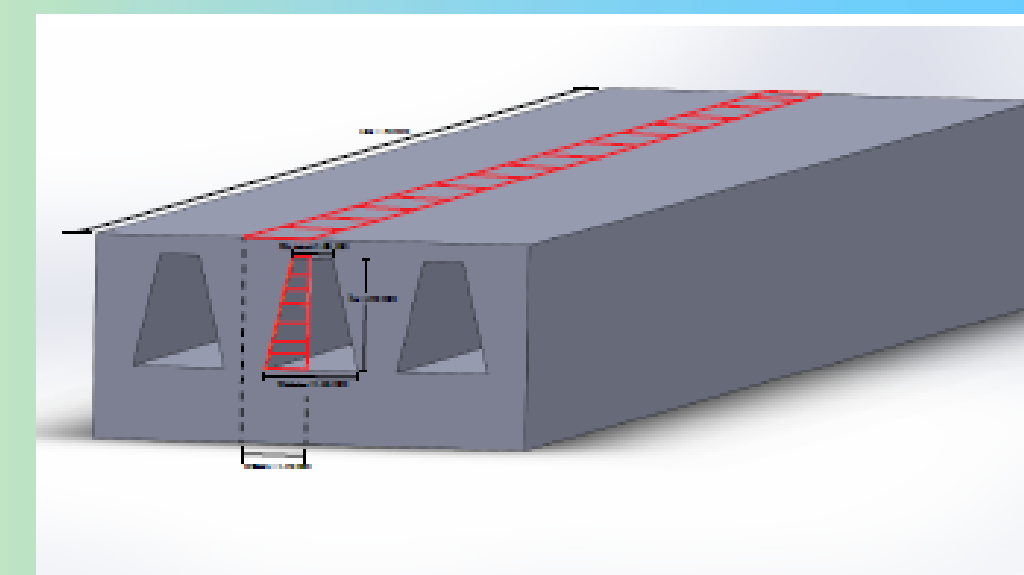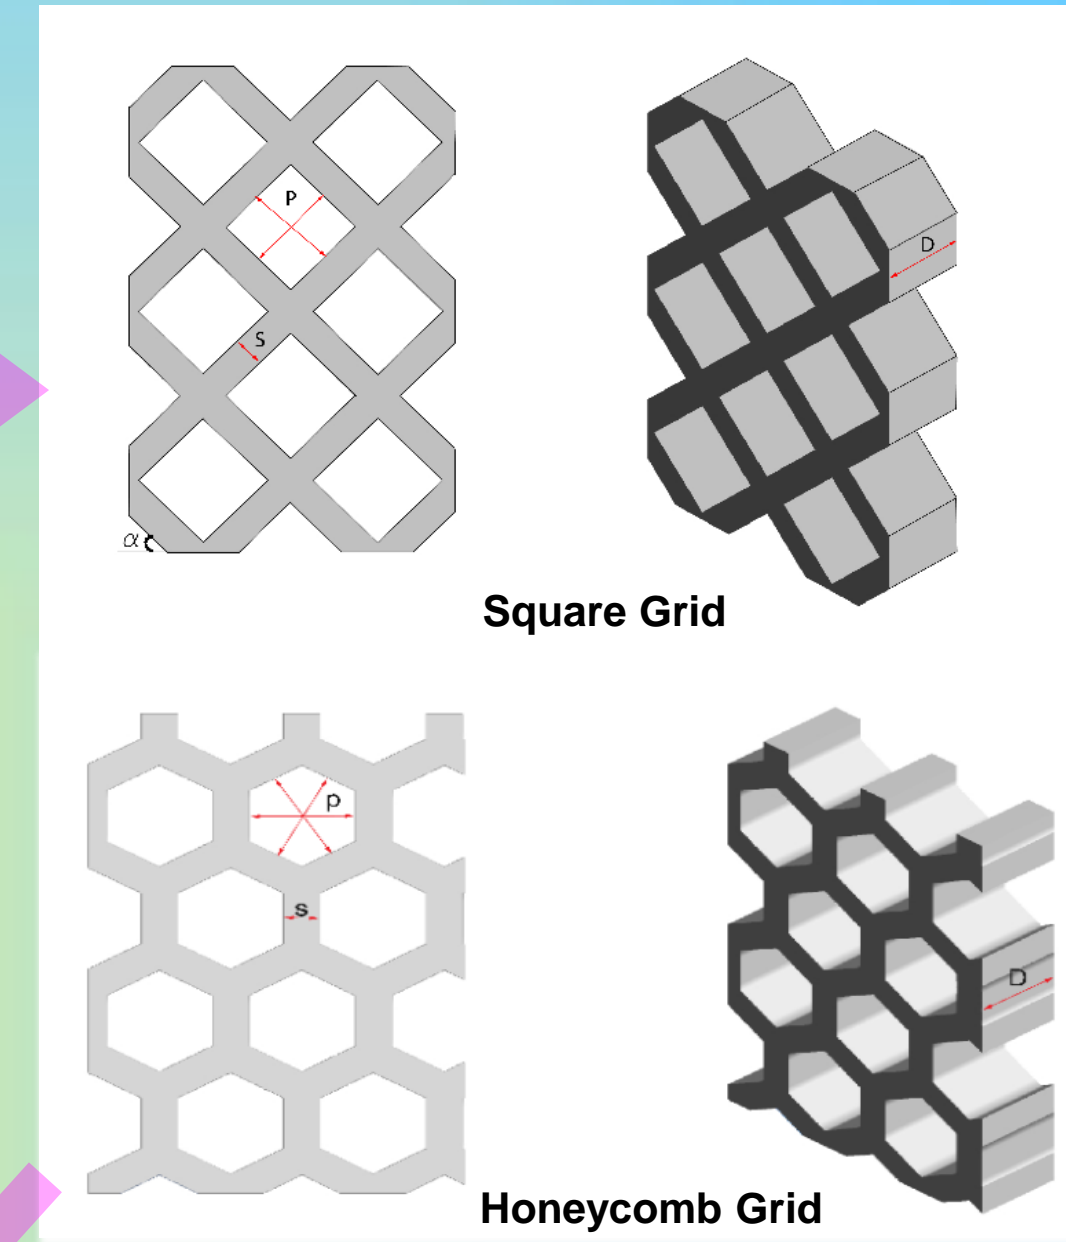


Sketch of the half channel cross sectional area and half the geometrical area of the membrane included in the computational domain

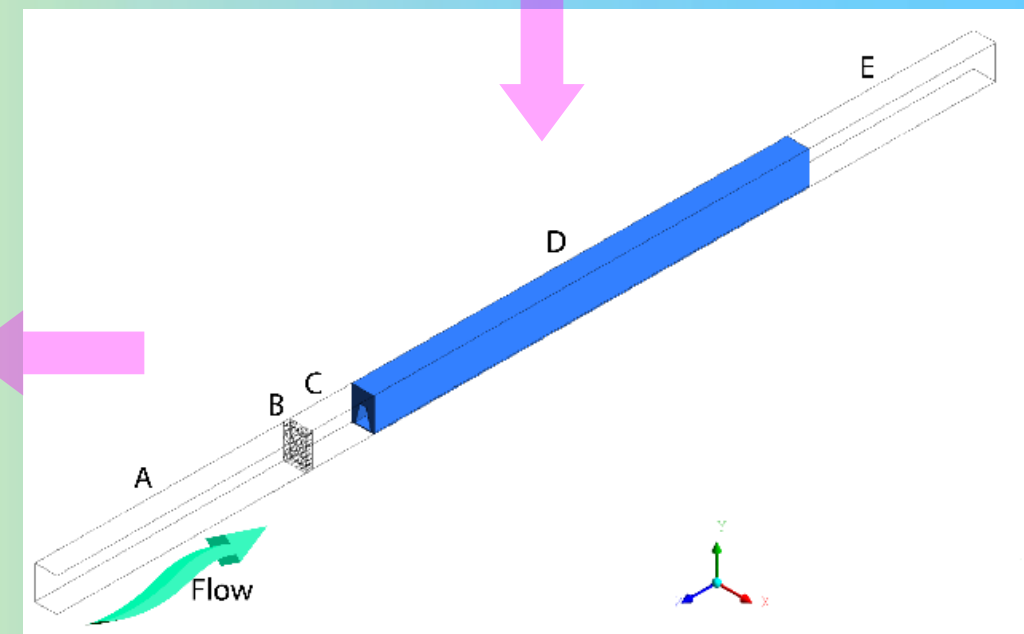


Computational domain used in simulations.

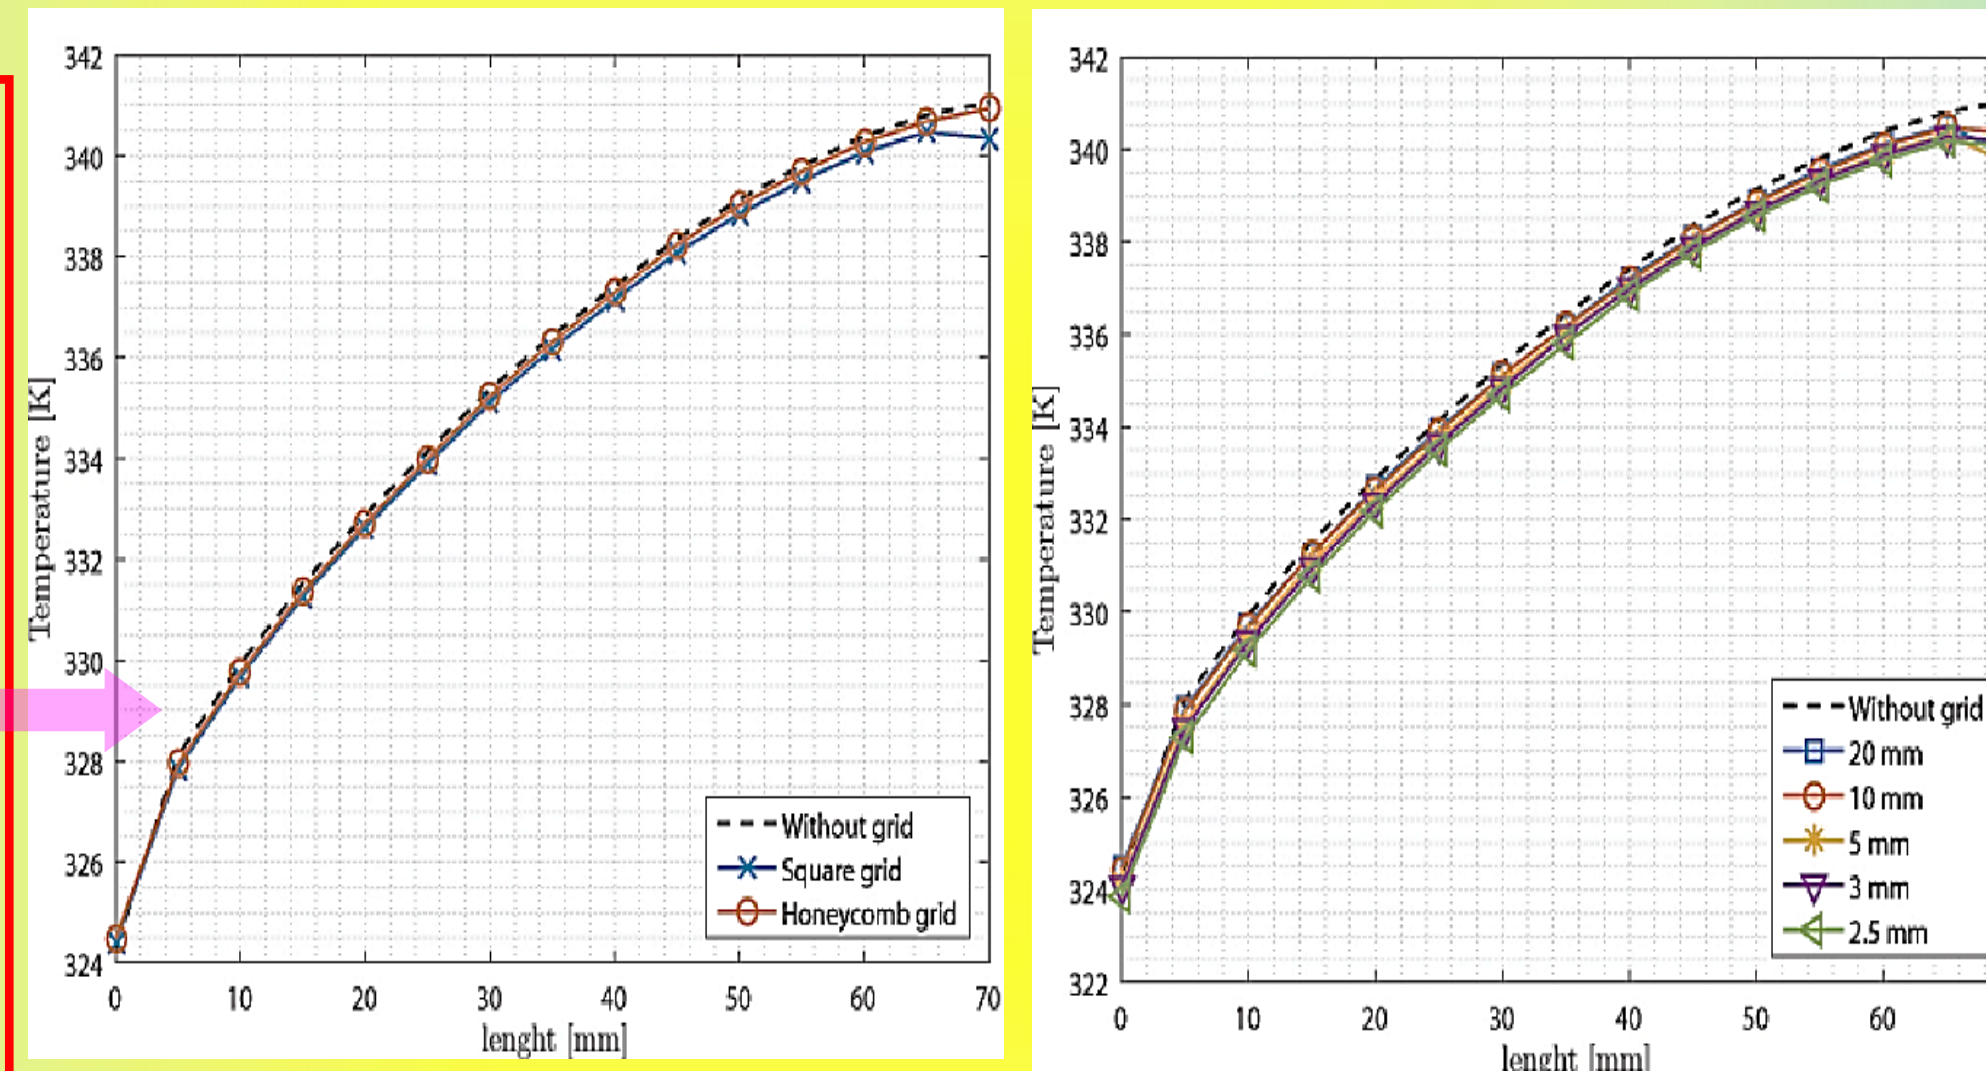

Temperature along the channel. On the left figure the distance between the grid and channel is constant at 10 mm. On the figure in the right side this distance is varied.

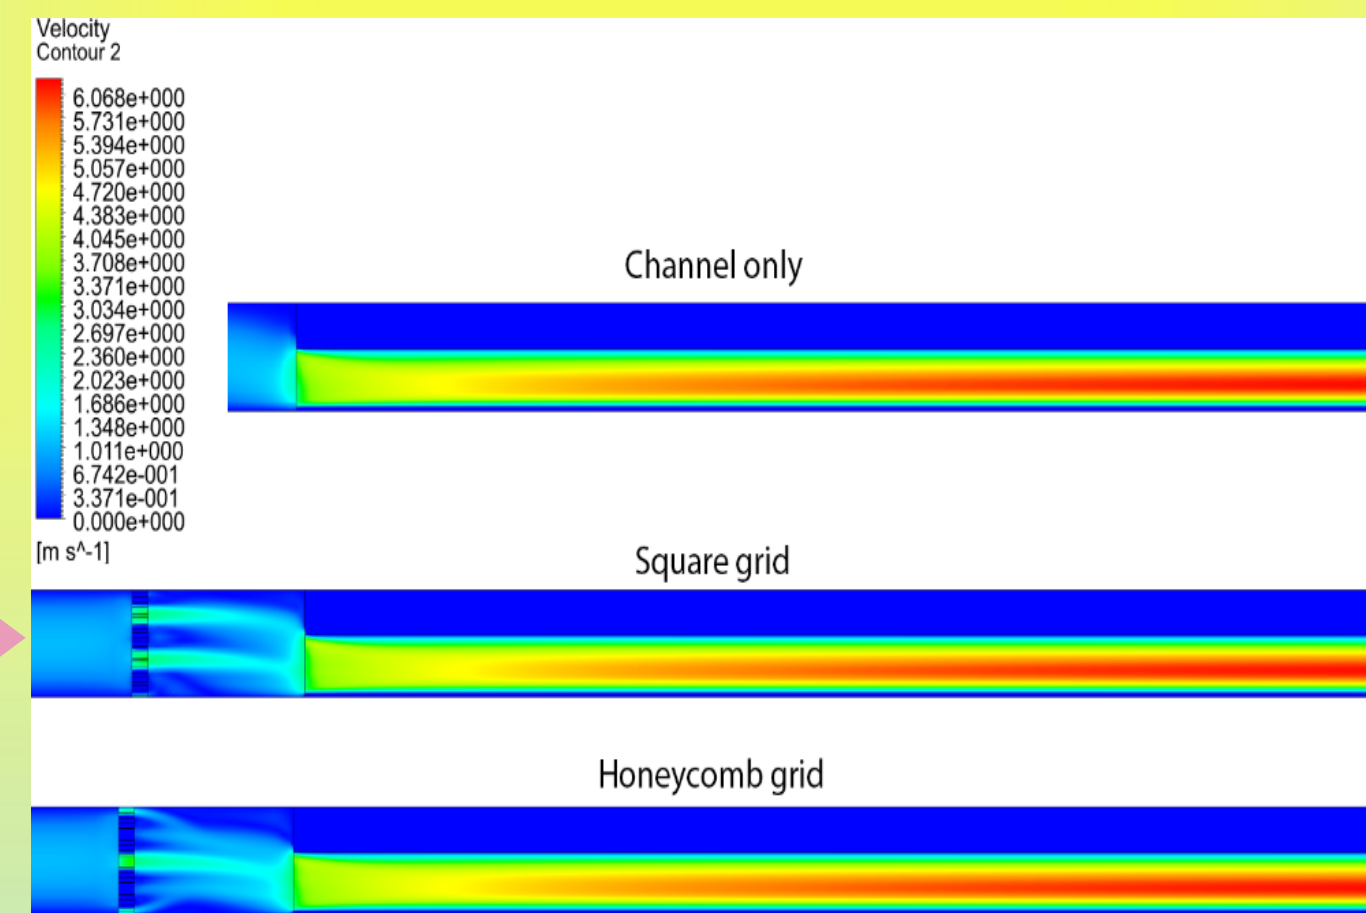

Velocity distribution along the channel.

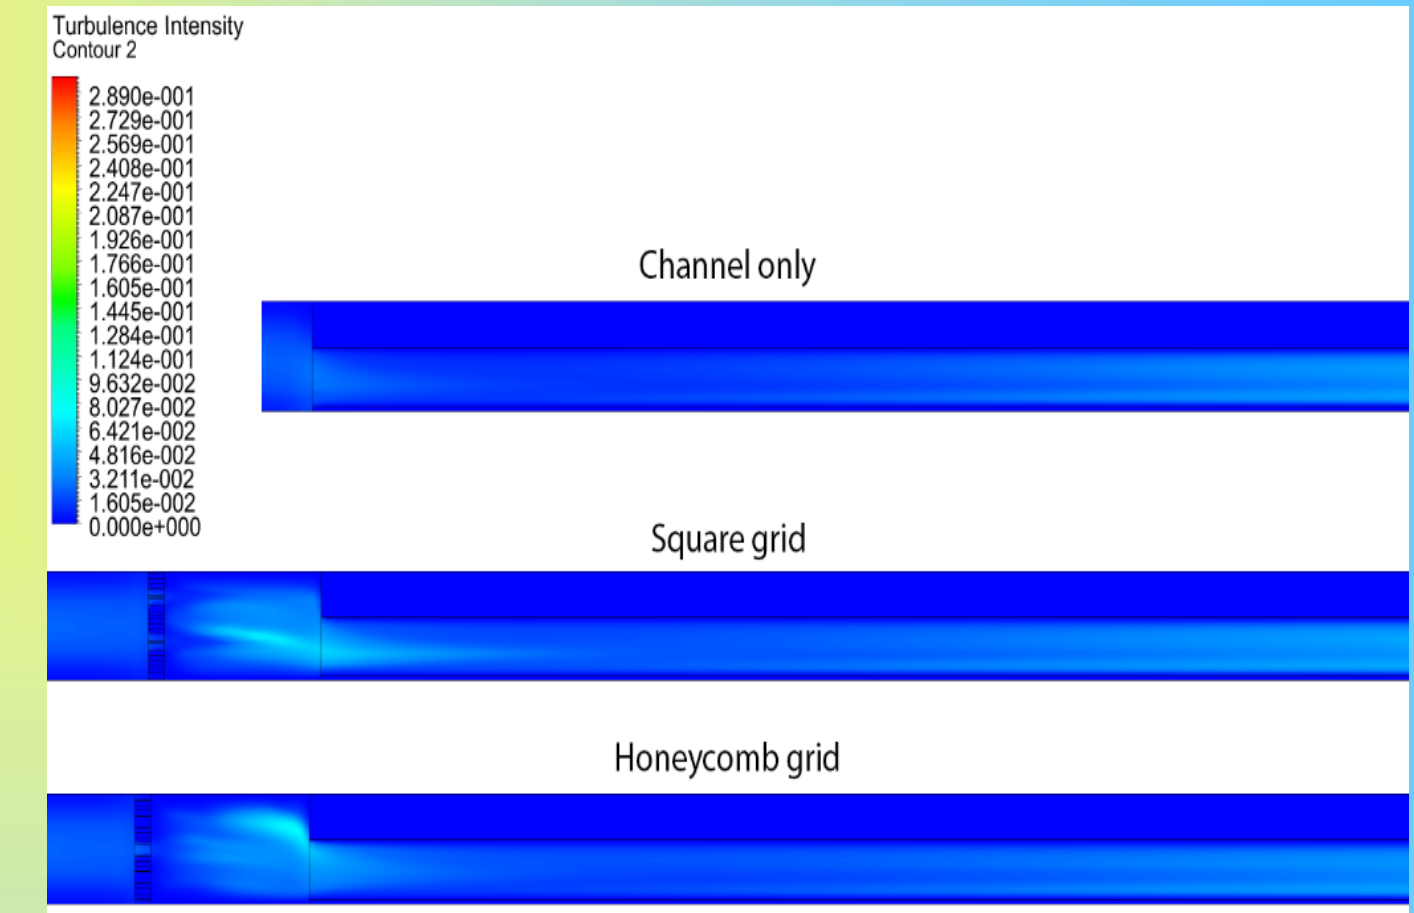

Turbulence intensity distribution along the channel.

Computational Fluid Dynamics (CFD)

Reynolds Average Navier Stokes Equations (RANS)

$$\bar{u} = \bar{u} + u' \quad [1]$$

Where \bar{u} and u' are the mean and fluctuation velocity respectively. Likewise, for pressure and other quantities it is:

$$\bar{\phi} = \bar{\phi} + \phi' \quad [2]$$

Where ϕ denotes a scalar such as pressure, energy or species concentration.

Substituting the expressions into the instantaneous continuity and momentum equations and taking the time average (dropping the overbar on the mean velocity) yields the following RANS equations for continuity and momentum [ANSYS, 2018c]:

$$\frac{\partial}{\partial x_j} (\rho u_j) = 0 \quad [3]$$

$$\rho u_j \frac{\partial u_i}{\partial x_j} = \frac{1}{\rho} \frac{\partial p}{\partial x_i} + \frac{\partial}{\partial x_j} \left(\mu \frac{\partial u_i}{\partial x_j} \right) + \rho g + \frac{\partial}{\partial x_j} (-\rho \bar{u}_i' u_j') \quad [4]$$

where the term $(-\rho \bar{u}_i' u_j')$ is the Reynolds stresses and are modelled with the turbulence model SST-k- ω , μ is viscosity; g is the gravitational constant and ρ is the density.


Energy Equations

The energy equation the fluid is given as:


$$\rho u_j \frac{\partial T_f}{\partial x_j} = \frac{1}{\rho c_{pf}} \frac{\partial}{\partial x_j} \left(k_f \frac{\partial T_f}{\partial x_j} \right) \quad [5]$$

Where c_{pf} is the fluid heat capacity, k_f is the thermal conductivity of the fluid and T_f is the temperature of the fluid. The energy equation for the solid region is given as:


$$\frac{\partial}{\partial x_j} \left(k_s \frac{\partial T_s}{\partial x_j} \right) = 0 \quad [6]$$

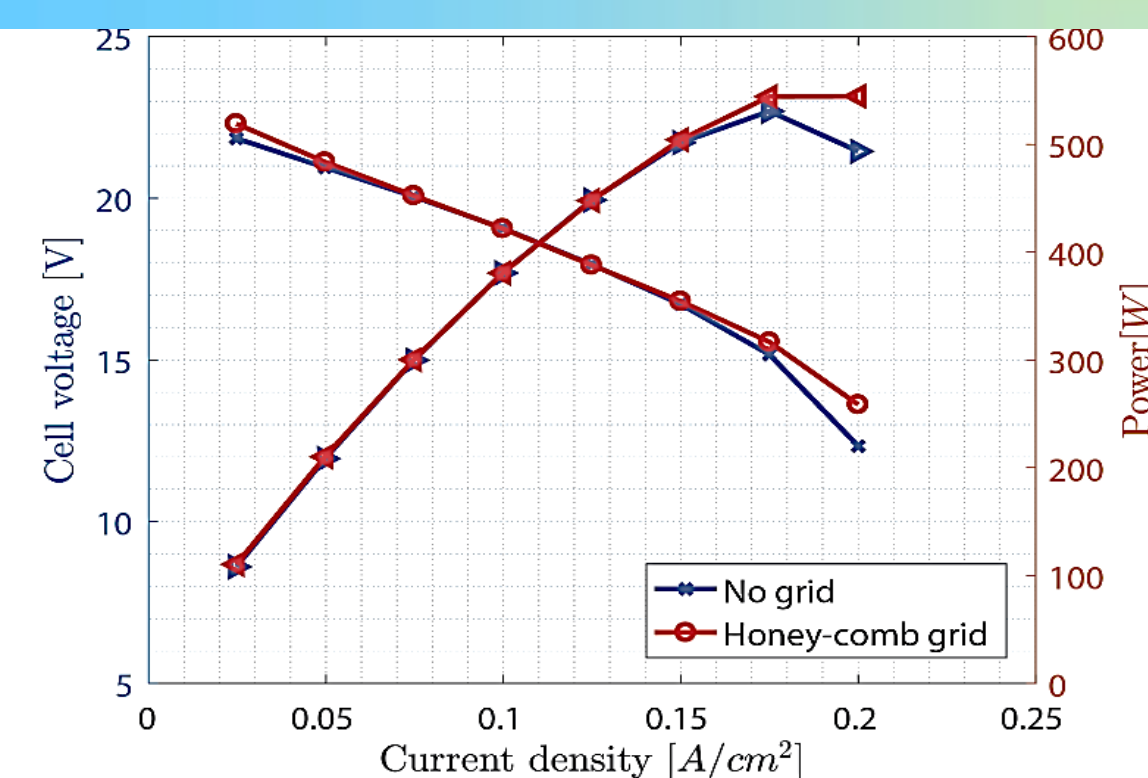


Polarization curve of the experiment with honeycomb grid and no grid

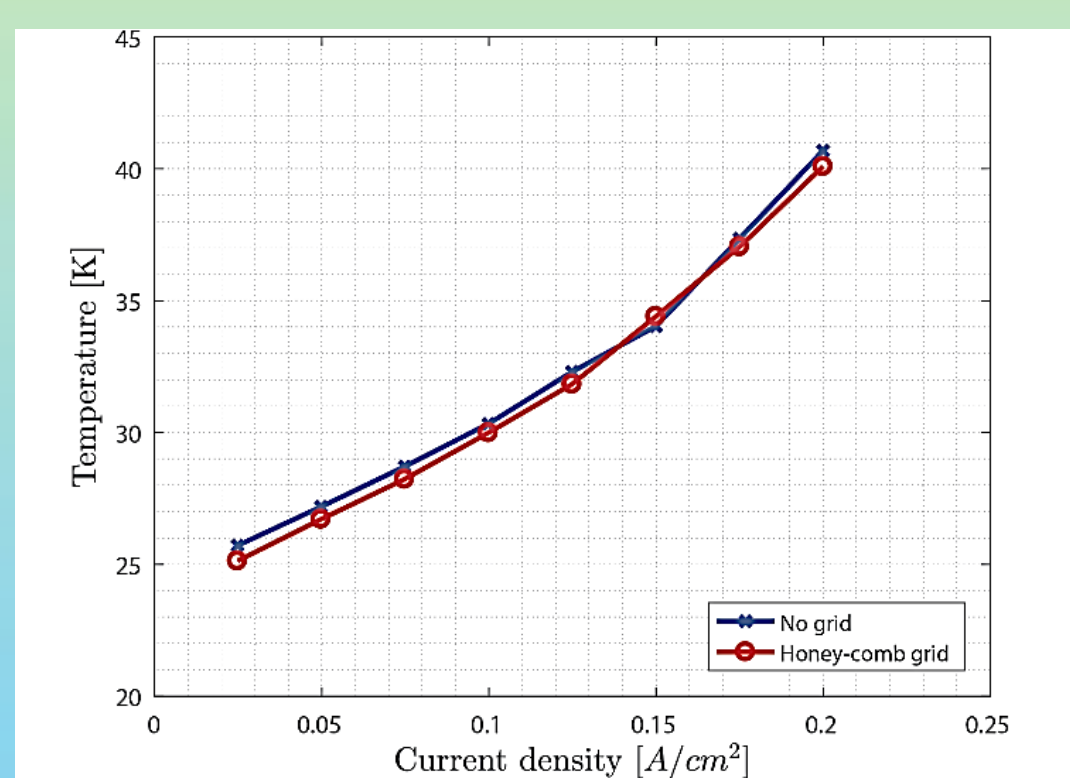

Temperature at the cathode inlet channel with honeycomb grid and no grid.

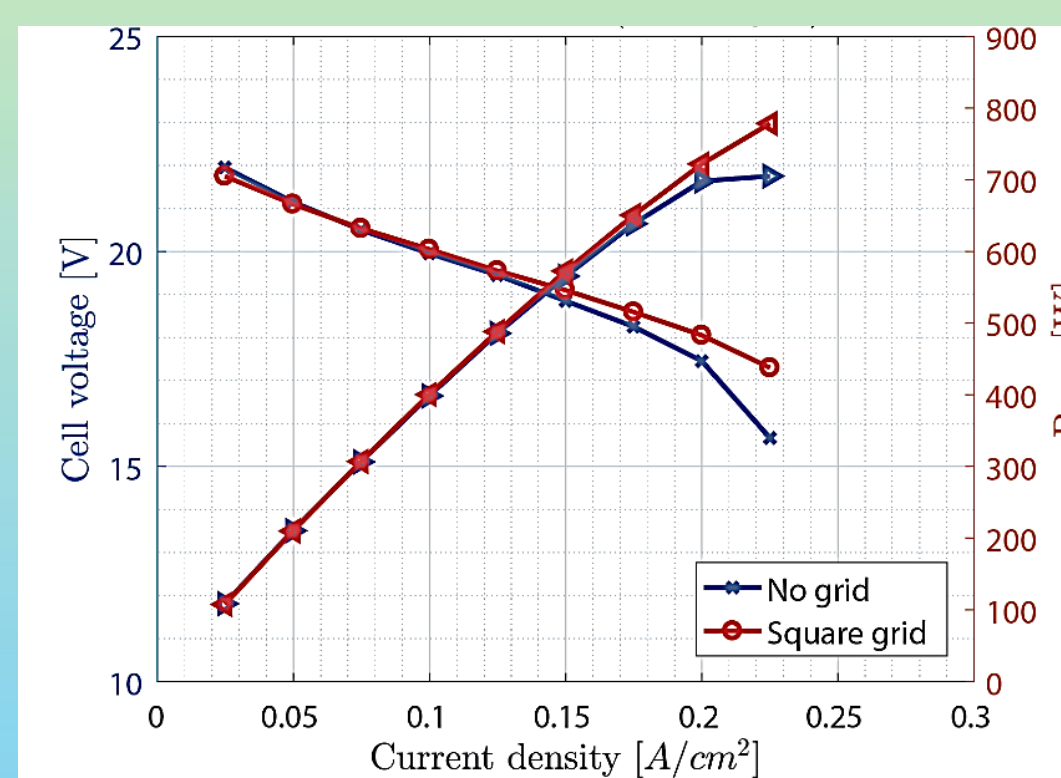

Polarization curve of the experiment with square grid and no grid

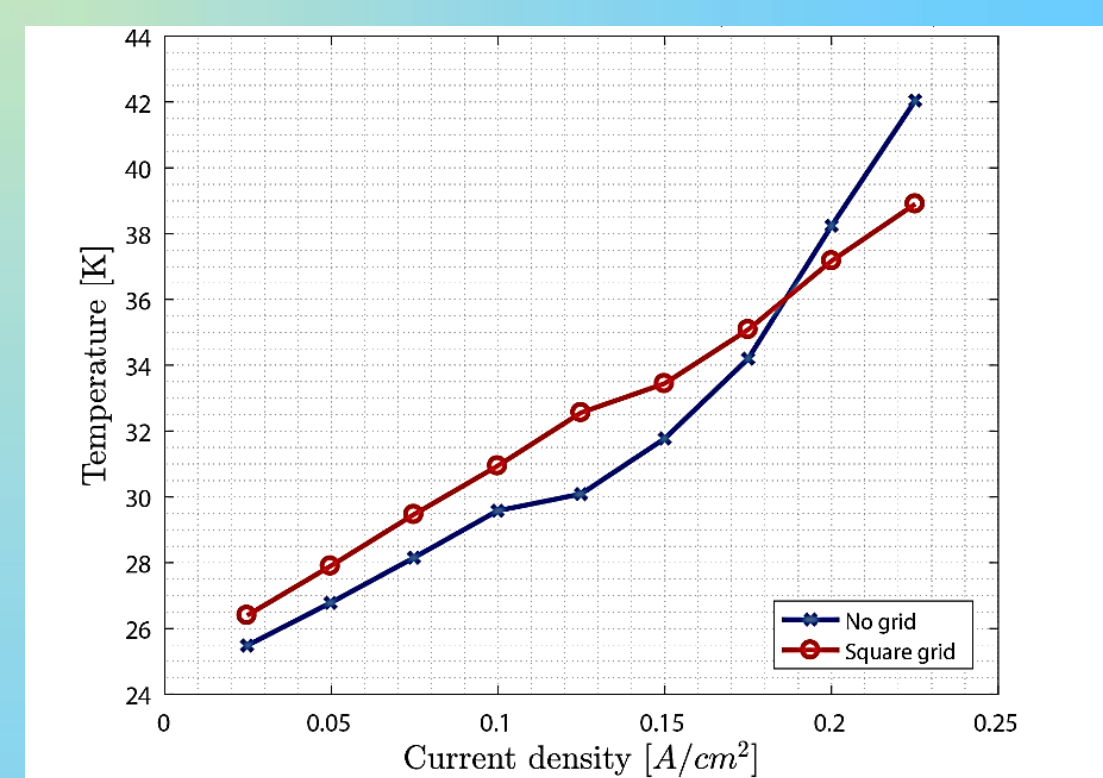

Temperature at the cathode inlet channel with square grid and no grid.

- There is a slight decrease in temperature when the two grids are implemented.
- The square grid effect on the temperature is larger.
- The effect of the grid is seen right after the grid and before the channel, and the velocity distribution is almost identical along the channel.
- The increase in turbulence intensity is highest for the case with the square grid.

- The honeycomb grid has increased the performance by 2.75 %, and the square grid has increased the performance by 10.42%
- The temperature of the air at the channel inlet is generally lower with the grid.
- The square grid indeed results in more effective cooling and higher performances.
- The experiment assisted the model by showing an improved performance of the air-cooled fuel cell stack by placing grids before the cathode inlet and furthermore resulted in decreasing temperatures.