

## **Ferrofluid irreversibility and heat transfer simulation inside a permeable space including Lorentz forces**

Li, Zhixiong; Hedayat, Mohammadali; Arabkoohsar, Ahmad; Sheikholeslami, M.; Shafee, Ahmad; Ayed, Mossaad Ben; Tlili, I.; Nguyen, Truong Khang

*Published in:*  
Physica A: Statistical Mechanics and its Applications

*DOI (link to publication from Publisher):*  
[10.1016/j.physa.2019.121492](https://doi.org/10.1016/j.physa.2019.121492)

*Creative Commons License*  
CC BY-NC-ND 4.0

*Publication date:*  
2019

*Document Version*  
Accepted author manuscript, peer reviewed version

[Link to publication from Aalborg University](#)

*Citation for published version (APA):*  
Li, Z., Hedayat, M., Arabkoohsar, A., Sheikholeslami, M., Shafee, A., Ayed, M. B., Tlili, I., & Nguyen, T. K. (2019). Ferrofluid irreversibility and heat transfer simulation inside a permeable space including Lorentz forces. *Physica A: Statistical Mechanics and its Applications*, 528, Article 121492. <https://doi.org/10.1016/j.physa.2019.121492>

### **General rights**

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

### **Take down policy**

If you believe that this document breaches copyright please contact us at [vbn@aub.aau.dk](mailto:vbn@aub.aau.dk) providing details, and we will remove access to the work immediately and investigate your claim.



## Accepted Manuscript

Ferrofluid irreversibility and heat transfer simulation inside a permeable space including Lorentz forces

Zhixiong Li, Mohammadali Hedayat, A. Arabkoohsar,  
M. Sheikholeslami, Ahmad Shafee, Mossaad Ben Ayed, I. Tlili,  
Truong Khang Nguyen



PII: S0378-4371(19)30885-4  
DOI: <https://doi.org/10.1016/j.physa.2019.121492>  
Article number: 121492  
Reference: PHYSA 121492

To appear in: *Physica A*

Received date: 7 January 2019

Revised date: 5 April 2019

Please cite this article as: Z. Li, M. Hedayat, A. Arabkoohsar et al., Ferrofluid irreversibility and heat transfer simulation inside a permeable space including Lorentz forces, *Physica A* (2019), <https://doi.org/10.1016/j.physa.2019.121492>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

### Highlights

- ✓ Ferrofluid exergy behavior is investigated within porous media.
- ✓ CVPFEM is implemented to model MHD effect on nanofluid.
- ✓ Entropy generation augments with rise of Hartmann number.
- ✓ Bejan number has direct relationship with magnetic field.



**Ferrofluid irreversibility and heat transfer simulation inside a permeable space  
including Lorentz forces**

Zhixiong Li <sup>a,b</sup>, Mohammadali Hedayat <sup>c</sup>, A. Arabkoohsar <sup>d</sup>, M. Sheikholeslami <sup>e</sup>, Ahmad S. Saeed <sup>f</sup>, Mossaad Ben Ayed <sup>g,h</sup>, I. Tlili <sup>i</sup>, Truong Khang Nguyen <sup>1,j,k</sup>

<sup>a</sup> School of Engineering, Ocean University of China, Qingdao 266100, China

<sup>b</sup> School of Mechanical, Materials, Mechatronic and Biomedical Engineering, University of Wollongong, Wollongong, NSW 2522, Australia

<sup>c</sup> J. Mike Walker '66 Department of Mechanical Engineering, Texas A&M University, College Station, USA

<sup>d</sup> Department of Energy Technology, Aalborg University, Denmark

<sup>e</sup> Department of Mechanical Engineering, Babol Noshirvani University of Technology, Babol, Islamic Republic of Iran

<sup>f</sup> Public Authority of Applied Education & Training, College of Technological Studies, Applied Science Department, Shuwaikh, Kuwait

<sup>g</sup> Computer Science Department, College of Science and Humanities at Al-Qadisiyah, Majmaah University, Al-Majmaah, 11952, Saudi Arabia

<sup>h</sup> Computer and Embedded System Laboratory, Sfax University, Tunisia

<sup>i</sup> Department of Mechanical and Industrial Engineering, College of Engineering, Majmaah University, Al-Majmaah 11952, Saudi Arabia

<sup>j</sup> Division of Computational Physics, Institute for Computational Science, Ton Duc Thang University, Ho Chi Minh City, Vietnam

<sup>k</sup> Faculty of Electrical and Electronics Engineering, Ton Duc Thang University, Ho Chi Minh City, Vietnam

**Abstract**

In current paper, exergy simulation of free convection is scrutinized. In current mathematical framework, uniform magnetic field is adopted. In order to save the time, single phase model has been involved for nanofluid. Trend of Darcy, Hartmann and Rayleigh numbers on Bejan number, exergy loss and Nusselt number are captured through figures. Obtained outputs have indicated the growth of  $Nu_{ave}$  with the Darcy and Rayleigh numbers. A growth of Lorentz forces reflects greater exergy loss. To get the desired outcomes for application prospective, lower Hartmann number should be selected.

**Keywords:** CCFEM, Exergy; Nanofluid; Heat transfer; Lorentz force.

<sup>1</sup> Corresponding author:

Email: [nguyentruongkhang@tdtu.edu.vn](mailto:nguyentruongkhang@tdtu.edu.vn) (Truong Khang Nguyen)

## 1. Introduction

Mixing of nanoparticles in a pure carrier fluid significantly augment the thermal conductivity, consequently improve heat transfer rate which can be helpful in various industrial process. Common used coolant, like water for illustration, is about three orders magnitude lower in the heat conduction when compared with metals. Recent decades, nanofluids are utilized in numerous areas [1-9]. Rashid et al. [10] carried out the macroscopic modeling for wavy porous duct including second grade fluid. They imposed both magnetic and electric fields. Non-Newtonian flow due to Lorentz forces and imposed chemical reaction was investigated by Roy and Gorla [11]. They reported lower skin friction with rise of magnetic forces. Their outputs indicated that Schmidt number has direct relation with Sherwood number.

New modeling approach for analyzing entropy generation of nanofluid has been offered by Sheikholeslami [12]. He displayed that permeability has reverse relation with Bejan number. Third grad nanofluid movement within non stationary domain was simulated by Shah et al. [13]. They supposed that bottom wall is stretched. They incorporated thermophoresis impact on energy transportation. Impact of chemical reaction on Eyring-Powell fluid motion has been scrutinized by Hayat and Nadeem [14]. They evidenced that concentration declines with rise of reaction parameter. Thermal radiation impact on nanoparticle thermal behavior was explained by Nasir et al. [15]. They imposed MHD and reported Sherwood number to describe concentration of nanofluid. Various nanoparticles have been tested by Rehman and Nadeem [16] for nanofluid transport along stretching forces. Maximum Nusselt number has been obtained with selecting copper. Two magnetic sources' impacts on thermal treatment of ferrofluid were investigated by Muhammad et al. [17]. They demonstrated that temperature profile augments with rise of ferrohydrodynamic parameter. Prandtl fluid model formulation has been constructed by Bilal et al. [18]. They also involved

thermo diffusion impacts. They concluded that Sherwood number declines with augment of Dufour number. Nanofluid layer behavior in existence of EHD has been analyzed by Moatimid and Hassan [19]. They provided instability analysis for two pure fluids. Numerical developments for thermal analysis have been presented by various researchers [20-28].

In current study, we discuss the new model for magnetic force impact on nanomaterial convection by including homogenous model for ferrofluid. Exergy analysis was examined in view of second law approach. Last equations with considering non-Darcy law was simulated via innovative approach namely CVFEM which is less employed for computations of nonlinear systems.

## 2. Explanation of problem and method

Consider the laminar, steady free convection of H<sub>2</sub>O based ferrofluid in a permeable region with involving Lorentz forces. Fig. 1 describes the domain in which inner side imposed the constant heat flux. We assumed that viscous dissipation and joule heating were negligible. To add the permeability in momentum equations, Non-Darcy model was incorporated. To simplify the governing equations, pressure source terms were discarded with involving  $\Psi$ - $\omega$  formulation. CVFEM was implemented to solve the equations. This approach is very powerful due to this fact that it uses not only the advantage of FVM but also it uses the benefits of FEM for discretization [29]. To save time in simulation single phase model was employed for nanomaterial. Considering two dimensional problem leads to below equations [29]:

$$\frac{\partial v}{\partial y} + \frac{\partial u}{\partial x} = 0 \quad (1)$$

$$(B_y, B_x) = B_o (\sin \gamma, \cos \gamma), \quad (2)$$

$$(\rho_{nf}) \left( \frac{\partial u}{\partial y} v + u \frac{\partial u}{\partial x} \right) = \left[ B_y v \sigma_{nf} B_x - B_y^2 \sigma_{nf} u + \left( \frac{\partial^2 u}{\partial y^2} + \frac{\partial^2 u}{\partial x^2} \right) \mu_{nf} - \frac{\partial P}{\partial x} - u \frac{\mu_{nf}}{K} \right],$$

$$g(T - T_c) \beta_{nf} \rho_{nf} - \frac{\partial P}{\partial y} + \mu_{nf} \left( \frac{\partial^2 v}{\partial y^2} + \frac{\partial^2 v}{\partial x^2} \right) - \frac{\mu_{nf}}{K} v \quad (3)$$

$$-B_x v B_x \sigma_{nf} + B_x u \sigma_{nf} B_y = \left( v \frac{\partial v}{\partial y} + \frac{\partial v}{\partial x} u \right) \rho_{nf},$$

$$\left( u \frac{\partial T}{\partial x} + \frac{\partial T}{\partial y} v \right) = k_{nf} \left( \frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial y^2} \right) / (\rho C_p)_{nf} \quad (4)$$

As we mentioned, to estimate the properties of carrier fluid, homogenous model with following formulas was employed:

$$CC = (1 - \phi) + (\rho C_p)_s \phi / (\rho C_p)_f, CC = (\rho C_p)_{nf} / (\rho C_p)_f \quad (5)$$

$$BB = \phi (\rho \beta)_s / (\rho \beta)_f + (1 - \phi), BB = (\rho \beta)_{nf} / (\rho \beta)_f \quad (6)$$

$$\rho_s \phi + (1 - \phi) \rho_f = \rho_{nf} \quad (7)$$

$$\frac{\sigma_{nf}}{\sigma_f} = 1 + \frac{3(-1 + \Delta)\phi}{(2 + \Delta) - (-1 + \Delta)\phi} \quad (8)$$

$$\sigma_s / \sigma_f = \Delta$$

$$kk = \left( \frac{2k_f + 2\phi kd + \frac{\kappa_s}{k_s}}{2k_f - kd\phi + \frac{\kappa_s}{k_s}} \right), k_{nf} = k_{nf} / k_f, kd = k_s - k_f \quad (9)$$

$$\mu_{nf} = e^{-0.01T} (-27856.4807\phi^2 + 3.1B + 4263.02\phi + 316.0629 + 0.035B^2) \quad (10)$$

Features of nanomaterial were portrayed in table 1. To simplify the above equations, Eq. (11) was implemented and then Eq. (12) was employed to reach last equations:

$$\psi_x = -v, v_x - u_y = -\omega, \frac{\partial \psi}{\partial y} = u, \quad (11)$$

$$(X, Y) = (x, y) L^{-1}, \Delta T = q'' L / k_f, V \alpha_f L^{-1} = v, \Theta = \frac{T - T_c}{\Delta T}, \alpha_f U L^{-1} = u, \quad (12)$$

Thus, the last equations have following forms:

$$\left( \frac{\partial \Theta}{\partial X} \right) \text{Pr} Ra \left( A_2^2 \frac{A_3}{A_4^2 A_1} \right) + \text{Pr} \left( \frac{A_2 A_5}{A_4 A_1} \right) \left( \frac{\partial^2 \Omega}{\partial Y^2} + \frac{\partial^2 \Omega}{\partial X^2} \right) \quad (13)$$

$$+ \text{Pr} Ha^2 \left[ \frac{A_2 A_6}{A_4 A_1} \right] \left( -(\sin \gamma) \frac{\partial V}{\partial Y} (\cos \gamma) + (\cos \gamma) \frac{\partial U}{\partial X} (\sin \gamma) \right) \\ + \text{Pr} Ha^2 \left[ \frac{A_2 A_6}{A_4 A_1} \right] \left( (\sin \gamma)^2 \frac{\partial U}{\partial Y} - (\cos \gamma)^2 \frac{\partial V}{\partial X} \right) \\ - \left( \frac{A_5}{A_4 A_1} \right) \Omega \frac{\text{Pr}}{Da} A_2 = U \frac{\partial \Omega}{\partial X} + \frac{\partial \Omega}{\partial Y} V \quad (14)$$

$$V \frac{\partial \Theta}{\partial Y} + U \frac{\partial \Theta}{\partial X} = \left( \frac{\partial^2 \Theta}{\partial Y^2} + \frac{\partial^2 \Theta}{\partial X^2} \right) \quad (15)$$

$$\frac{\partial^2 \Psi}{\partial Y^2} + \frac{\partial^2 \Psi}{\partial X^2} = -\Omega \quad (16)$$

Dimensionless parameters which are used above equations and boundary conditions are as follows:

$$Da = \frac{K}{L^2}, Ra = \beta_f g q'' L^4 / (c_f v_f \rho_f), \quad (17)$$

$$A_6 = \frac{\sigma_{nf}}{\sigma_f}, A_2 = \frac{(\rho C_p)_{nf}}{(\rho C_p)_f}, \\ A_5 = \frac{\mu_{nf}}{\mu_f}, \text{Pr} = v_f / \alpha_f, A_1 = \frac{k_{nf}}{\rho_f}, A_4 = \frac{k_f}{\rho_f},$$

$$Ha = \sqrt{\sigma_f / \mu} B_0 L, \epsilon = \frac{(\rho \beta)_{nf}}{(\rho \beta)_f}$$

$$\left. \frac{\partial \Theta}{\partial n} \right|_{inner} = 1.0, \Psi|_{all} = 0.0, \Theta|_{outer} = 0.0 \quad (18)$$

$Nu_{loc}$  and  $Nu_{ave}$  are determined from:

$$Nu_{loc} = A_4 \left( Rd \frac{4}{3A_4} + 1 \right) \frac{1}{\Theta} \quad (18)$$

$$Nu_{ave} = \frac{1}{S} \int_0^s Nu_{loc} ds \quad (19)$$

$S_{gen,total}$ ,  $Be$  and  $X_d$  were calculated according to below formulas:

$$\begin{aligned} S_{gt} = & \underbrace{\frac{\mu_{nf}}{TK} (u^2 + v^2)}_{S_{gen,P}} \\ & + \underbrace{v^2 \sigma_{nf} B_0^2 T^{-2}}_{S_{gen,M}} + \underbrace{T^{-2} \left[ \left( \frac{\partial T}{\partial x} \right)^2 + \left( \frac{\partial T}{\partial y} \right)^2 \right] k_{nf}}_{S_{gen,th}} \\ & + \underbrace{\left[ 2 \left( \frac{\partial u}{\partial x} \right)^2 + 2 \left( \frac{\partial v}{\partial y} \right)^2 + \left( \frac{\partial v}{\partial x} + \frac{\partial u}{\partial y} \right)^2 \right] \mu_{nf} T^{-2}}_{S_{gen,f}} \end{aligned} \quad (20)$$

$$Be = S_{gen,th} / S_{gt} \quad (21)$$

$$X_d = S_{gt} T_0 \quad (22)$$

### 3. Results and discussion

Simulations were executed to illustrate the new concept of energy and exergy treatment of convective flow of nanomaterial within a permeable region. Non Darcy and single phase models were incorporated considering  $\Psi$ - $\omega$  formulation. The governing non dimensional system has been figure out numerically by means of CVFEM. Influences of buoyancy and Lorentz forces were accounted in view of entropy analysis.

Prior to the validation and presenting outputs, the mesh sensitivity analysis has been examined. As displayed in table 2,  $Nu_{ave}$  has no changes after 3<sup>rd</sup> mesh, so this grid can

guarantee a grid independent output. The computational outputs for the special case have been verified by comparisons with current outputs in existing studies [30] in table 3 and the outputs were in nice agreement. Figs. 2, 3, 4 and 5 portray various components of entropy,  $Be$  and  $X_d$  as well as nanomaterial hydrothermal behavior. At low values of  $Da$  and  $Ra$ , contours expounded that the isotherms forms a pack of straight lines along the boundaries which indicates conduction mode. By augmenting Rayleigh number, nanofluid transport boosts up and convection develops but it has an inverse correlation with Bejan number. Thermal plume can be progressed easily in greater values of  $Ra$ . When permeability of region augments, it improves the convection. Also, thinner boundary layer was reported as a result of augmenting Rayleigh number. Thermal boundary thickness grows when  $Ha$  augments. Entropy generation reinforces with augment of magnetic forces. One can perceived that nanofluid transportation enhances with rise of Darcy number. So, exergy loss declines with augment of  $Da$ .  $Be$  and  $X_d$  have inverse relation with permeability and buoyancy force. So, with augment of  $Ra$  and  $Da$ , entropy generation become weaker and as an outputs less resistance has been affected the domain. Boundary layer thickness becomes thicker for greater Hartmann number due to reduction of flow in appearance of resisting force. Beside, exergy loss has direct relation with Lorentz forces. Similar trend is reported for Bejan number.

$Be$ ,  $Nu_{ave}$ , and  $X_d$  variations were deliberated in Figs. 6, 7 and 8 for different active parameters. In addition, following formulas can be offered:

$$Nu_{ave} = 1.11 + 0.033Da + 0.21\log(Ra) - 0.41Ha + 0.035Da\log(Ra) - 0.22DaHa - 0.13\log(Ra)Ha \quad (23)$$

$$Be = 0.95 - 8.5 \times 10^{-3}Da - 0.0931\log(Ra) + 0.03Ha - 5.38 \times 10^{-3}Da\log(Ra) + 3.25 \times 10^{-3}DaHa + 0.019\log(Ra)Ha \quad (24)$$

$$X_d = 70.64 - 1.34Da - 7.71\log(Ra) + 14.43Ha + 0.13Da\log(Ra) + 7.23DaHa + 1.29\log(Ra)Ha \quad (25)$$

Temperature distribution augments with greater values of Darcy number. So, free convection proliferates with  $Da$ . Stronger resisting force can be obtained with rise of  $Ha$ . Thus,  $Nu_{ave}$  declines with rise of  $Ha$ . There are reductions in  $Be$  and  $X_d$  for higher values of  $Da$  and  $Ra$ .

#### 4. Conclusions

This paper was focused on nanofluid, laminar, free convection in a porous domain including exergy analysis. Non-Darcy model and Lorentz forces impacts were incorporated. The homogeneous model was utilized to characterize the features of nanomaterial. Comparison of our outputs with previous outputs was made for various  $Ra$  and found to be in nice agreement. The outputs revealed that the exergy loss is in a direction proportion with Hartmann number. For higher values of  $Da$ , nanofluid motion enriches and consequently  $Nu_{ave}$  augments. Isotherms become curly with rise of permeability

**Acknowledgment:** Dr. Massaad Ben Ayed would like to thank Deanship of Scientific Research at Majmaah University for supporting this work under the Project Number No. 1440-51.

#### References

- [1] Sivasankaran, S., A. I. Alsabery, and I. Hashim, Internal heat generation effect on transient natural convection in a nanofluid-saturated local thermal non-equilibrium porous inclined cavity, *Physica A: Statistical Mechanics and its Applications* 509, (2018) 275-293



- [2] GHR Kefayati, NAC Sidik, Simulation of natural convection and entropy generation of non-Newtonian nanofluid in an inclined cavity using Buongiorno's mathematical model (Part II, entropy generation), Powder Technology 305 (2017) 679-703.
- [3] M. Sheikholeslami, M. Jafaryar, Ahmad Shafee, Zhixiong Li, Rizwan-ur Haq, Heat transfer of nanoparticles employing innovative turbulator considering entropy generation, International Journal of Heat and Mass Transfer 136 (2019) 1232-1240.
- [4] S. Nadeem, Shafiq Ahmad, Noor Muhammad, Computational study of Falkner-Skan problem for a static and moving wedge Sensors and Actuators, B: Chemical (2018) 263 DOI: 10.1016/j.snb.2018.02.039
- [5] Mohsen Sheikholeslami, Ahmad Arabkoohsar, Yassir Knan, Ahmad Shafee, Zhixiong Li, Impact of Lorentz forces on Fe<sub>3</sub>O<sub>4</sub>-water ferrofluid entropy and exergy treatment within a permeable semi annulus, Journal of Cleaner Production, 221 (2019) 885-898
- [6] S. Ijaz, S. Nadeem, Consequences of blood mediated nano transportation as drug agent to attenuate the atherosclerotic lesions with permeability impacts, Journal of Molecular Liquids, 262 (2018) 565-575
- [7] M. Sheikholeslami, Rizwan-ur Haq, Ahmad Shafee, Zhixiong Li, Yassir G. Elaraki, I. Tlili, Heat transfer simulation of heat storage unit with nanoparticles and fins through a heat exchanger, International Journal of Heat and Mass Transfer 135 (2019) 470-478
- [8] Xiaohong Su, Liangjun Zheng, Xinxin Zhang, Junhong Zhang, MHD mixed convective heat transfer over a permeable stretching wedge with thermal radiation and ohmic heating, Chemical Engineering Science, 78 (2012) 1-8

- [9] S. Ijaz, S. Nadeem, A biomedical solicitation examination of nanoparticles as drug agents to minimize the hemodynamics of a stenotic channel, *Eur. Phys. J. Plus* (2017) 132: 448.  
<https://doi.org/10.1140/epjp/i2017-11703-6>
- [10] M. Rashid, Iqra Shahzadi, S. Nadeem, Corrugated walls analysis in microchannels through porous medium under Electromagnetohydrodynamic (EMHD) effects, *Results in Physics* 9 (2018) 171-182
- [11] Nepal C. Roy, R. S. R. Gorla, Effects of radiation and magnetic field on mixed convection flow of non-Newtonian power-law fluids across a cylinder in the presence of chemical reaction, *Heat and Mass Transfer*, Vol. 55, No. 2, pp. 341–351 (2019).  
[doi:10.1007/s00231-018-2413-4](https://doi.org/10.1007/s00231-018-2413-4)
- [12] M. Sheikholeslami, New computational approach for exergy and entropy analysis of nanofluid under the impact of Lorentz force through a porous media, *Computer Methods in Applied Mechanics and Engineering* 344 (2019) 319–333
- [13] Zahir Shah, Saeed Islam, Taza Gul, Fonezer Bonyah, Altaf Khan, Three dimensional third grade nanofluid flow in a rotating system between parallel plates with Brownian motion and thermophoresis effects, *Results in Phys.* 10 (2018) 36–45
- [14] Tanzila Hayat, S. Nadeem, Flow of 3D Eyring-Powell fluid by utilizing Cattaneo-Christov heat flux model and chemical processes over an exponentially stretching surface, *Results in Physics* 8 (2018) 397-403
- [15] Saleem Nasir, Saeed Islam, Taza Gul, Zahir Shah, Muhammad Altaf Khan, Waris Khan, Auranq Zeb Khan, Saima Khan, Three dimensional rotating flow of MHD single wall carbon nanotubes over a stretching sheet in presence of thermal radiation, *Applied Nanoscience*, <https://doi.org/10.1007/s13204-018-0766-0>.

- [16] Fiaz Ur Rehman, S. Nadeem, Heat Transfer Analysis for Three-Dimensional Stagnation-Point Flow of Water-Based Nanofluid over an Exponentially Stretching Surface, *Journal of Heat Transfer* (2018) 140(5) HT-17-1037; doi: 10.1115/1.4038359
- [17] Noor Muhammad, Sohail Nadeem, MT Mustafa, Impact of magnetic dipole on a thermally stratified ferrofluid past a stretchable surface, *Proceedings of the Institution of Mechanical Engineers, Part E: Journal of Process Mechanical Engineering* (2018) <https://doi.org/10.1177/0954408918759244>
- [18] S. Bilal, K.U. Rehman, M.Y. Malik, A. Hussain, M. Arif, Effect logs of double diffusion on MHD Prandtl nano fluid adjacent to stretching surface by way of numerical approach, *Results in Physics* 7 (2017) 470-479.
- [19] Galal M. Moatimid and Mohamed A. Hassan, Linear Instability of Water–Oil Electrohydrodynamic Nanofluid Layers: Analytical and Numerical Study, *Journal of Computational and Theoretical Nanoscience* 15 (2018) 1495-1510
- [20] Fengrui Sun, Yuedong Yao, Xiangfang Li, Pengliang Yu, Guanyang Ding, Ming Zou, The flow and heat transfer characteristics of superheated steam in offshore wells and analysis of superheated steam performance, *Computers & Chemical Engineering*, 2017, 100: 80-93.
- [21] M. Sheikholeslami, M. Jafaryar, Ahmad Shafee, Zhixiong Li, Simulation of nanoparticles application for expediting melting of PCM inside a finned enclosure, *Physica A: Statistical Mechanics and its Applications* 523 (2019) 544–556
- [22] Fiaz Ur Rehman, S. Nadeem, Rizwan Ul Haq, Heat transfer analysis for three-dimensional stagnation-point flow over an exponentially stretching surface, *Chinese Journal of Physics* 55 (2017) 1552-1560

- [23] M. Sheikholeslami, Omid Mahian, Enhancement of PCM solidification using inorganic nanoparticles and an external magnetic field with application in energy storage systems, *Journal of Cleaner Production* 215 (2019) 963-977
- [24] Fengrui Sun, Yuedong Yao, Xiangfang Li, Lin Zhao, Guanyang Ding, Xuejiao Zhang, The Mass and Heat Transfer Characteristics of Superheated Steam Coupled with Non-condensing Gases in Perforated Horizontal Wellbores, *Journal of Petroleum Science and Engineering*, 2017, 156: 460-467.
- [25] M. Sheikholeslami, Rizwan-ul Haq, Ahmad Shafee, Zhixiong Li, Heat transfer behavior of Nanoparticle enhanced PCM solidification through an enclosure with V shaped fins, *International Journal of Heat and Mass Transfer* 120 (2019) 1322–1342
- [26] Houman B. Rokni, Joshua D. Moore, Ashutosh Gupta, Mark A. McHugh, Manolis Gavaises, Entropy scaling based viscosity predictions for hydrocarbon mixtures and diesel fuels up to extreme conditions, *Fuel* 241 (2019) 1203-1213
- [27] M. Sheikholeslami, Numerical approach for MHD Al<sub>2</sub>O<sub>3</sub>-water nanofluid transportation inside a permeable medium using innovative computer method, *Computer Methods in Applied Mechanics and Engineering* 344 (2019) 306–318
- [28] Xiao-hong Su, Lin-cun Zheng, Xin-xin Zhang, DTM-BF method and dual solutions for unsteady MHD flow over permeable shrinking sheet with velocity slip, *Applied Mathematics and Mechanics*, 33 (2012) 1555–1568
- [29] Mohsen Sheikholeslami, Application of Control Volume based Finite Element Method (CVFEM) for Nanofluid Flow and Heat Transfer, Elsevier, (2019), ISBN: 9780128141526
- [30] G. De Vahl Davis, Natural convection of air in a square cavity, a benchmark numerical solution, *Int. J. Numer. Methods Fluids* 3 (1962) 249–264.

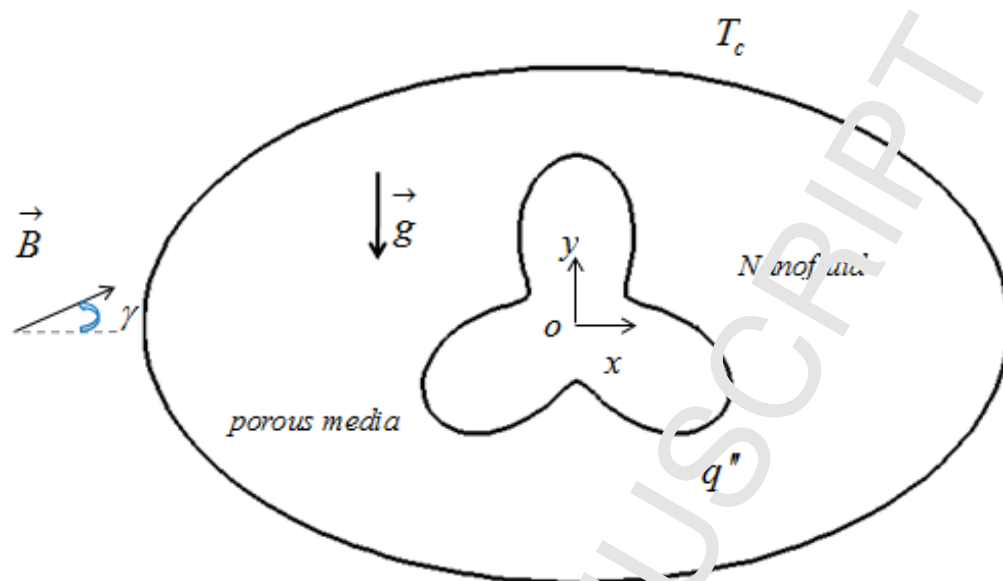
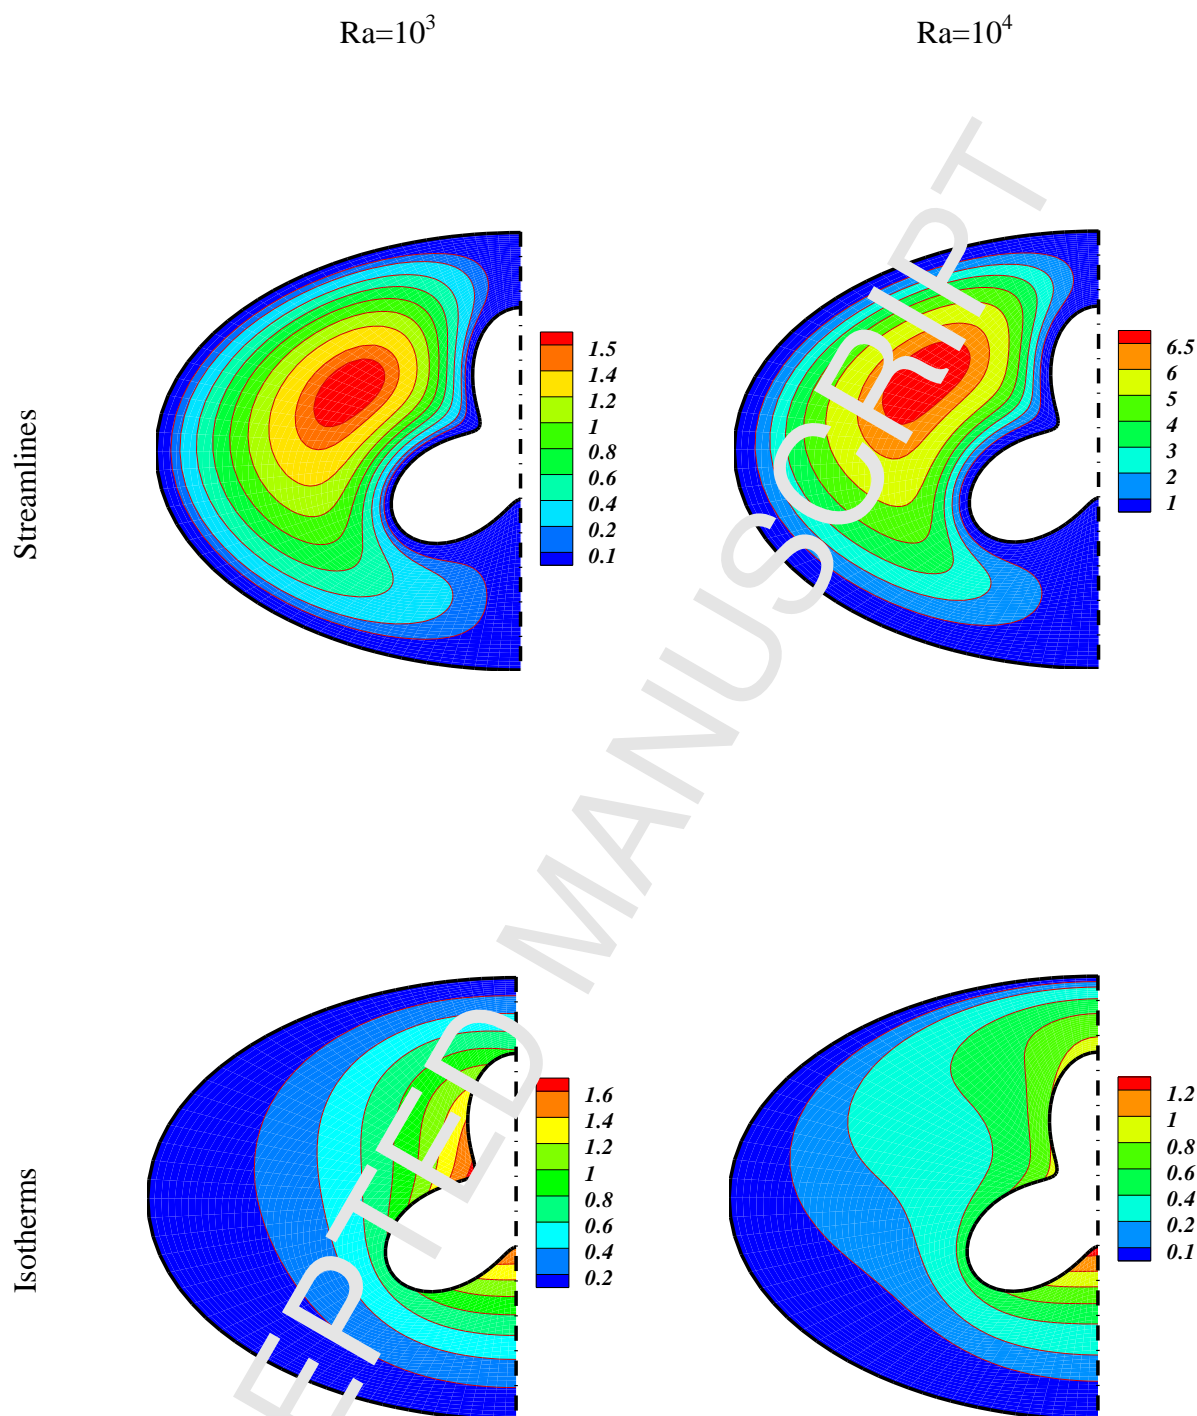
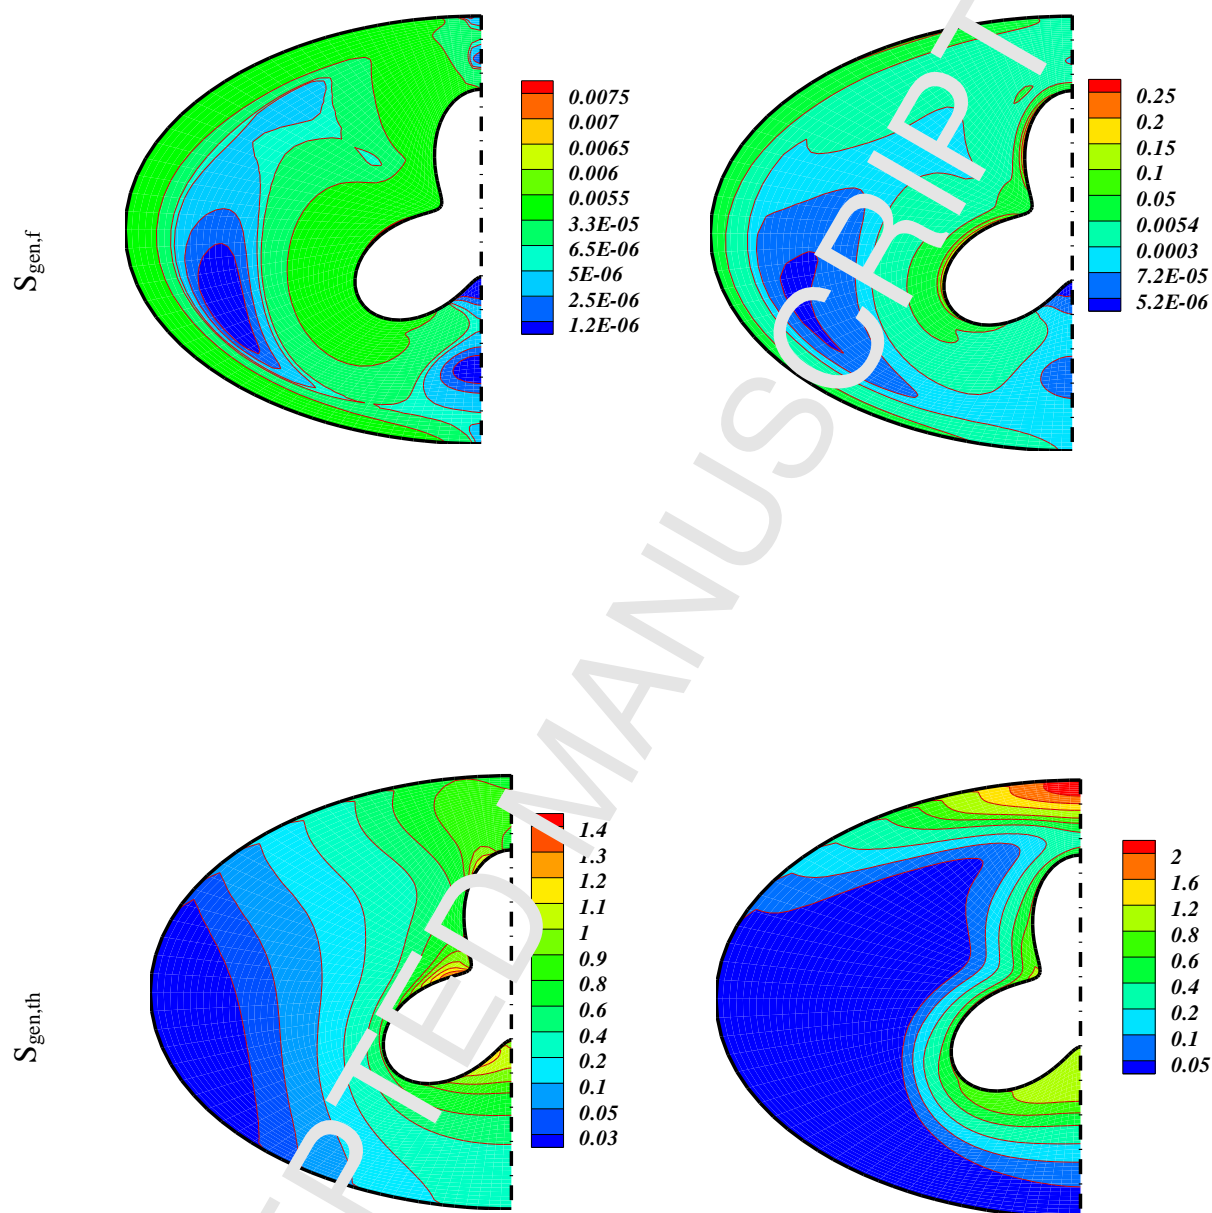
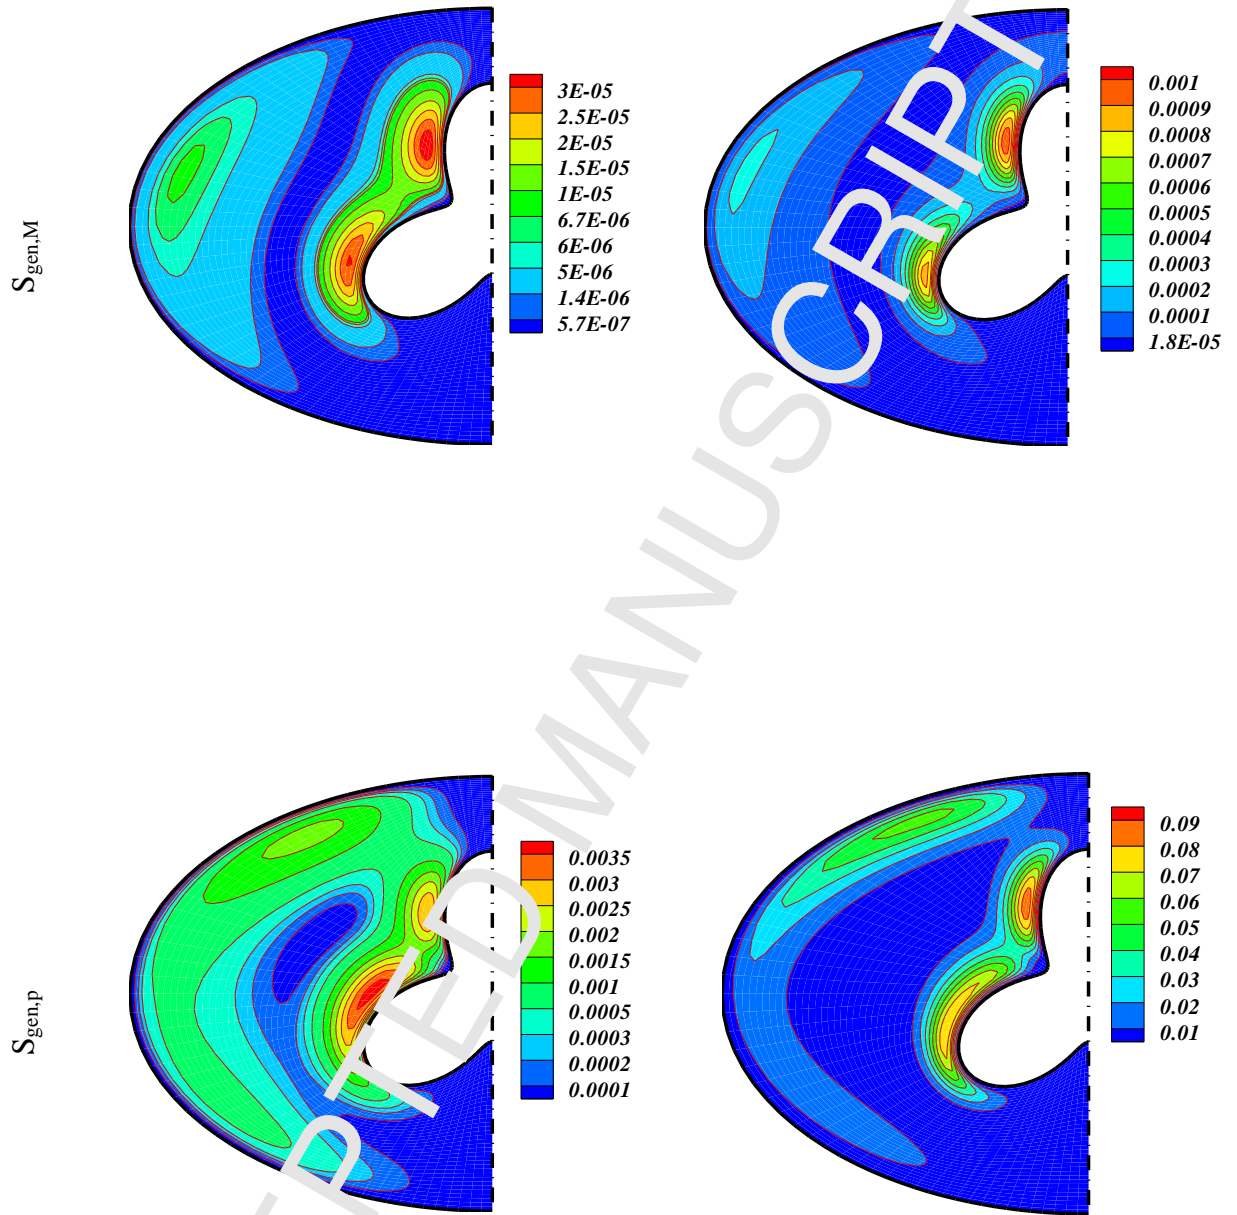


Fig. 1. Current domain with constant heat flux









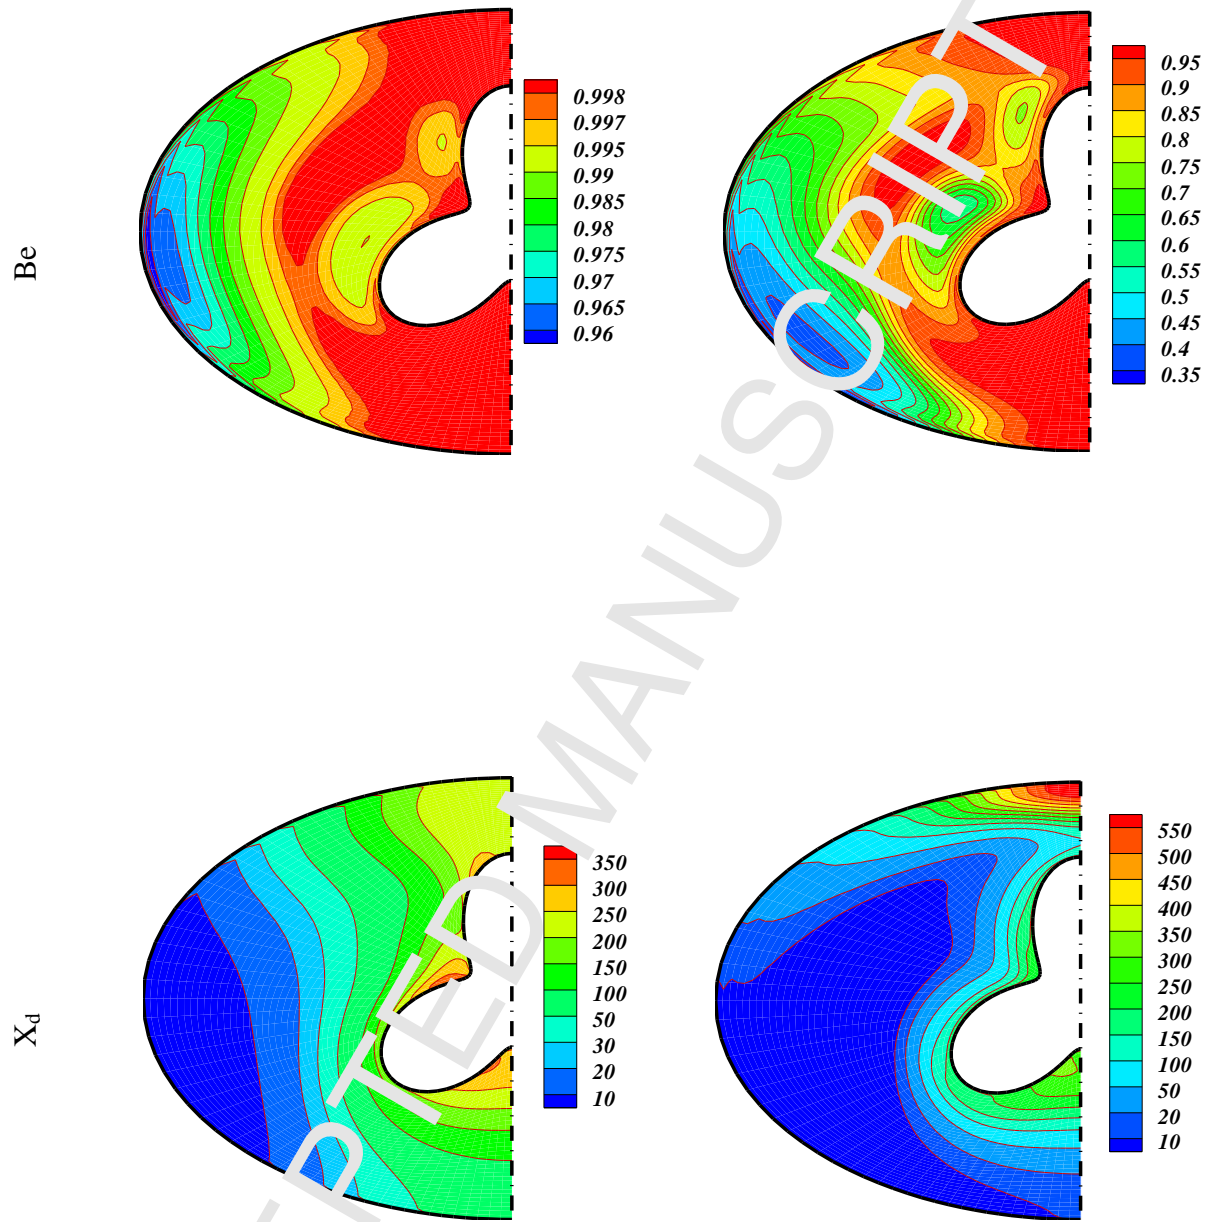
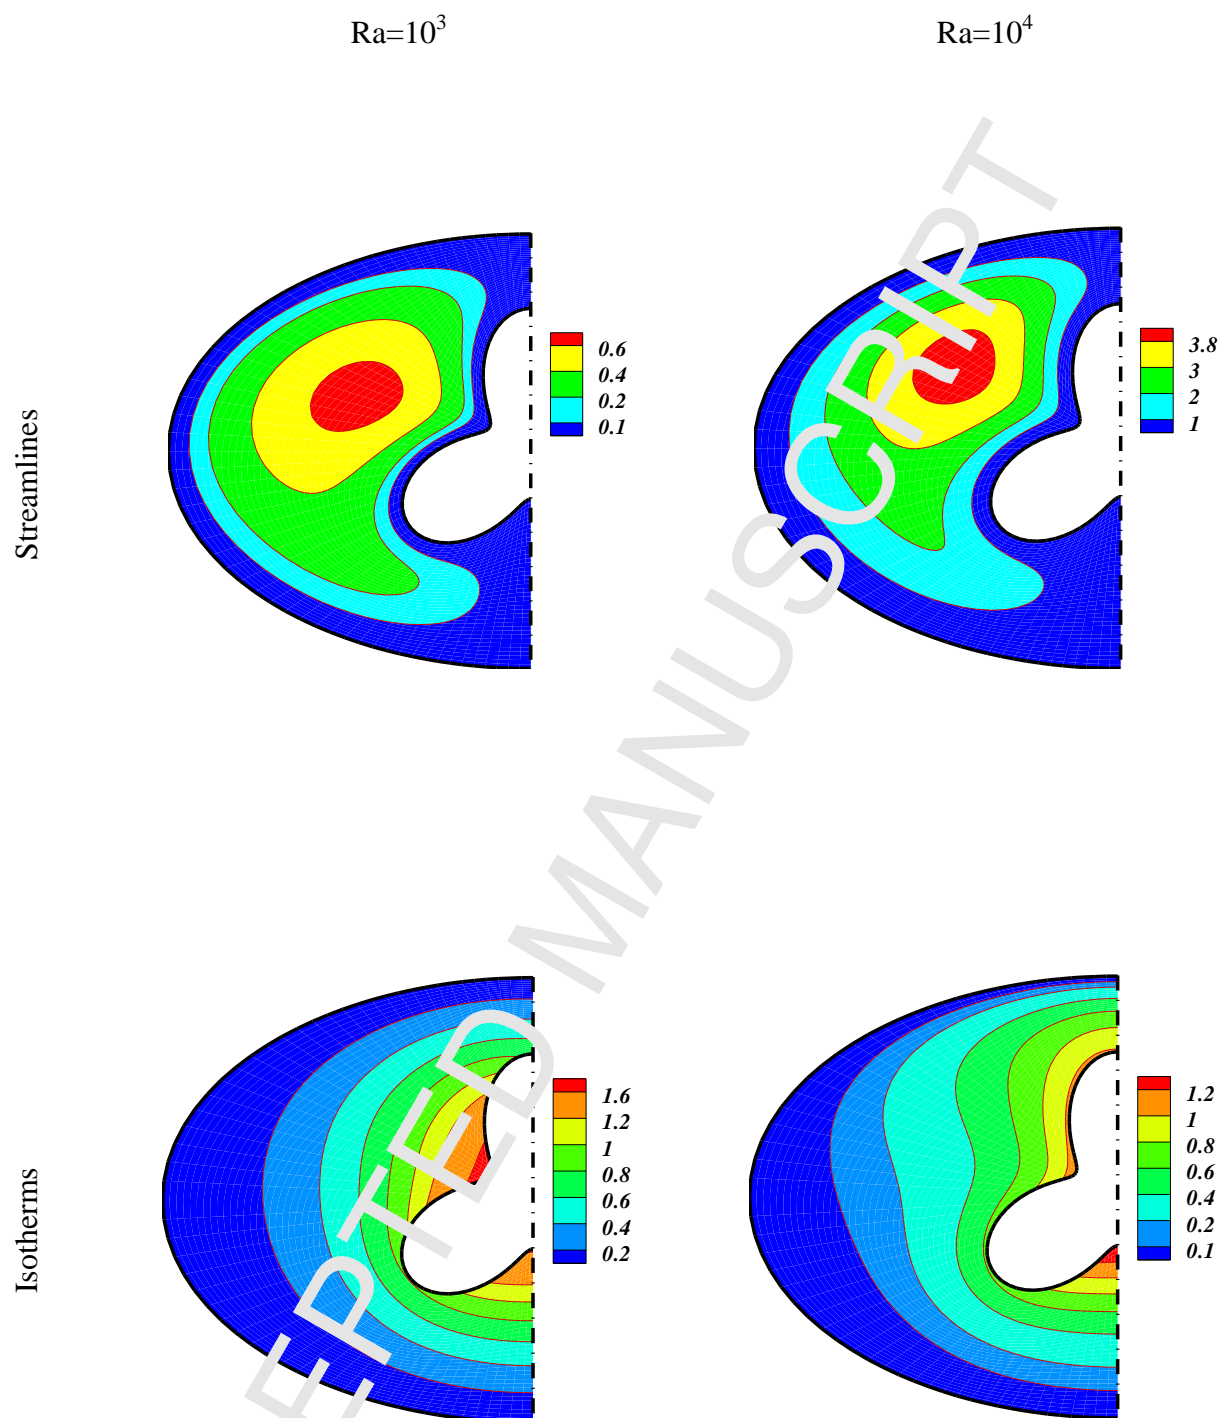
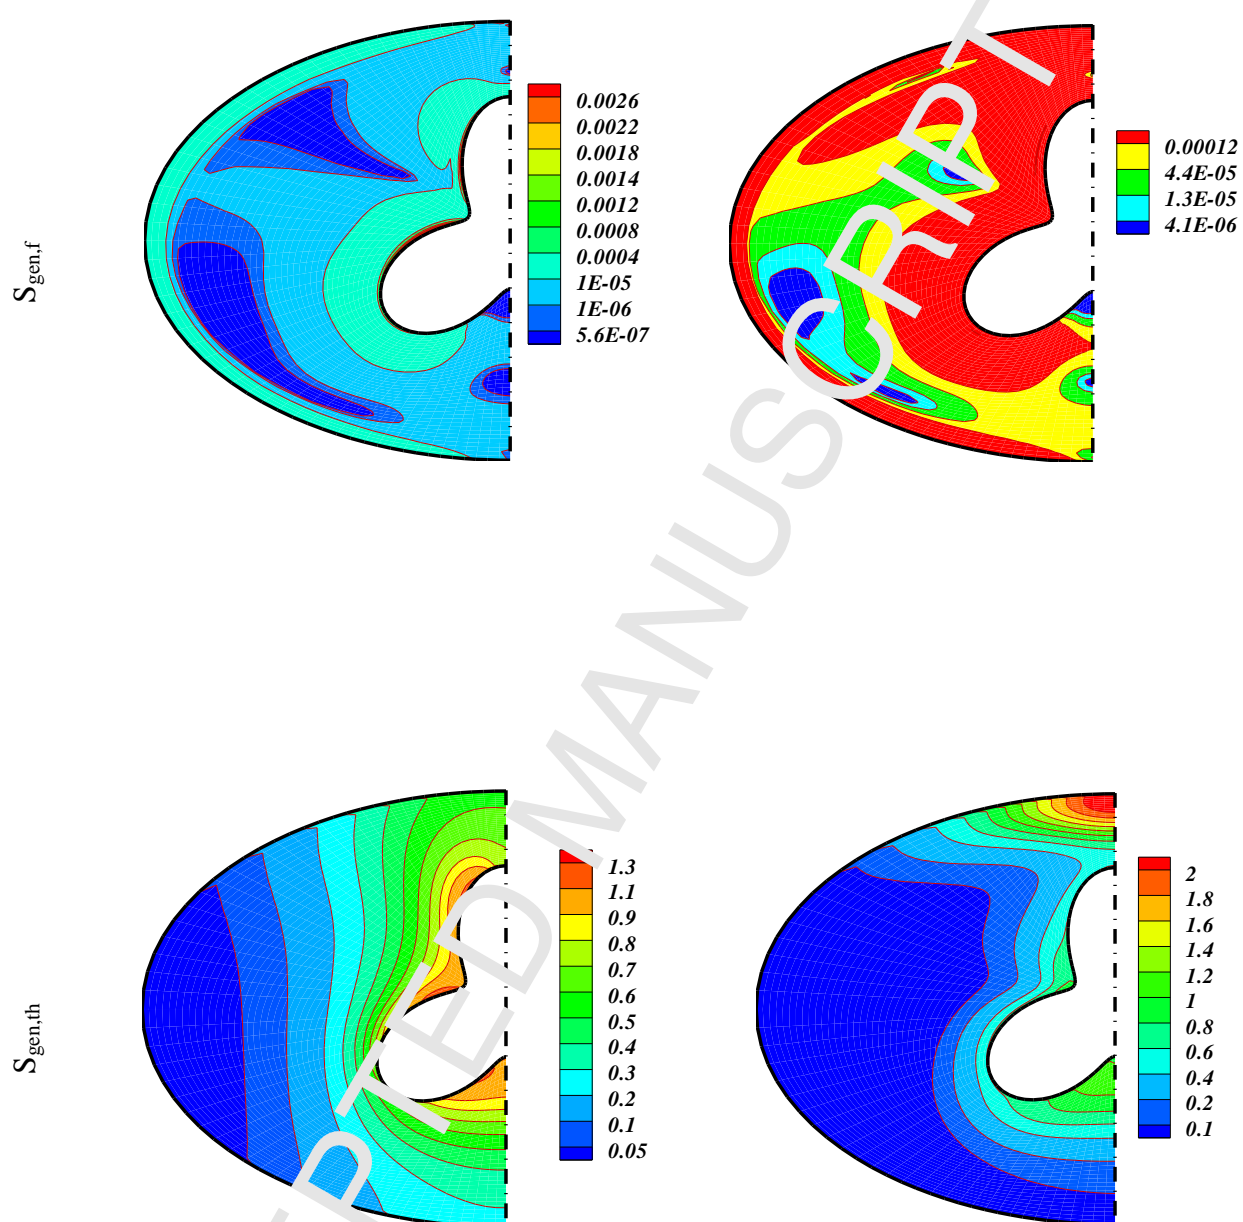
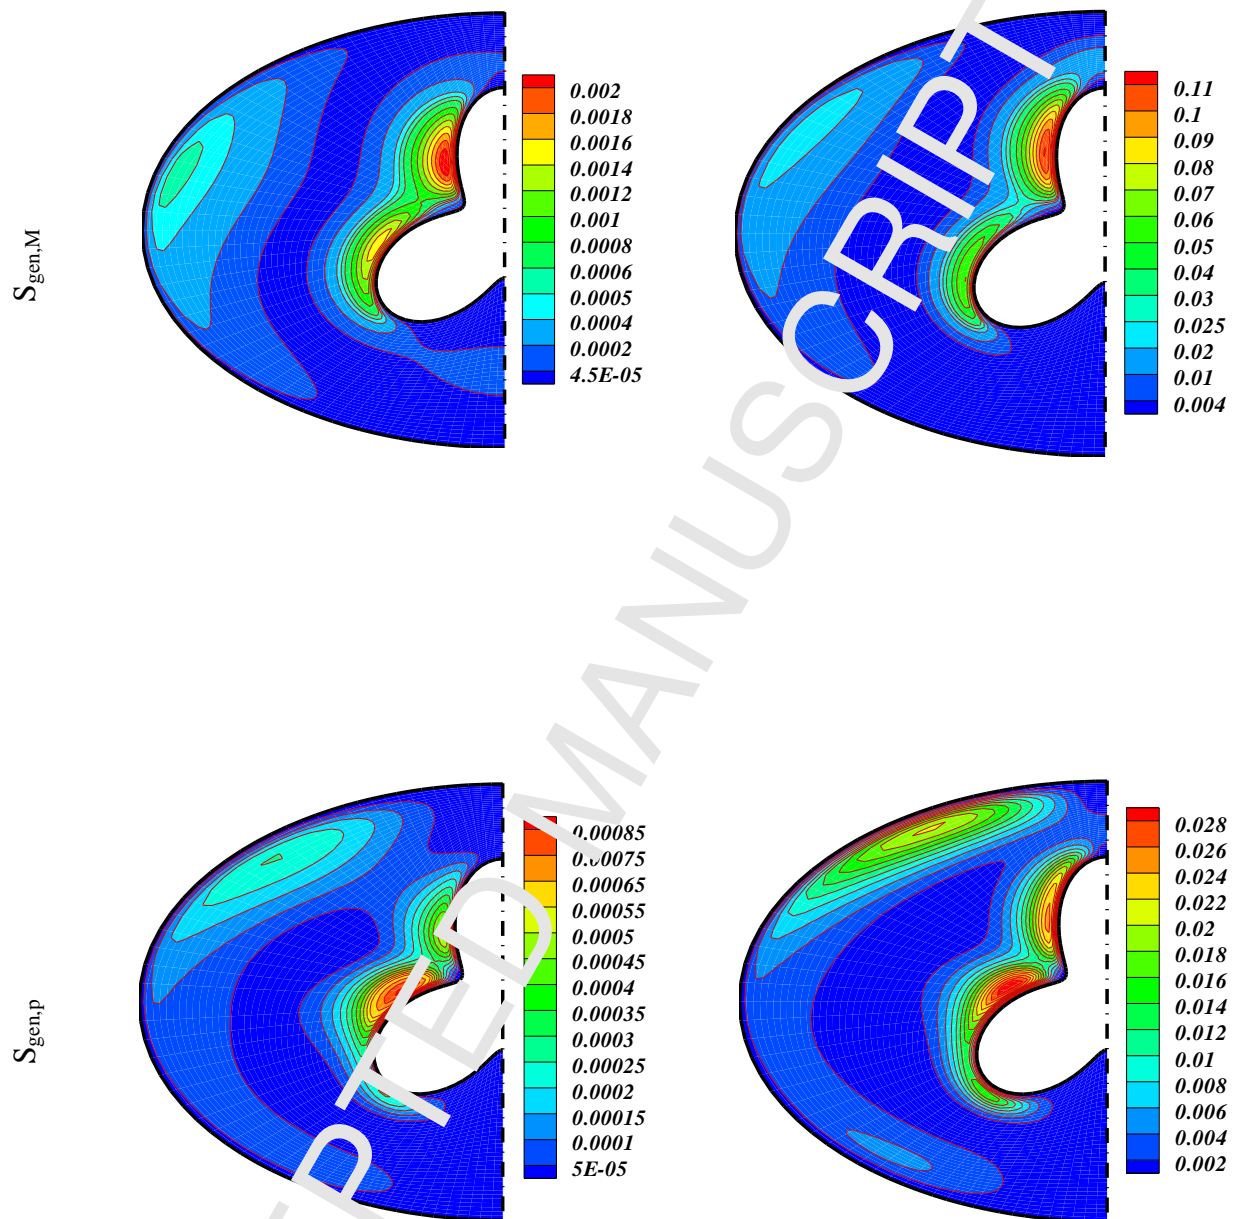


Fig. 2. Outputs for various  $Ra$  at  $\phi = 0.04$ ,  $Ha = 1$ ,  $Da = 0.01$







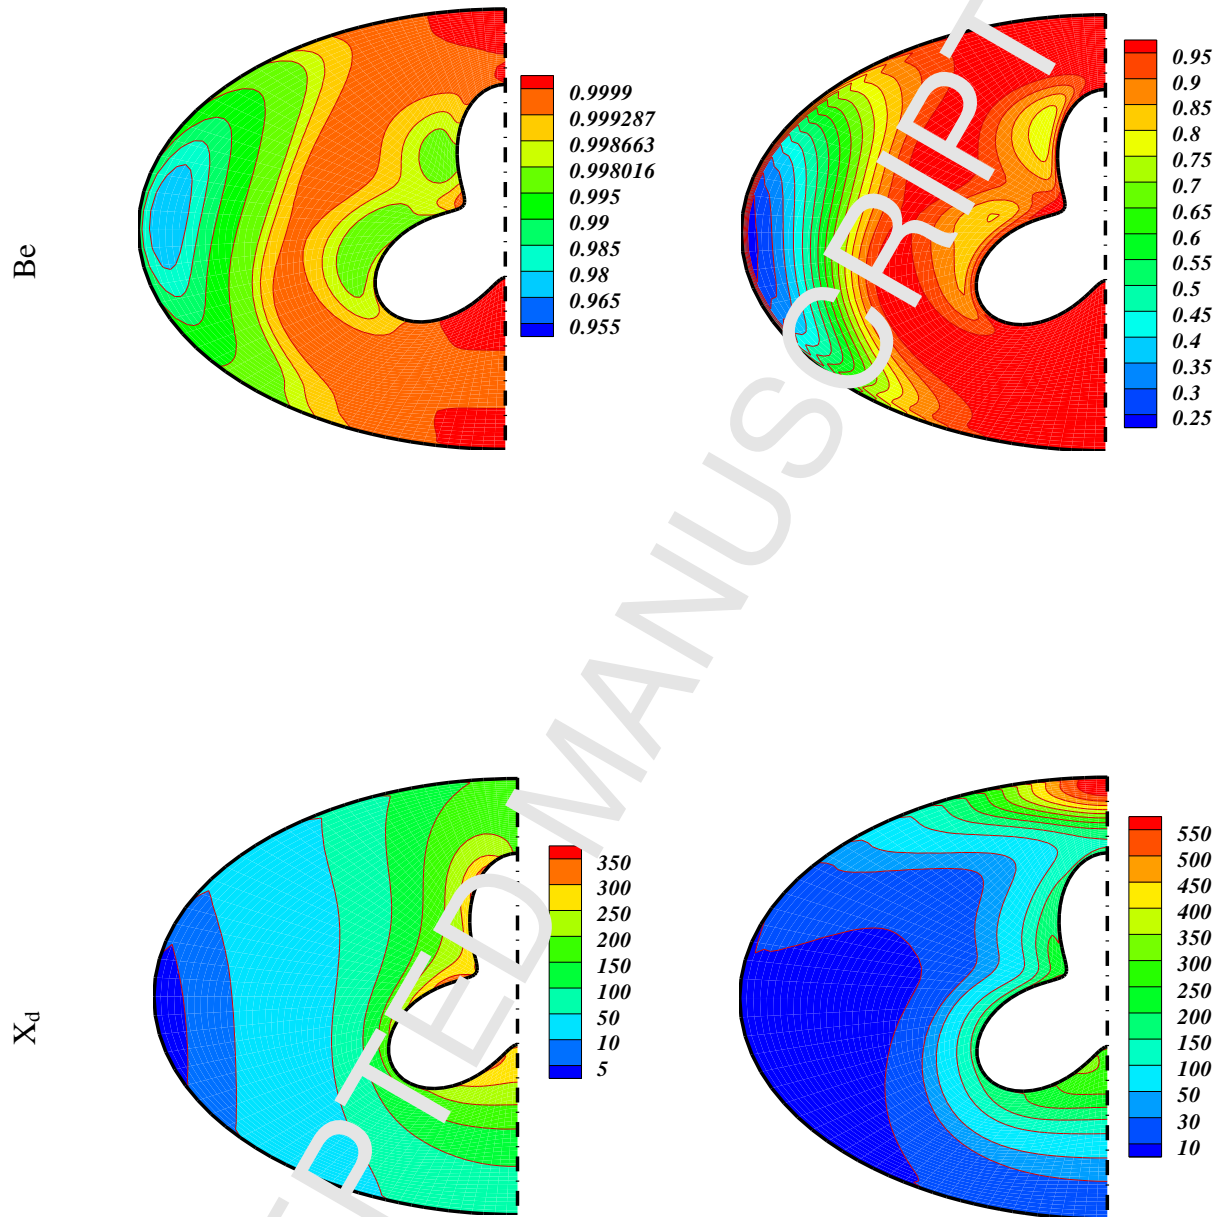
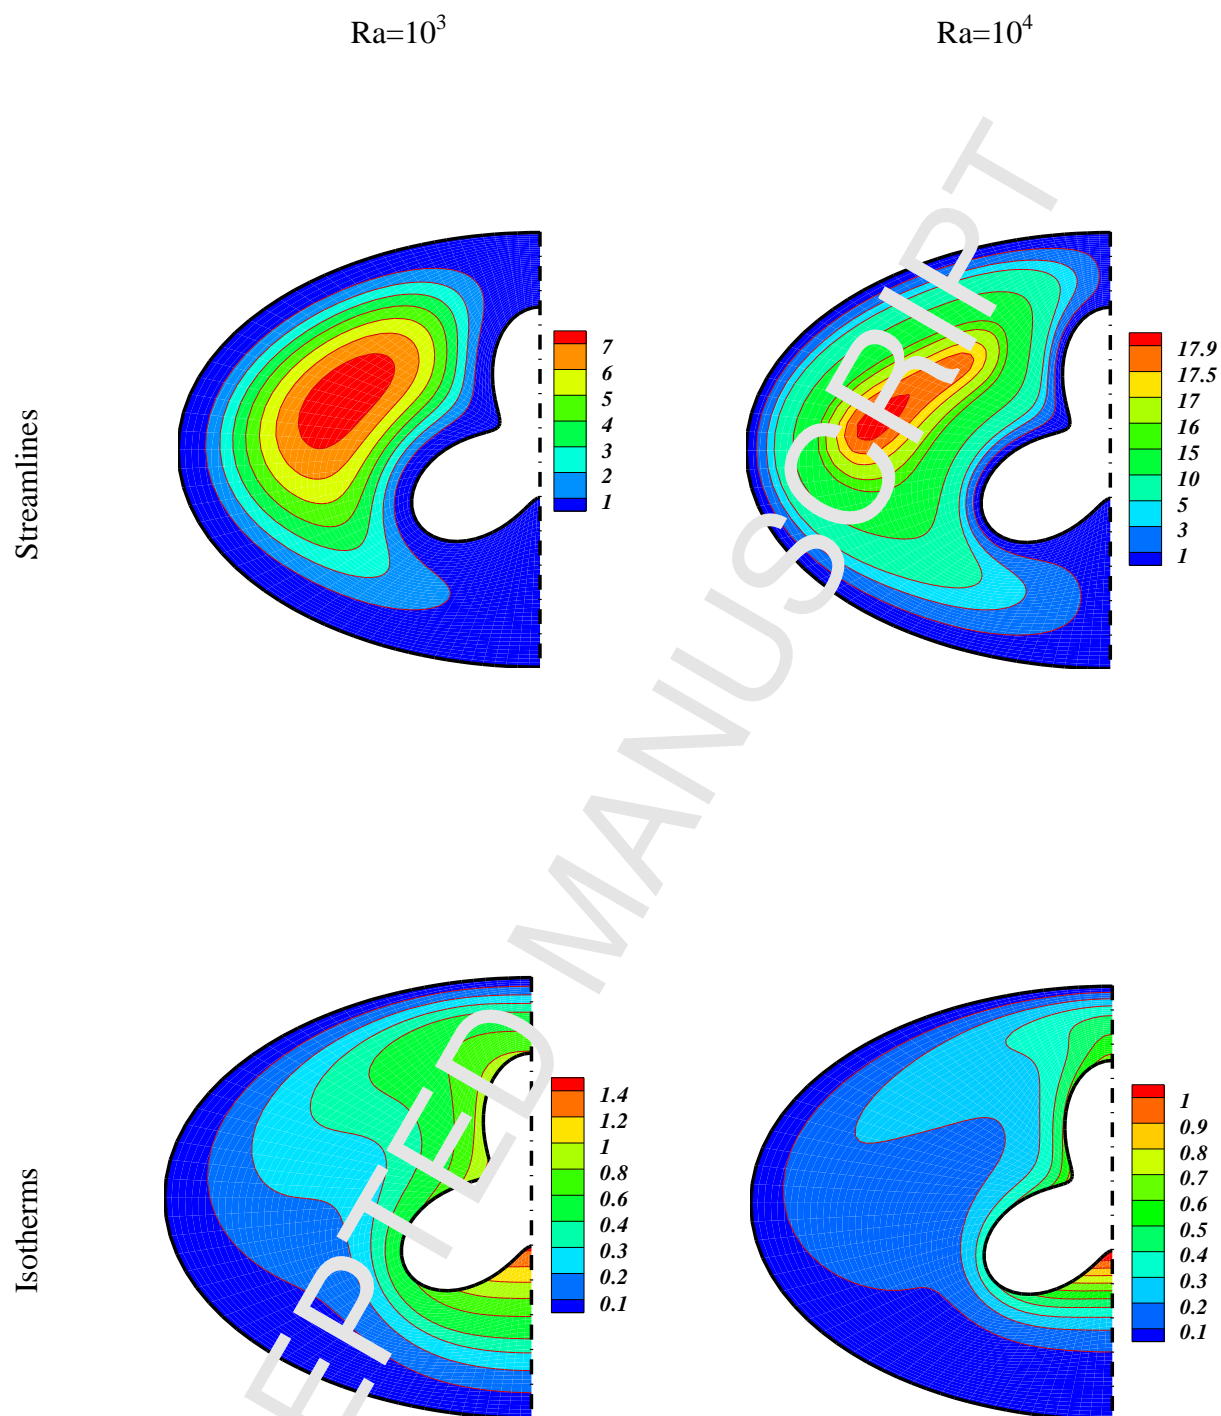
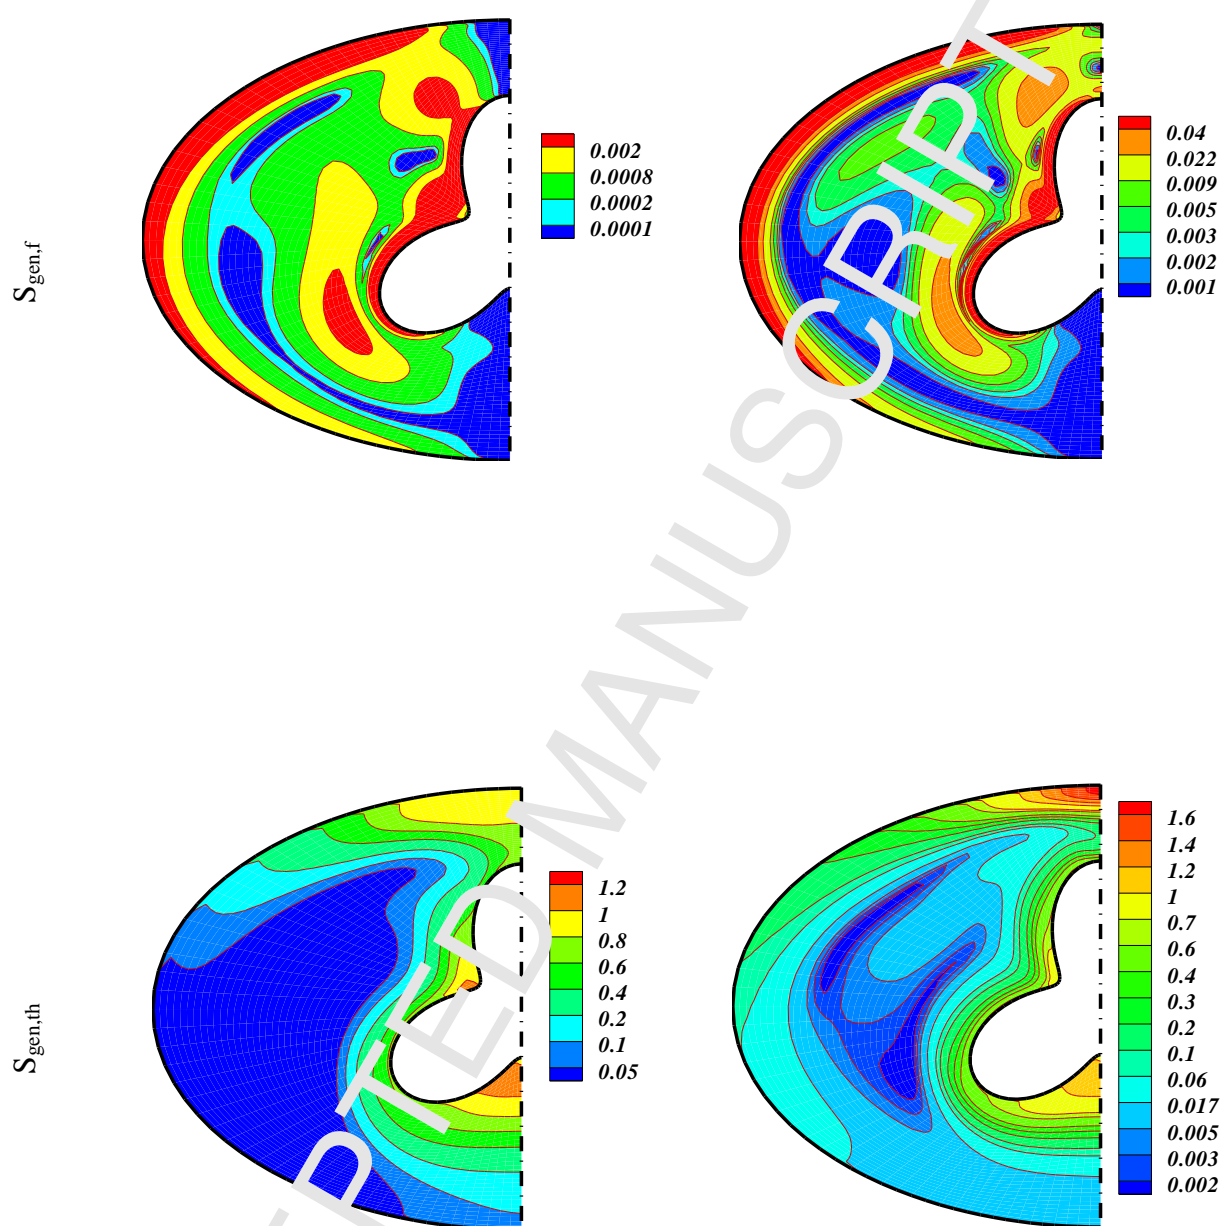
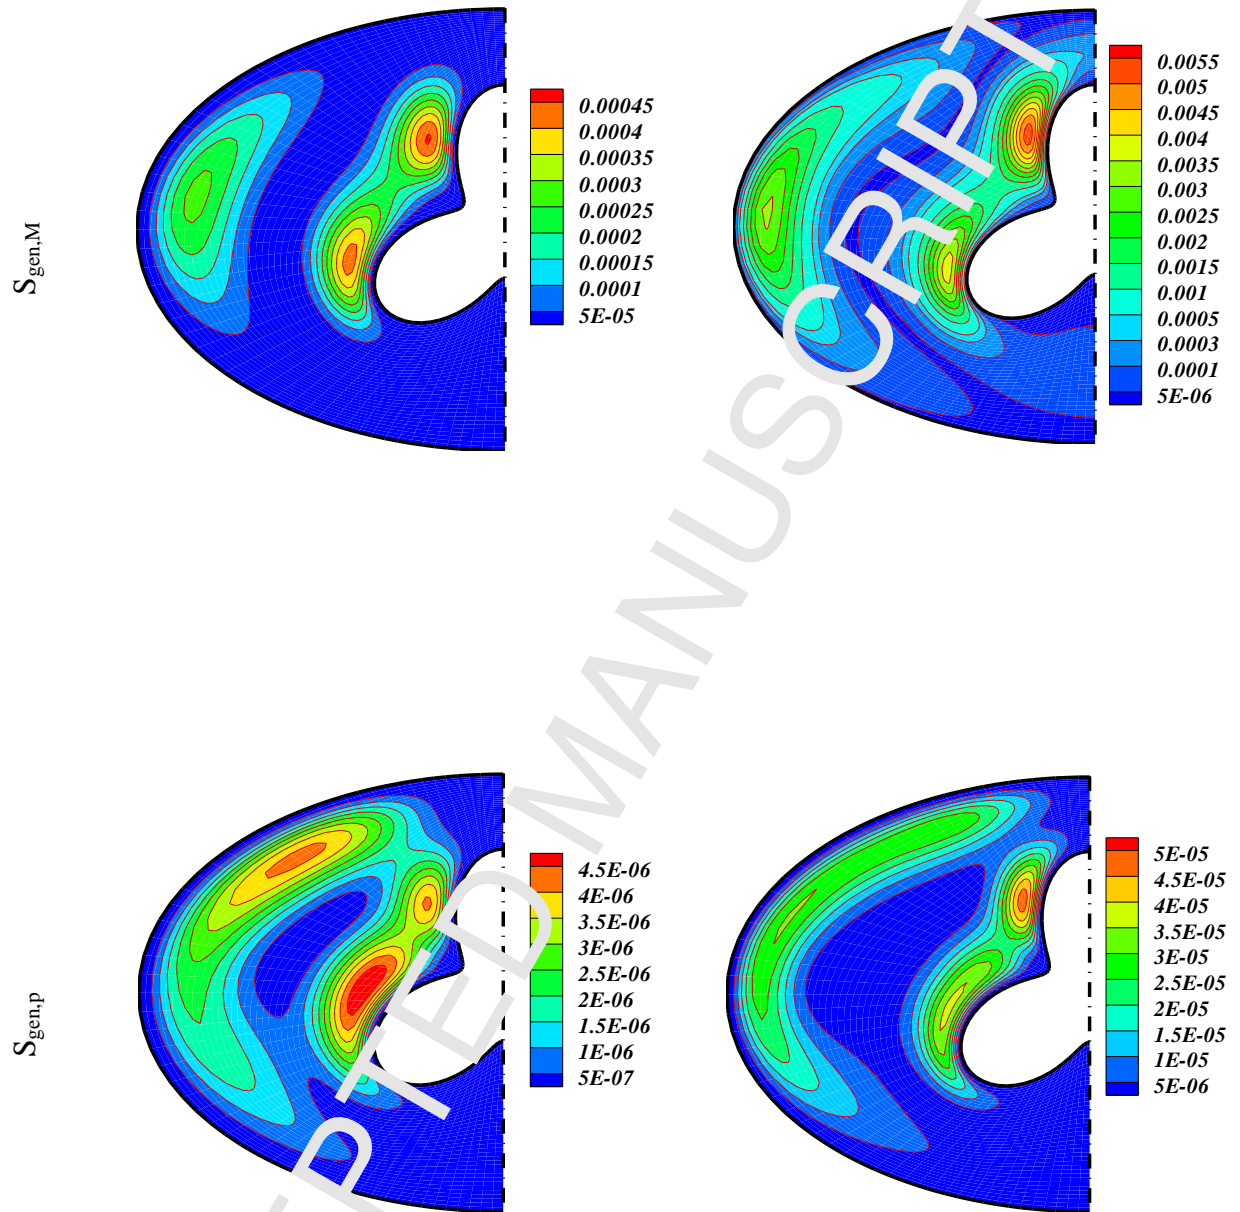


Fig. 3. Outputs for various  $Ra$  at  $\phi=0.04, Ha=20, Da=0.01$











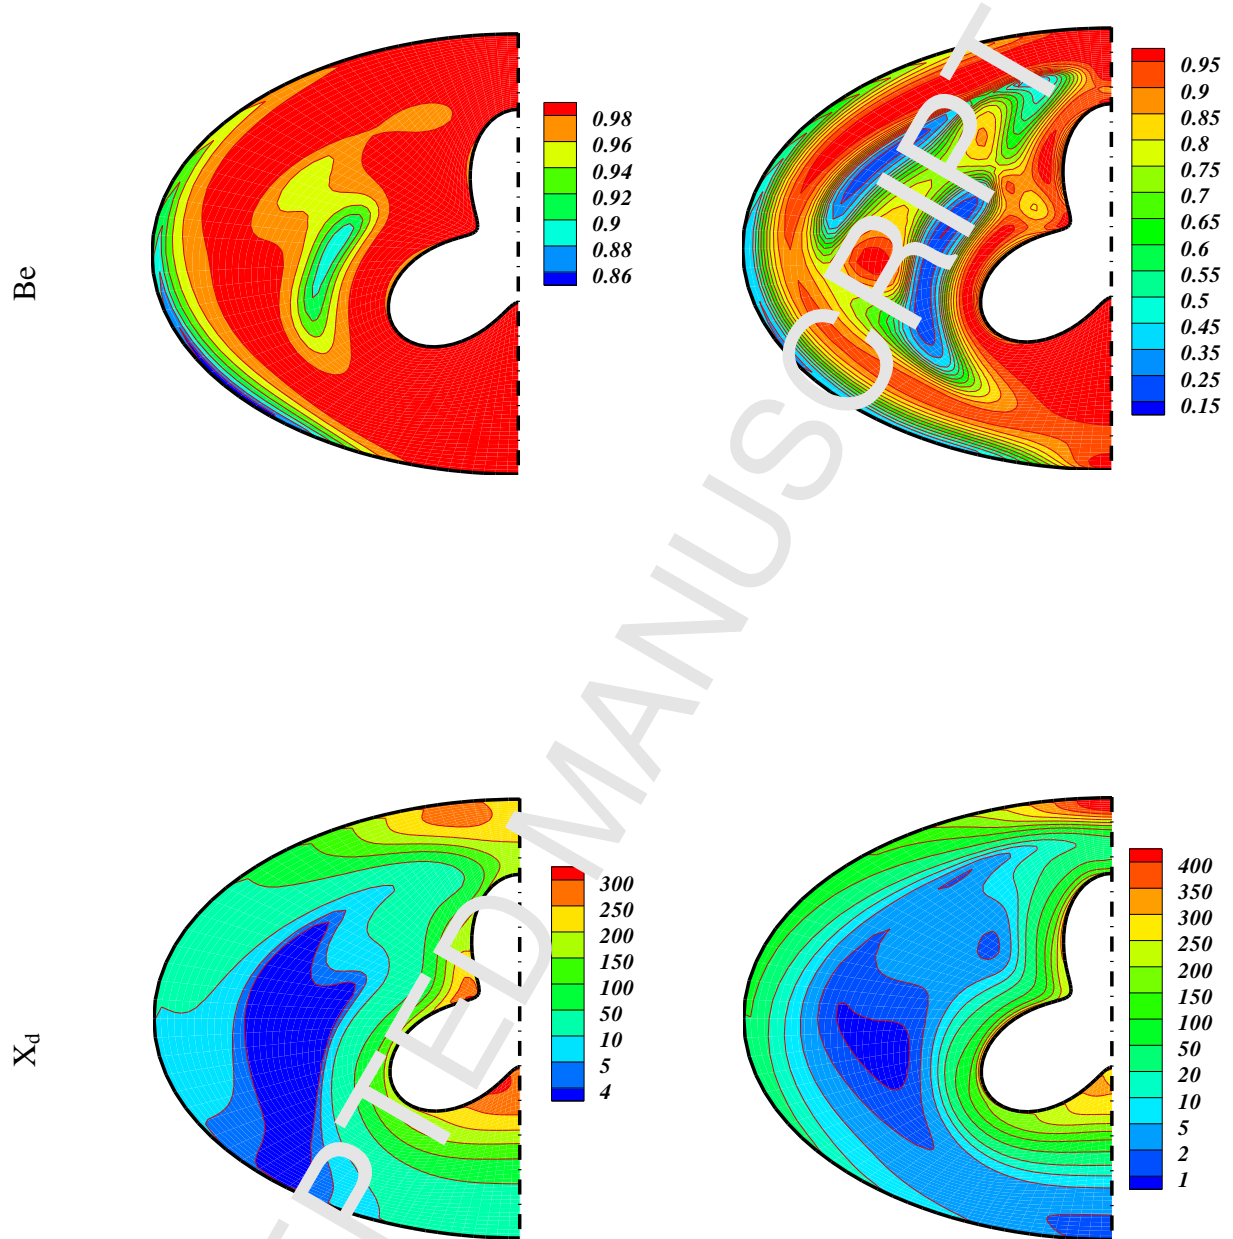
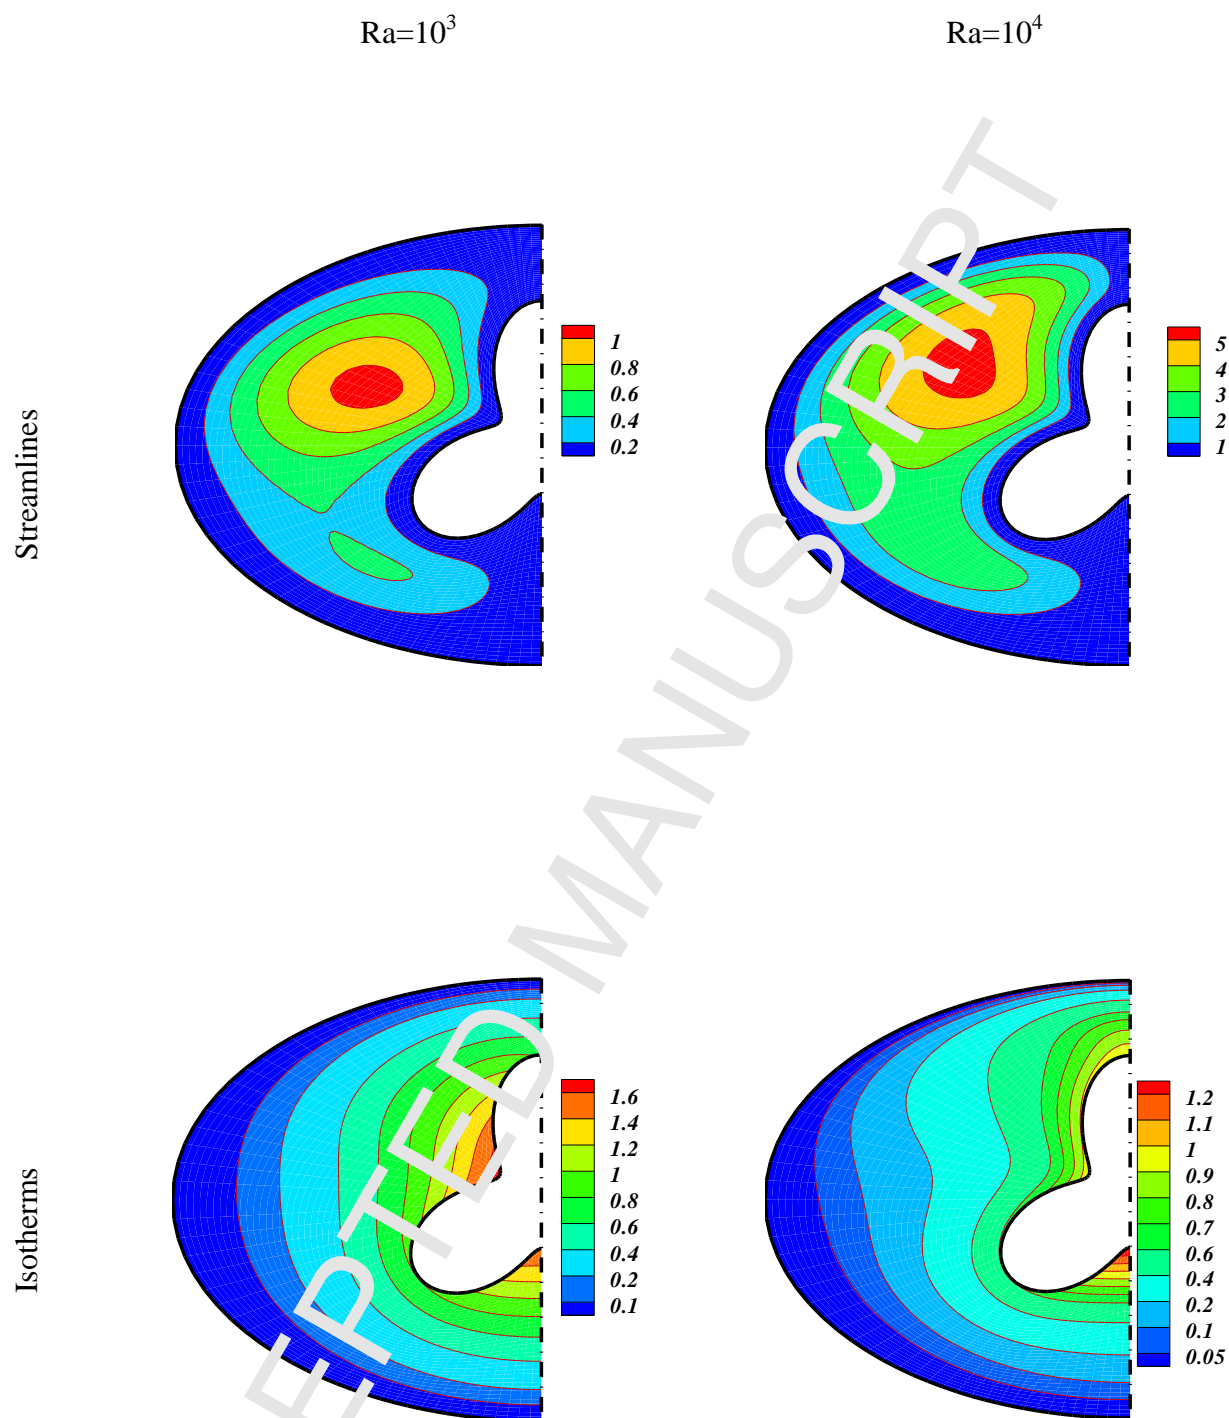
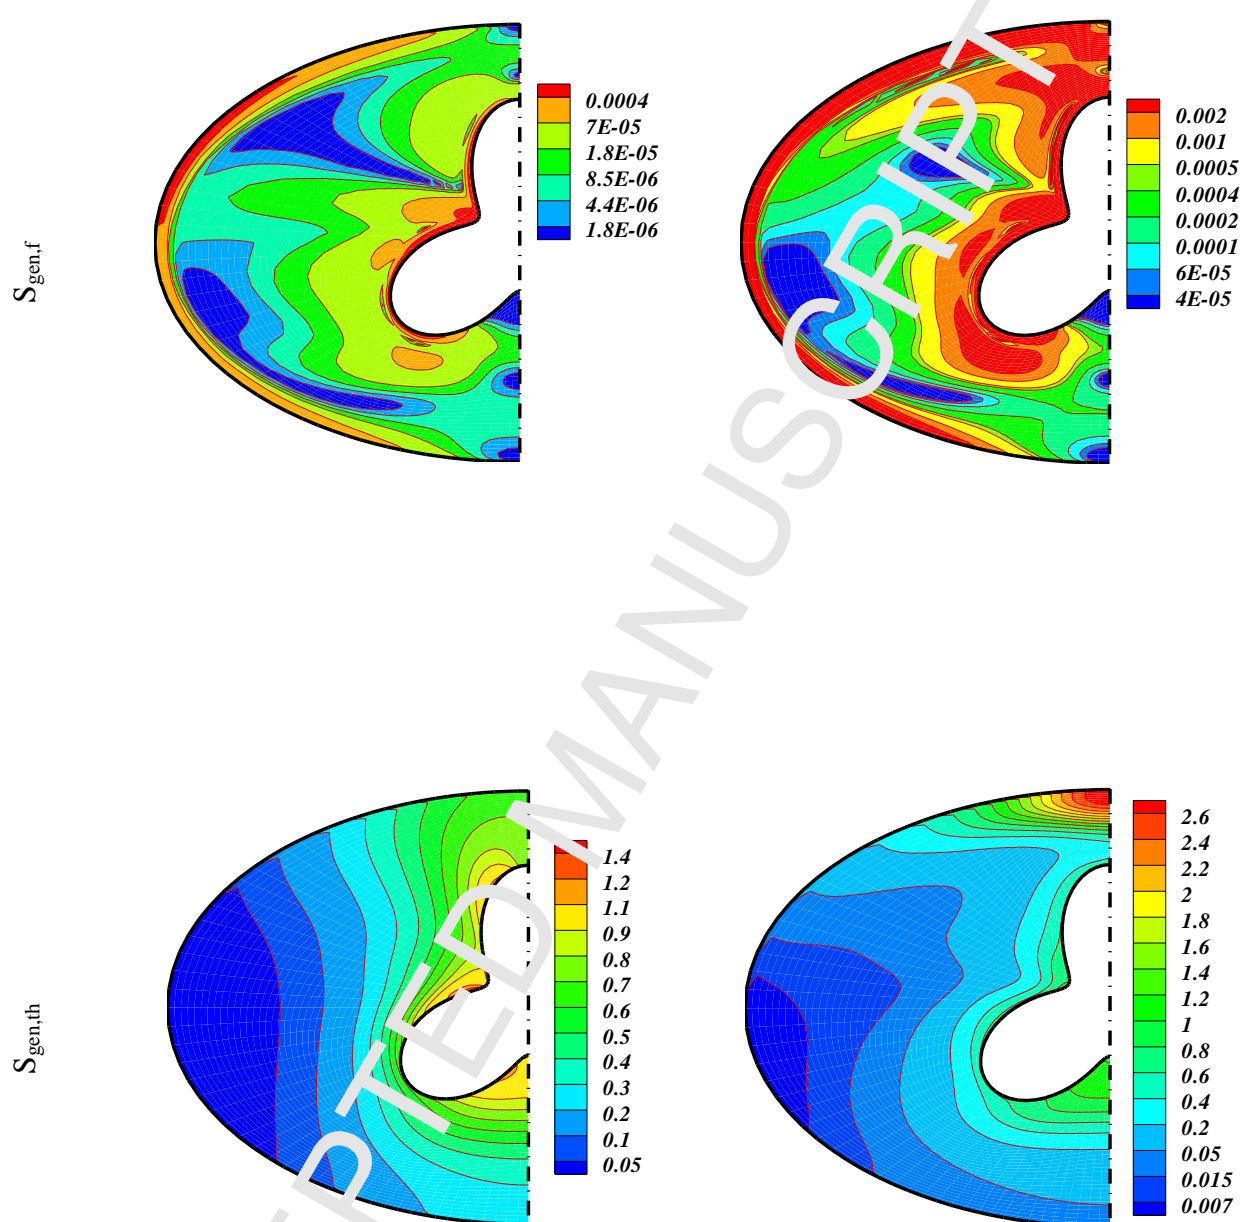
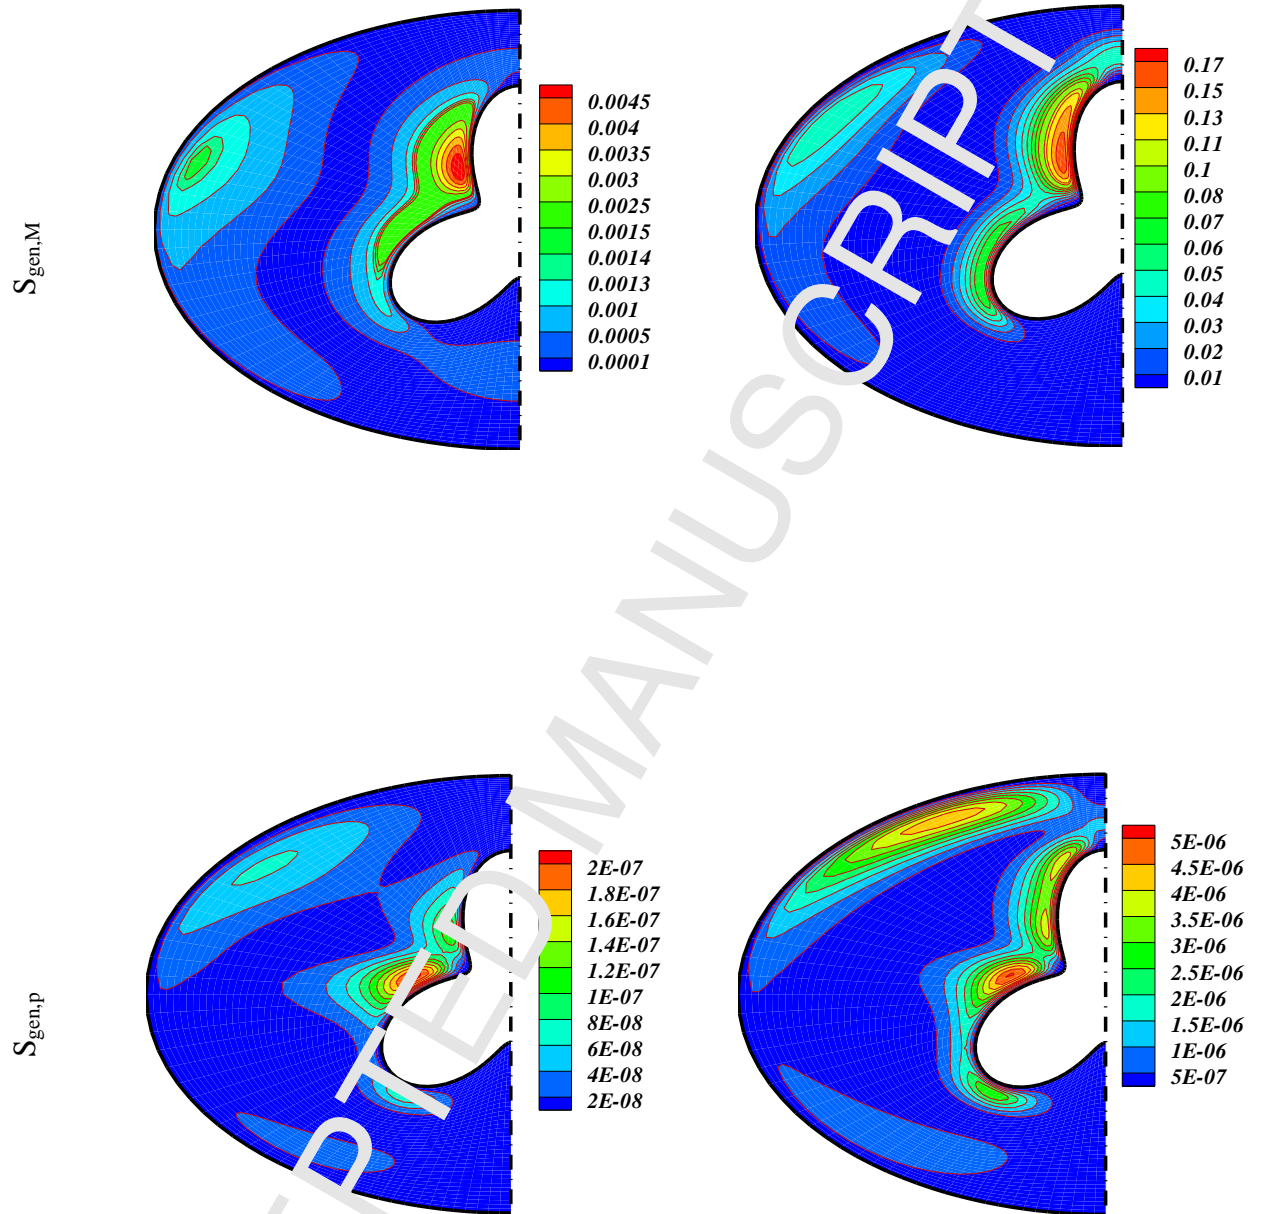


Fig. 4. Outputs for various  $Ra$  at  $\phi=0.04, Ha=1, Da=100$









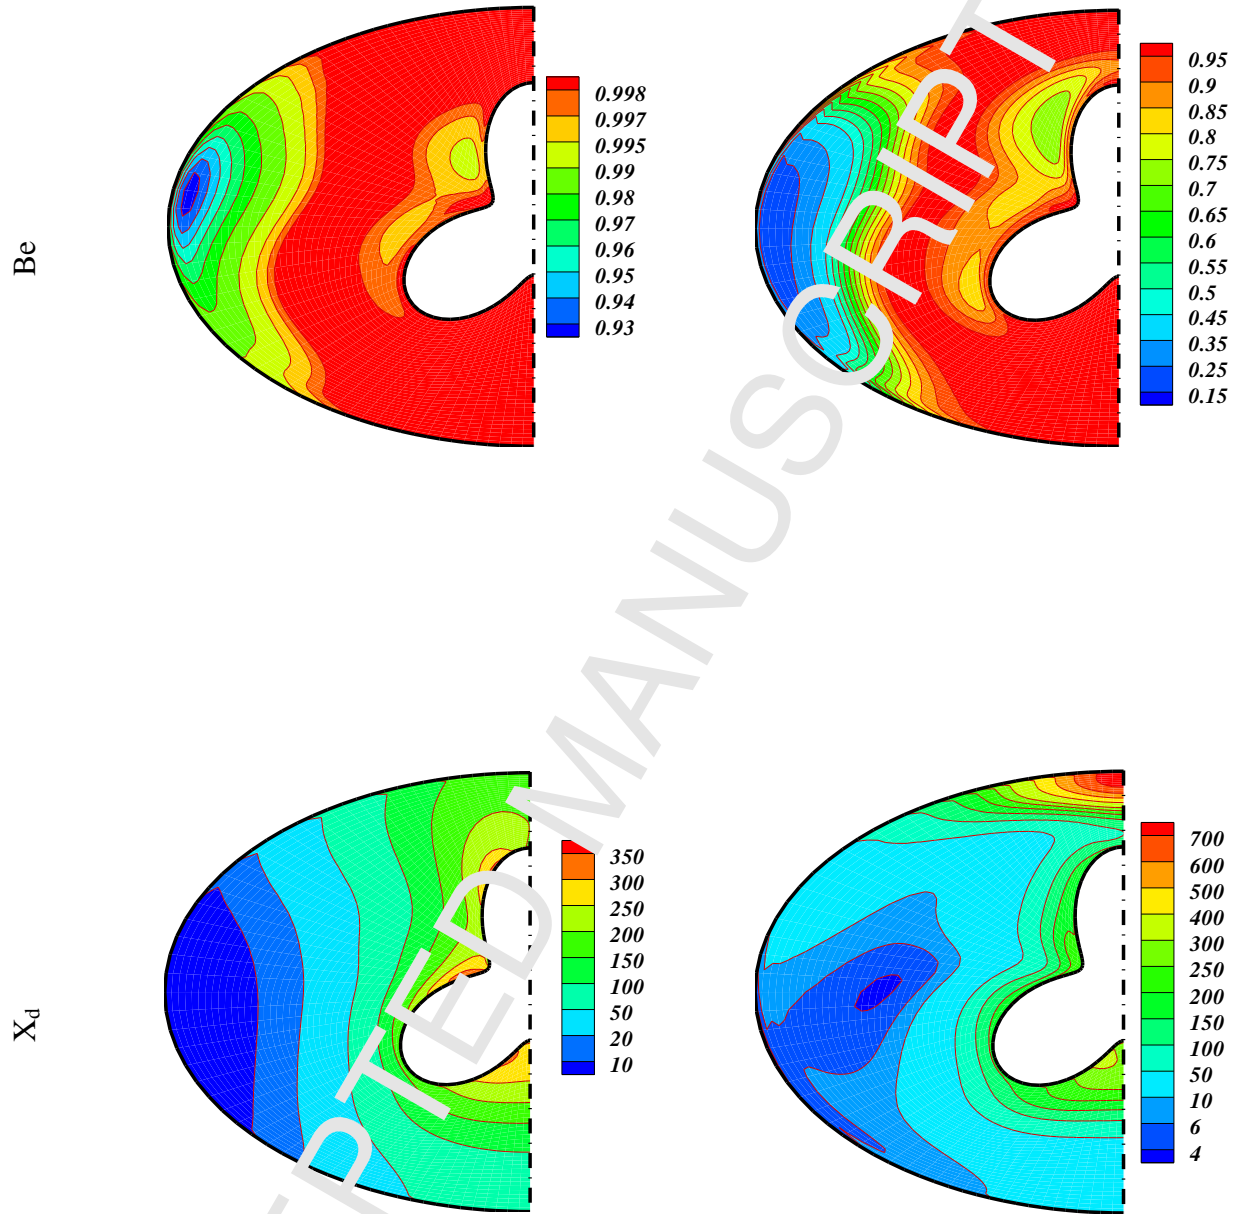


Fig. 5. Outputs for various  $Ra$  at  $\phi=0.04$ ,  $Ha=20$ ,  $Da=100$




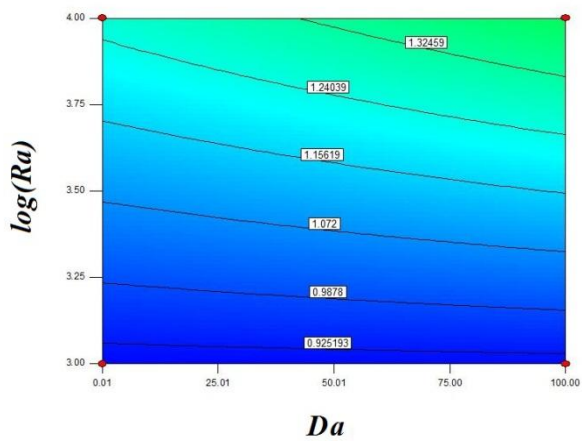


$Ha = 5$

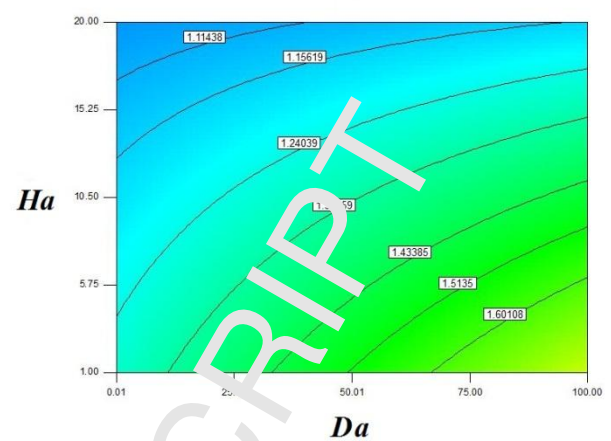


$\log(Ra) = 3.5$

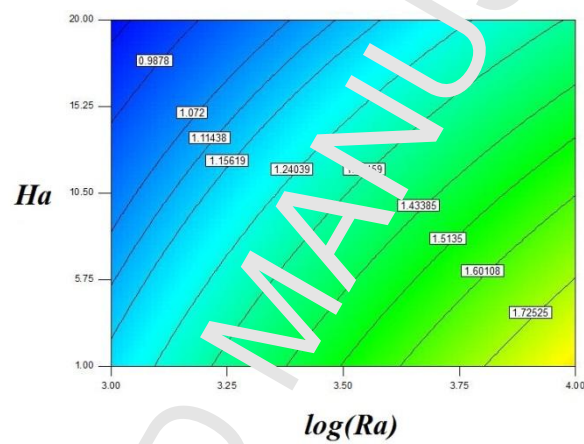

$Da = 50$

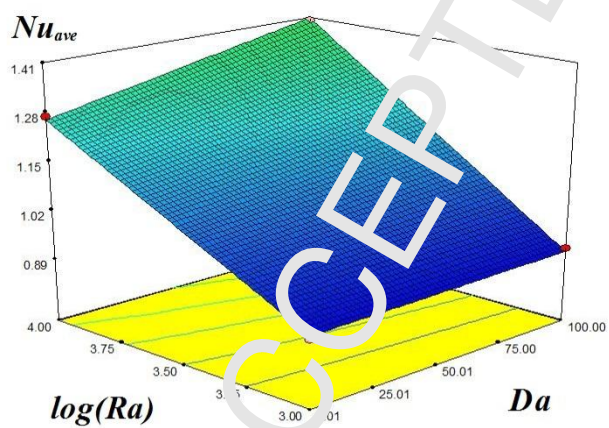

$Ha = 5$

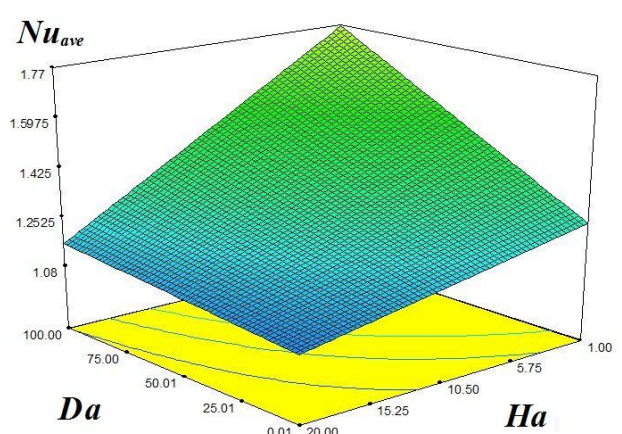

$\log(Ra) = 3.5$



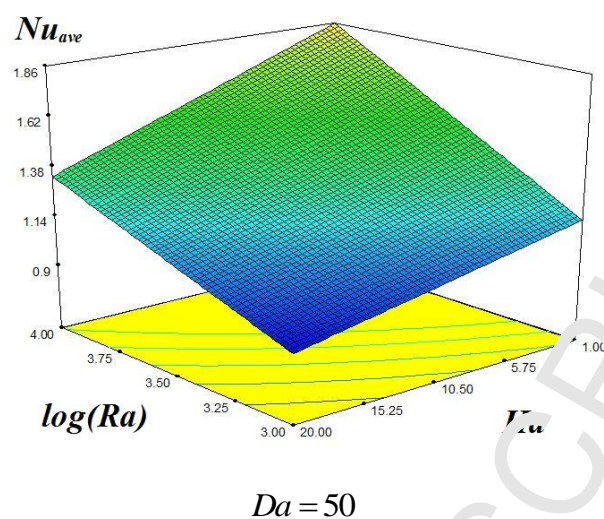



Fig. 6. Values of  $Nu_{ave}$  for various  $Pr, Ha, Da$

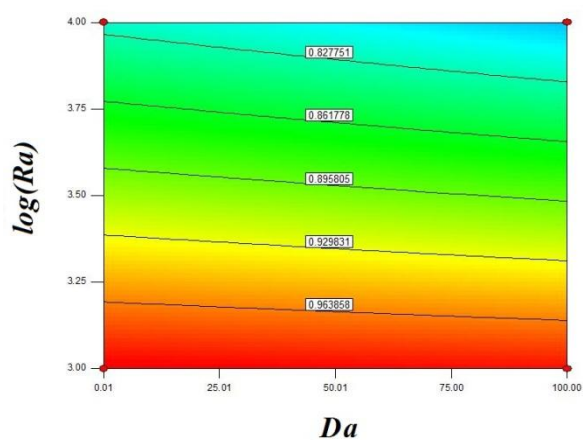


$Ha = 5$

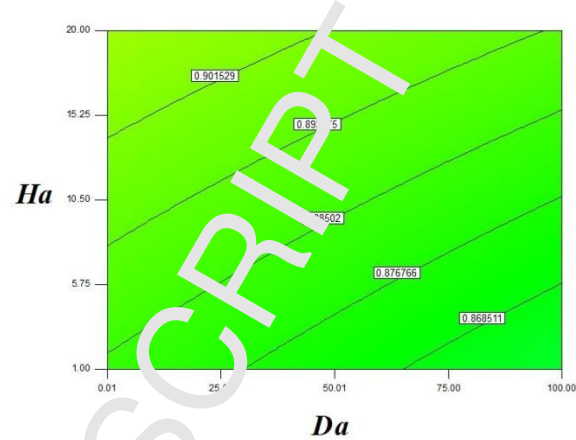


$\log(Ra) = 3.5$

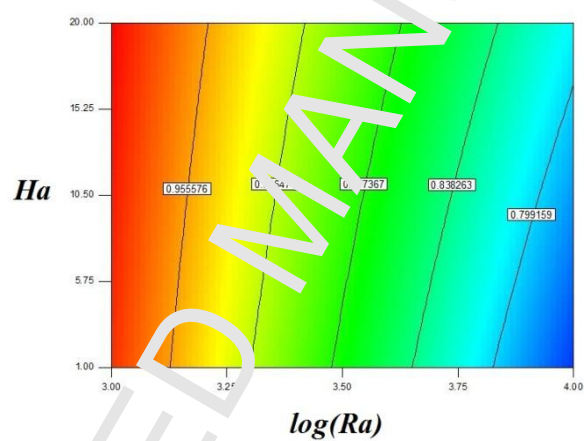

$Da = 50$

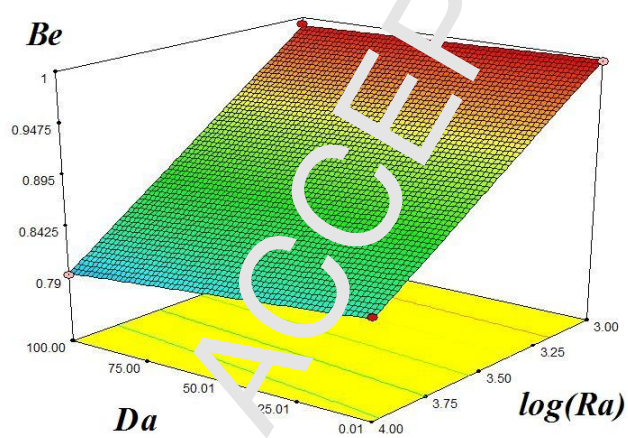


$Ha = 5$

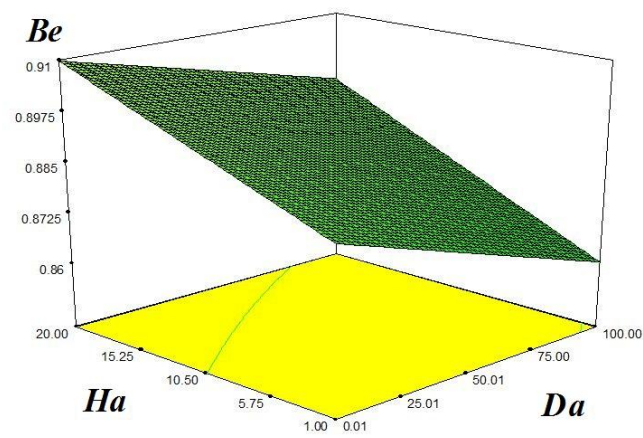


$\log(Ra) = 3.5$



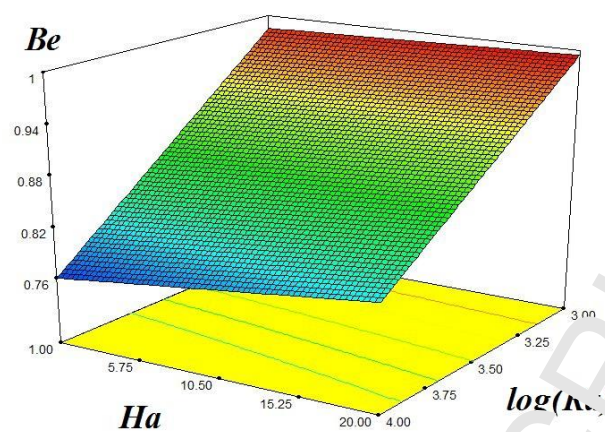


$$Da = 50$$


Fig. 7. Values of  $Be$  for various  $\kappa_s$ ,  $Ha$ ,  $Da$

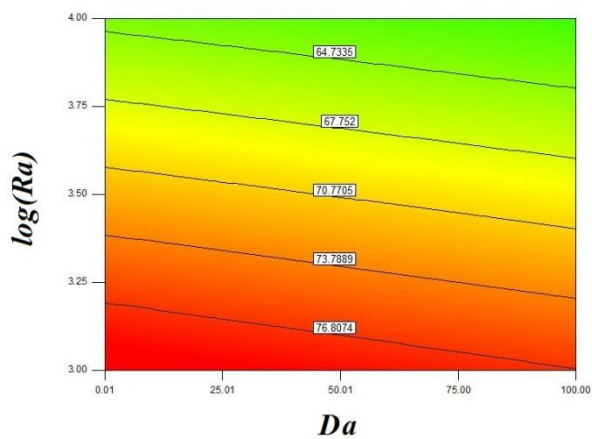


$Ha = 5$

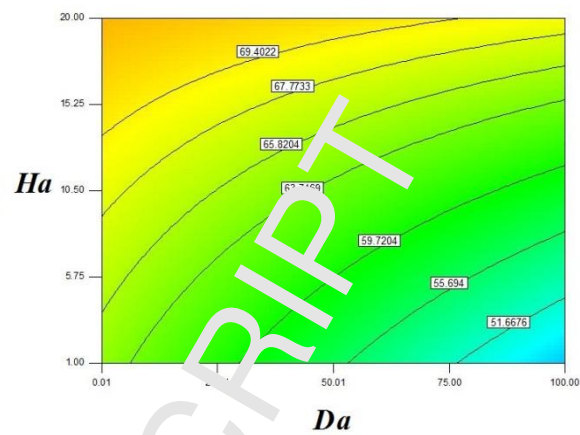


$\log(Ra) = 3.5$

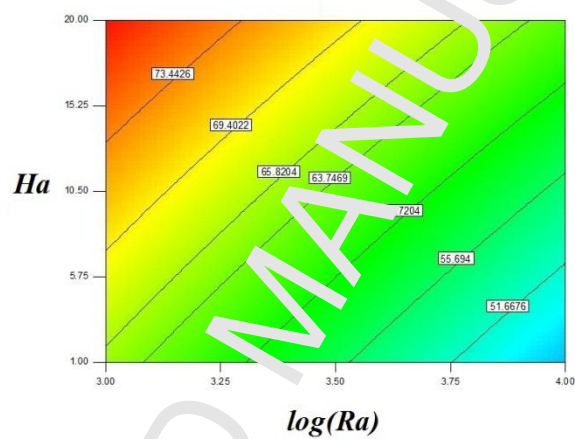


$Da = 50$

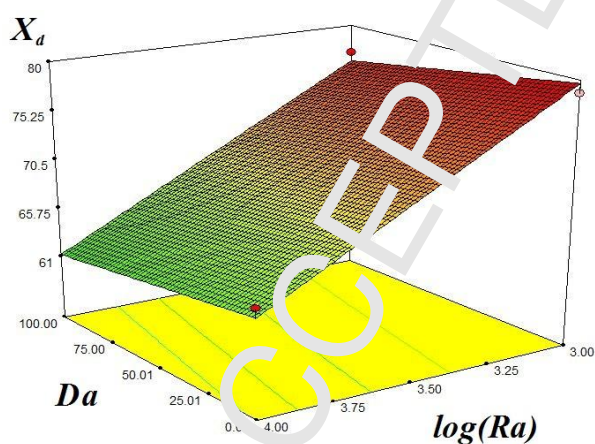

$Ha = 5$

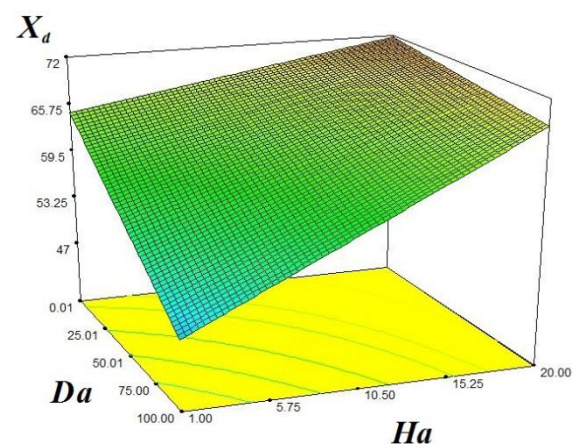

$\log(Ra) = 3.5$

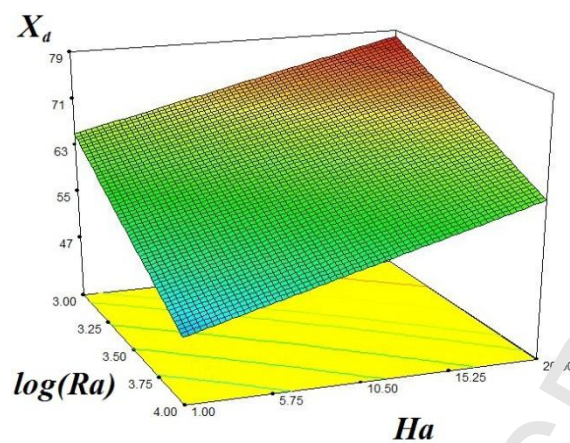

$$Da = 50$$

Fig. 8. Values of  $X_d$  for various  $Ra$ ,  $Ha$ ,  $Da$

Table1. Features of H<sub>2</sub>O and iron oxide

	Pure water	$Fe_3O_4$
$\sigma (\Omega \cdot m)^{-1}$	0.05	25000
$\beta \times 10^5 (K^{-1})$	21	1.2
$k (W / m.k)$	0.613	6
$C_p (j / kgk)$	4179	670
$\rho (kg / m^3)$	997.1	5200

Table2. Various grids and obtained  $Nu_{ave}$  at  $Da = 100, Ha = 1, Ra = 10^4$  and  $\phi = 0.04$ .

$51 \times 151$	$71 \times 211$	
2.12102	2.15137	$91 \times 271$
$61 \times 181$	$81 \times 241$	2.15804
2.14914	2.15365	

Table3. Comparison of current outputs with benchmark [30] at  $Pr=0.7$ .

	$Ra = 10^3$	$Ra = 10^4$	$Ra = 10^5$
De Vahl Davis [30]	1.118	2.243	4.519
Present	1.1432	2.2749	4.5199