Aalborg University

DENMARK

Physical Modeling Modular Boxes: PHOXES

Gelineck, Steven; Serafin, Stefania

Published in:
The fifth International Workshop on Haptic and Audio Interaction Design (HAID)

Publication date:
2010

Document Version
Early version, also known as pre-print

Link to publication from Aalborg University

Physical Modeling Modular Boxes: PHOXES

Steven Gelineck

Aalborg University Copenhagen, Department of
Architecture, Design and Media Technology
Lautrupvang 15, DK-2750
stg@media.aau.dk

Stefania Serafin

Aalborg University Copenhagen, Department of
Architecture, Design and Media Technology
Lautrupvang 15, DK-2750
sts@media.aau.dk

ABSTRACT

This paper presents the development of a set of musical
instruments, which are based on known physical modeling
sound synthesis techniques. The instruments are modular,
meaning that they can be combined in various ways. This
makes it possible to experiment with physical interaction
and sonic exploration, thereby possibly extending the
potential of the physical models.

Author Keywords

Physical Modeling, Physical Interfaces, Musical
Instruments, Exploration, Creativity, Electronic Music.

ACM Classification Keywords

H5.5. Sound and Music Computing: Modeling. H.5.2 User
Interfaces: Input devices and strategies. H.1.2
User/Machine Systems: Human Factors.

INTRODUCTION

The PHOXES modular instruments have been developed in
order to investigate what happens when physical modeling
sound synthesis algorithms are controlled in an
environment, which encourages creativity and exploration.
The physical control of the models plays a large part in how
the sonic potential of the models is perceived – on both a
lower level (e.g. which physical gesture must the user
perform to excite a certain model?) and on a higher level
(e.g. how do different control structures let users explore
the sonic potential of the models?).

In order to investigate the impact of the higher level control
structures a set of modular electronic instruments have been
developed. The goal has been to extend the creative use of
physical modeling sound synthesis by focusing on
exploration. The HCI research area that deals with
creativity support tools suggests that in order to support the
kind of exploration that is crucial for creative work, one
must design for *low threshold, high ceiling, and wide walls*
[1]. In other words there must be a balance between how
intuitive the system is *(low threshold),* how powerful it is
(high ceiling) and how well it encourages exploration,
letting users keep finding new ways of combining /con-
trolling elements or movements *(wide walls)*.

The proposed system tries to balance the intuitive causality
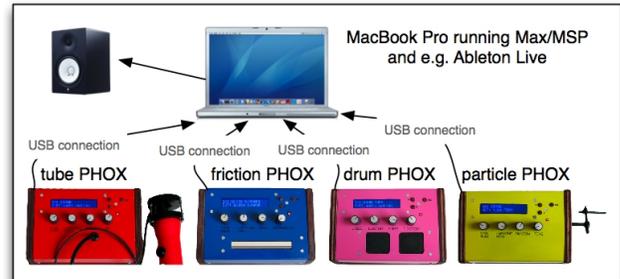inherent in the physical modeling technique with a flexible

**Figure 1. The PHOXES send control data through
USB to Max/MSP, which is rewired to the DAW of
your choice – e.g.Ableton Live.**

exploratory system that provides freedom within the
boundaries of the individual elements (each PHOX acts as
an instrument on its own and is naturally constrained, but
because they can be combined in a modular fashion, they
also provide the sense of freedom).

PHOXES MODULAR SYSTEM

At present time four PHOXES have been developed: tube
PHOX, particle PHOX, friction PHOX, and drum PHOX.
Each PHOX implements a different physical model and
consists of a unique excitation controller, intended to
naturally relate to that model. For instance, the tube PHOX
implements a physical model of a tube and a flute-like
excitation controller. Each PHOX also consists of four
knobs for adjusting model parameters, three buttons for
controlling the mapping involved in combining the
PHOXES and an LCD screen for displaying mapping
settings. We felt that it was important that all input/output
functionality was built into the PHOXES themselves so
focus could remain solely on the instruments while
exploring them (as apposed to also focussing on controlling
some parts using a laptop).

The physical models are written as Max/MSP[1] externals and
the system is developed in the Max/MSP environment. The
idea is that the PHOXES are powered through Max/MSP
but the sound is rewired to for instance Ableton Live or
Logic so eventual test subjects can explore the PHOXES'
potential in a familiar environment. Inputs and outputs from
the PHOXES are handled by a PhidgetTextLCD with
PhidgetInterfaceKit 8/8/8[2] embedded in each of the

---

[1] a graphical programming language (http://cycling74.com/)

[2] from http://phidgets.com

1

PHOXES - See Figure 1 for an overview of the system.

Physical Models

The physical models which have been implemented present a variety in complexity, sonic fidelity, and physicality (the type of excitation gesture they naturally propose). The physical models used are:

- **tube PHOX** – turbulence model based on [2].

- **particle PHOX** – particle model based on Physically Informed Sonic Modeling (PhISM) [3].

- **friction PHOX** – friction model based on the elasto-plastic friction model [4].

- **drum PHOX** – drum model based on 2D waveguides [5].

Excitation Controllers

Each PHOX implements a physical controller, used to exert energy into the model. The controllers have been chosen to naturally extend the physical models they by default are connected to. The modularity of the PHOXES system then lets the user play around with exciting any of the physical models using any of the excitation controllers from the different PHOXES.

The excitation controllers used are listed below, together with the excitation gestures that they afford. They are all used to measure velocity, which is mapped to the amount of energy injected into the system.

- **tube PHOX** – flute controller implementing an amplified low pressure sensor (1INCH-D-4V from All Sensors). The user blows into a small tube attached to the sensor, which senses how hard the user blows, giving the user the feeling of blowing into something similar to a recorder.

- **particle PHOX** – crank attached to a multi-turn rotational potentiometer (Model 357 from Vishay). The user turns the crank to produce energy. The rotational speed is measured and used as excitation. The crank gives the user the capability of experimenting with both continuous and instantaneous excitation gestures.

- **friction PHOX** – friction slider implementing a ribbon sensor (SoftPot from Spectra Symbol). The sensor lets the user slide a finger back and forth on a horizontal flat surface. The velocity of the back and forth sliding gesture is measured and used as excitation.

- **drum PHOX** – two drum triggers implementing piezo transducers (PSG100 from Kingstate). The drum triggers detect the occurrence of a hit (finger tapping gesture) and the velocity of that hit.

Modularity

Two or more PHOXES can be combined by choosing how energy is put into any given PHOX. Energy can either come from an excitation controller (it is possible to use any of the available excitation controllers embedded in the PHOXES to control any of the physical models), or it can come from the sound produced by a different PHOX – similar to [6], where sound is used to drive the excitation mechanism of the physical models. This means that there are a couple of challenges when developing the physical models. Each of the models must 1) be able to respond to energy from different types of excitation gestures (continuous or instantaneous [7]) and 2) have a way of mapping sound to input energy.

When each PHOX is played on its own using its own excitation controller there is a natural mapping metaphor, which makes the relationship between gesture and sound intuitive and natural (for instance making squeaky friction sounds by sliding your finger back and forth, or making flute sounds by blowing into a tube). But the naturalness of the metaphors change when an excitation controller from one PHOX is used to excite a physical model from a different PHOX (when for instance using a crank to make flute sounds or when blowing a drum). Although unnatural, it seems that the mapping is still perceived as being intuitive. Because of the nature of physical modeling there is a natural causality relationship between the amount of energy you put in and the sound you get out. If the amount of energy does not change (only the gesture one uses to produce that energy changes), we believe that the mapping is intuitive. By presenting the user with a variety of physical gestures for controlling the same physical model, we open up for a physical, more embodied exploration of the sonic potential of the models.

Goto `http://media.aau.dk/~stg/phoxes/` for details about mapping, videos, pictures and additional development information.

CURRENT STATE AND FUTURE DEVELOPMENT

An early pre-test was conducted where an experienced electronic musician borrowed the PHOXES for a duration of 10 days – see Figure 2. The goals were 1) to get a first impression of how well the system encouraged exploration and whether the system was creatively inspiring and motivating, 2) to explore the evaluation methods involved in testing such a complex set of instruments in as natural an environment as possible, and 3) to see if the build and functionality of the PHOXES would withhold such a long test period without our interference. Further details about the test can be found in [8].

The early impressions have shown that in order for future test subjects to be able to use the PHOXES in their natural working environment (where they integrate them in their normal setup with mixers, effect-racks, other controllers,

Figure 2. User playing the PHOXES. Here he is playing the particle PHOX on its own. Energy is exerted into the model by rotating the crank.

computer running their favored DAW, etc.) improvements should be made to the efficiency of the code. Some of the synthesis models are quite computationally expensive and are currently run on the test subject's own computer. This means that it is not possible to run large DSP-heavy projects at the same time as playing the PHOXES. This puts an undesirable limit to the potential use of the PHOXES. We want the test subjects to be able to work on projects exactly the way they are used to, in order to see how the PHOXES integrate in a natural environment.

Another issue was that the test subject did not get to explore parts of the modular system. This might have had to do with the mapping functionality being presented in an overly complicated way or because the test period was not long enough, and the test subject simply did not get to some parts.

The pre-test also showed that the test subject was highly motivated and stimulated by the PHOXES. He especially noted the balance between the familiar form factor of the instruments (familiar to an electronic musician, that is) and the naturalness of the physical interaction. It made him feel like he was playing an acoustical instrument, but in an electronic music setting. He found the PHOXES very durable and easy to set up. He found the physicality of the controls very inspiring and lastly he said that the sounds they made were amazing.

Before conducting a larger scale longitudinal evaluation with more test subjects, improvements will be made to the PHOXES regarding computation and in the way that the combination mapping is controlled. Hopefully the large

scale evaluation can tell us if the success of the pre-test was a matter of novelty alone, or if developing for this kind of physical exploration does in fact improve the creative use of physical modeling sound synthesis.

REFERENCES

1. B. Shneiderman, G. Fischer, M. Czerwinski, M. Resnick, B. A. Myers, L. Candy, E. A. Edmonds, M. Eisenberg, E. Giaccardi, T. T. Hewett, P. Jennings, B. Kules, K. Nakakoji, J. F. Nunamaker, R. F. Pausch, T. Selker, E. Sylvan, and M. A. Terry, "Creativity support tools: Report from a u.s. national science foundation sponsored workshop," *International Journal of Human Computer Interaction*, vol. 20, no. 2, pp. 61–77, 2006.

2. P. Cook, "A Meta-Wind-Instrument Physical Model and a Meta-Controller for Real Time Performance Control," in *Proceedings of the International Computer Music Conference*, pp. 273–276, San Francisco, California: International Computer Music Association, 1992.

3. P. Cook, "Physically Informed Sonic Modeling (PhISM): Synthesis of Percussive Sounds," *Computer Music Journal*, vol. 21, no. 3, pp. 38–49, 1997.

4. F. Avanzini, S. Serafin, and D. Rocchesso, "Modeling interactions between rubbed dry surfaces using an elasto-plastic friction model," in *Proceedings of the International Conference on Digital Audio Effects,* (Hamburg), pp. 111–116, DAFX, 2002.

5. S. A. V. Duyne and J. O. Smith, "Physical modeling with the 2-d digital waveguide mesh," in *Proceedings of the International Computer Music Conference,* pp. 40–47, San Francisco, California: International Computer Music Association, 1993.

6. S. Gelineck and S. Serafin, "A practical approach towards an exploratory framework for physical modeling," *Computer Music Journal*, vol. 34, no. 2, 2010

7. C. Cadoz, "Instrumental Gesture and Musical Composition," in *Proceedings of the International Computer Music Conference,* pp. 1-12, San Francisco, California: International Computer Music Association, 1998.

8. S. Gelineck and S. Serafin, "PHOXES – Modular Electronic Music Instruments Based on Physical Modeling Sound Synthesis," in *Proceedings of the 7th Sound and Music Computing Conference,* Barcelona, Spain, 2010.