Aalborg Universitet



# Climate projection of rainfall series for design and analysis of urban drainage systems

Thorndahl, Søren Liedtke; Andersen, Christoffer Bang; Simonsen, Preben Dam; Kraglund, Lene Lykke ; Boberg, Fredrik ; Duus, Lene Bassø

Creative Commons License Unspecified

Publication date: 2021

Document Version Publisher's PDF, also known as Version of record

Link to publication from Aalborg University

Citation for published version (APA):

Thorndahl, S. L., Andersen, C. B., Simonsen, P. D., Kraglund, L. L., Boberg, F., & Duus, L. B. (2021). *Climate projection of rainfall series for design and analysis of urban drainage systems*. Poster presented at IWA Digital World Water Congress.

# General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain You may freely distribute the URL identifying the publication in the public portal -

# Take down policy

If you believe that this document breaches copyright please contact us at vbn@aub.aau.dk providing details, and we will remove access to the work immediately and investigate your claim.



# **Project: KLIMAKS**

# Abstract

A novel method to develop continuous rainfall series for urban drainage system design and analysis is proposed, evaluated and demonstrated. The method is used to stochastically replicate historical rain series statistically as well as climate project rain series to represent specific climate scenarios and projection times. Continuous climate projected rainfall series are a crucial necessity for designing complex drainage systems and climate adaption solutions robustly for future loading as well as evaluating impacts of climate changes on the urban hydrological cycle.

# **Motivation and objectives**

The series can be used as an alternative to urban drainage design and planning design using IDF-curves or design storms. Using continuous rain series as inputs to urban drainage models, it is possible to simulate the system response and relate the response to return periods of exceeding critical levels rather than return periods of the rain.

The main objectives of the project (KLIMAKS) is to develop and demonstrate application of continuous historical and climate projected rain series, which can be applied to:


- model the complete urban hydrological cycle (e.g. including the interaction between drainage system and watercourses, infiltration excess overland flow processes, ground water infiltration to drainage system, etc.)
- 2. model multiple function levels such as:
- every-day rainfall (relevant for storm water pond filling, combined sewer overflow estimation, real-time operation and control of waste water systems and treatment plants, etc.),
- design situations that corresponds to full capacity utilization (e.g. surcharging to critical levels with specific return periods),
- extreme situations where system capacity is exceeded and the aim is either to investigate potential flood damage or to design adaption solutions to minimize flood damages.


In this poster, we focus on stochastic generation and evaluation of rain series and stormwater detention pond design using the developed series. More details on the evaluation of rain series in urban drainage models can be found in [2]. Tab

Target climate variable	Notation	RCP 4.5		RCP 8.5	
		Mean	SD	Mean	SD
Annual precipitation	ap (mm)	1.07	0.10	1.14	0.09
Seasonal precipitation, winter	spwi (mm)	1.12	0.11	1.24	0.13
Seasonal precipitation, spring	spsp (mm)	1.12	0.11	1.20	0.13
Seasonal precipitation, summer	spsu (mm)	1.05	0.20	0.98	0.23
Seasonal precipitation, autumn	spau (mm)	1.04	0.09	1.10	0.13
Annual number of events above 10 mm per day	n10mm (#)	1.15	0.18	1.29	0.13
Annual number of events above 20 mm per day	n20mm (#)	1.31	0.33	1.61	0.31
Annual Maximum daily precipitation	mdp (mm)	1.13	0.11	1.23	0.16
Annual Maximum 5-day precipitation	m5dp (mm)	1.09	0.10	1.18	0.11
Rain intensity for 10 min, T=2 years	d10T2 (mm/h)	1.18	0.16	1.31	0.20
Rain intensity for 10 min, T=10 years	d10T10 (mm/h)	1.23	0.20	1.38	0.29
Rain intensity for 60 min, T=2 years	d60T2 (mm/h)	1.18	0.16	1.31	0.20
Rain intensity for 60 min, T=10 years	d60T10 (mm/h)	1.23	0.20	1.38	0.29
Rain intensity for 360 min, T=2 years	d360T2 (mm/h)	1.18	0.16	1.31	0.20
Rain intensity for 360 min, T=10 years	d360T10 (mm/h)	1.23	0.20	1.38	0.29

# **Climate projection of rainfall series for design** and analysis of urban drainage systems


Søren Thorndahl<sup>1</sup>, Christoffer Bang Andersen<sup>1</sup>, Preben Dam Simonsen<sup>2</sup>, Lene Lykke Kraglund<sup>2</sup>, Fredrik Boberg<sup>3</sup>, Lene Bassø Duus<sup>4</sup> <sup>1</sup>Aalborg University, Denmark; <sup>2</sup>Niras, Denmark; <sup>3</sup>Danish Meteorological Institute (DMI); <sup>4</sup>Aarhus Vand, Denmark

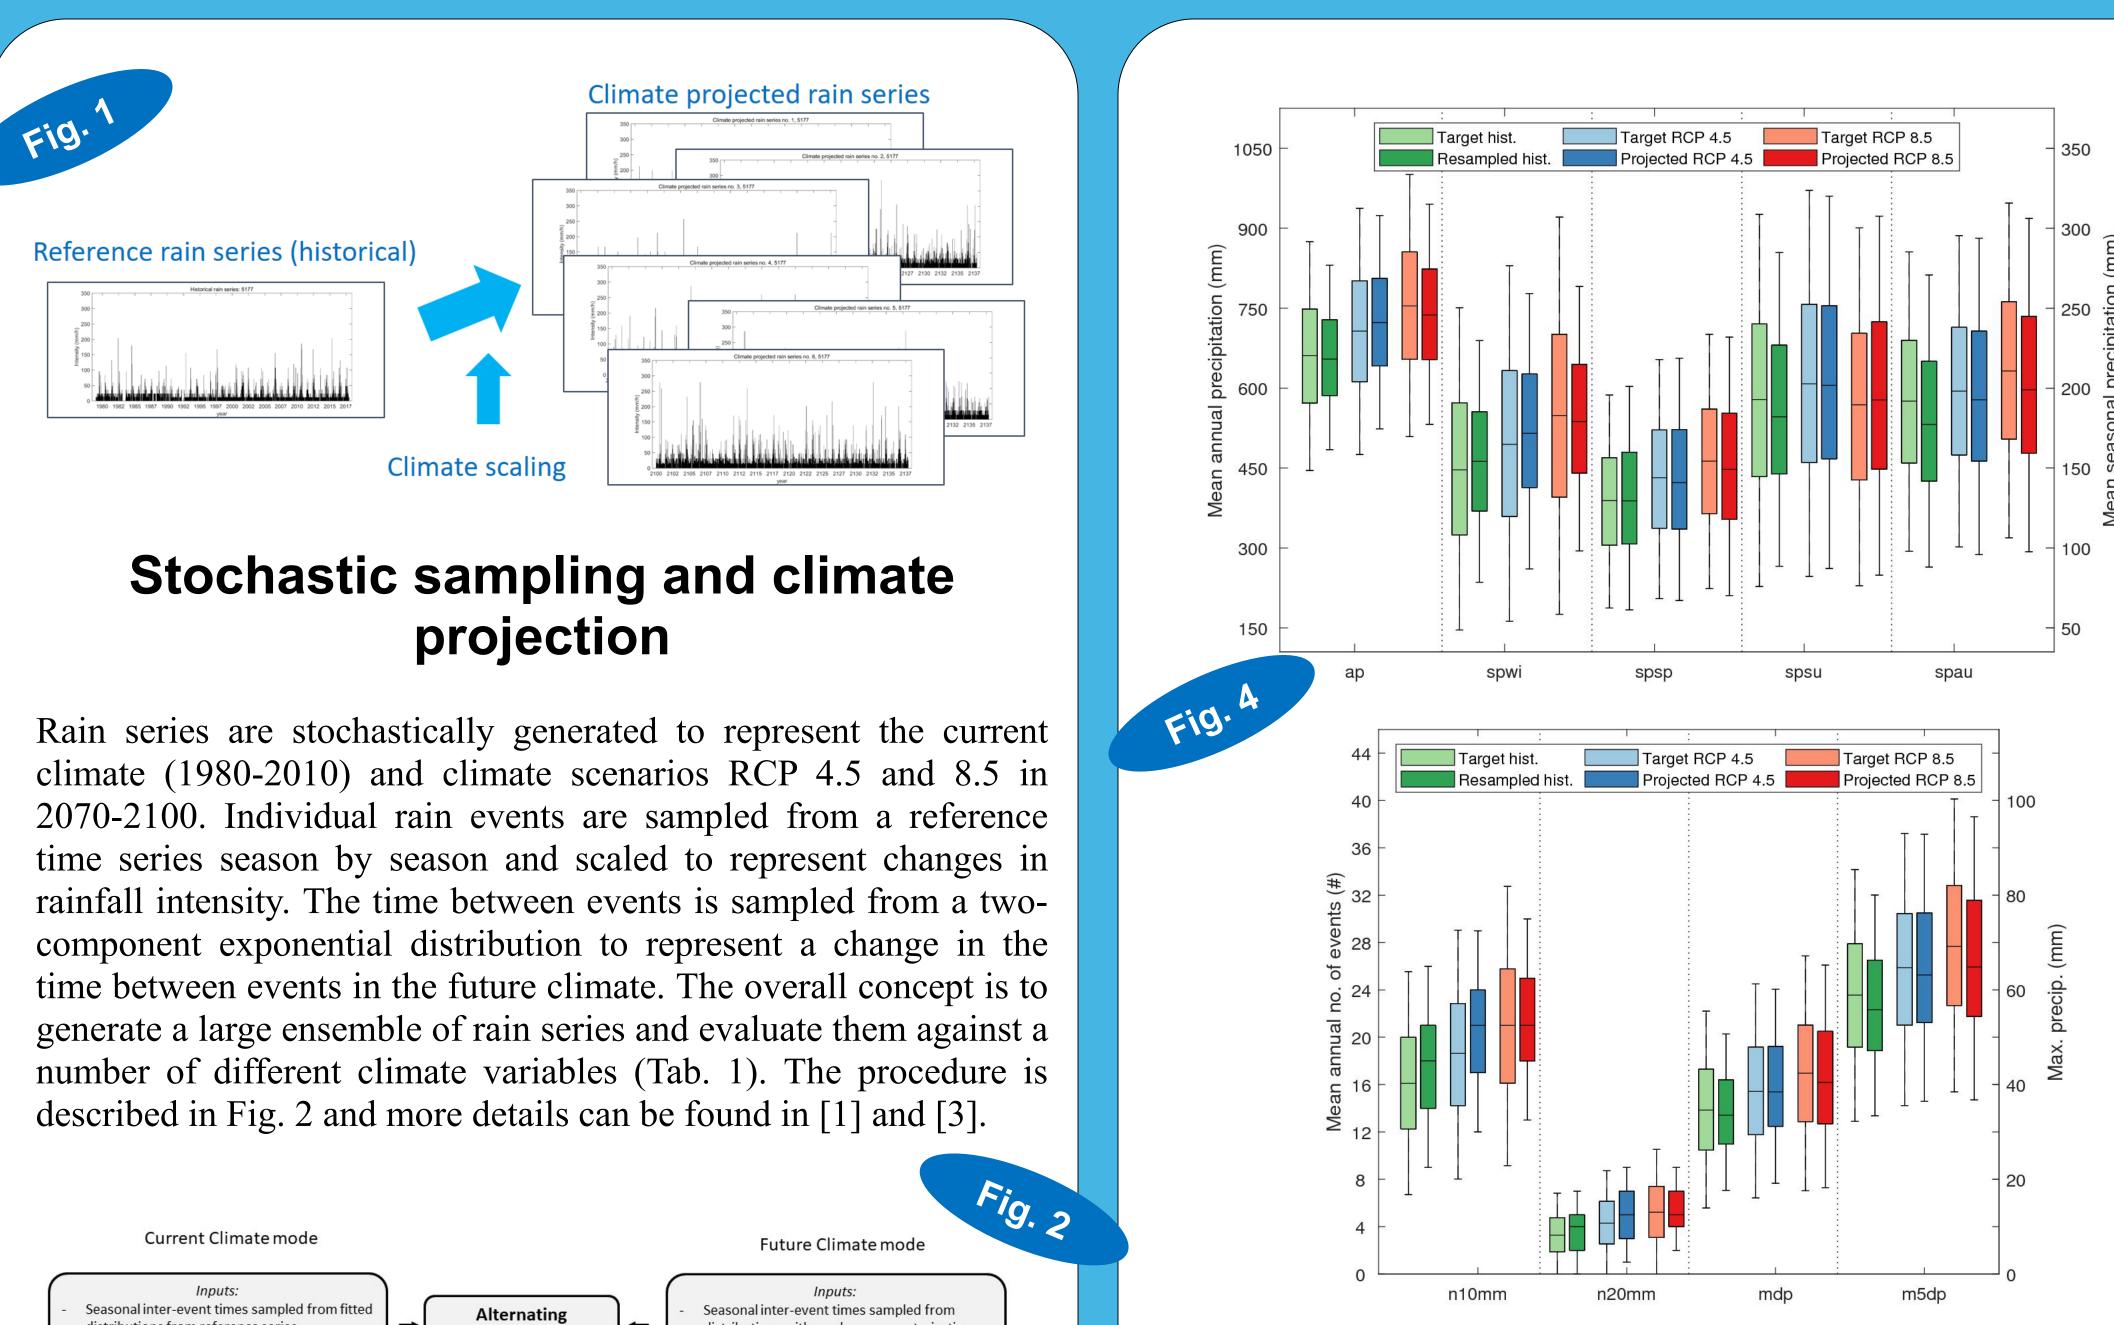

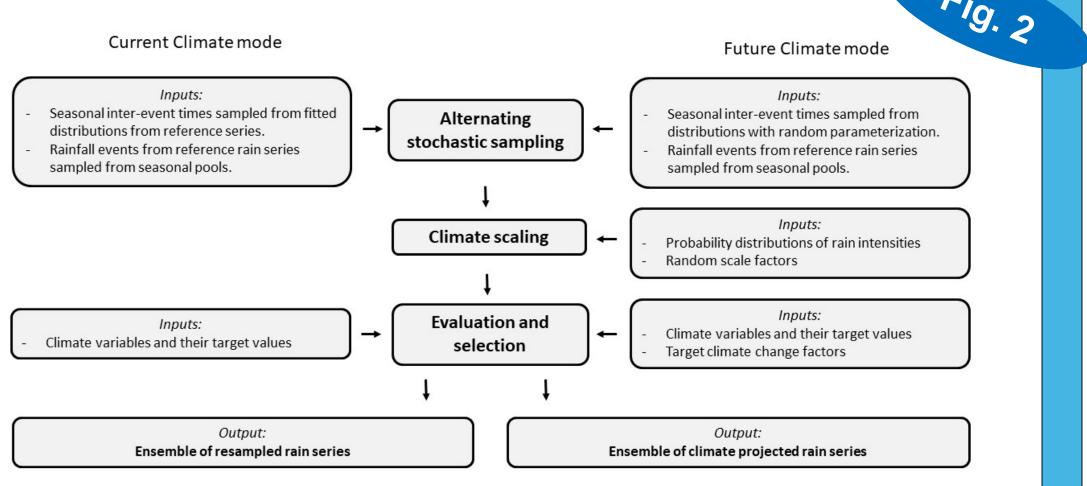

For each climate scenario, the top 100 rain series with the lowest weighted errors between climate parameter target and realization are selected for further analysis. The results are show in fig. 4 as boxplots for annual precipitation, seasonal precipitation, extremes and the three climate scenarios. The boxplots illustrate aggregated results of all realizations and the boxplot variability therefore represent both the year-to-year variability as well as the uncertainty related to climate projection.


Fig. 3 shows IDF curves for each climate scenario.

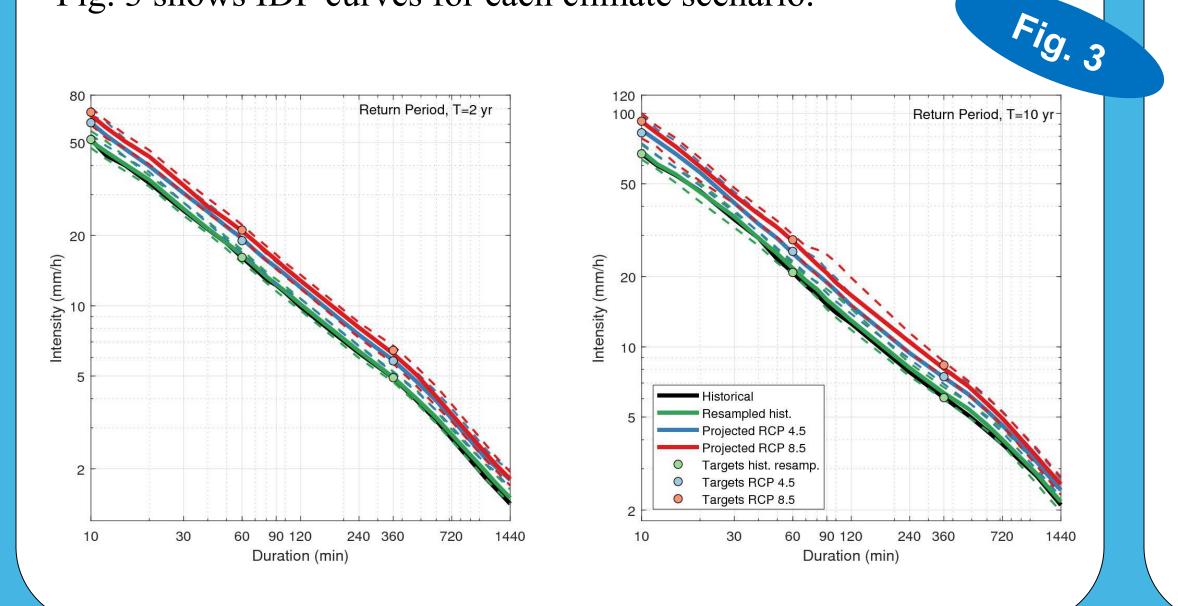


# **Design of stormwater ponds**

The generated rain series are applied for simple design of storm water detention ponds with different outlet flow rates for a connected catchment area of 1 ha. The procedure serves the purpose to investigate the variability between the accepted realizations in each climate scenario ensemble and to explore differences in design volumes depending on the design parameters and choice of the climate scenario.


Fig. 5 shows design volumes as function of return period for a fixed outlet flow rate of 1 l/s/ha. Fig. 6 shows volumes with outlet flow rates of 0.5, 1.0 and 5.0 l/s/ha for a 5-year return period.

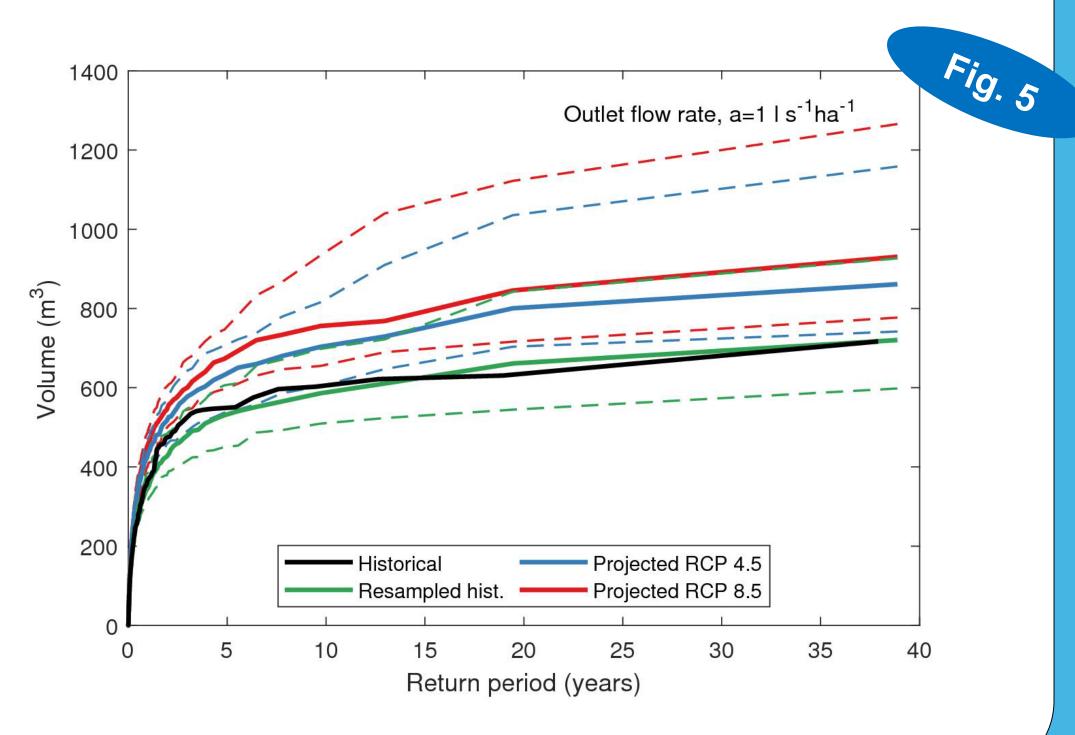

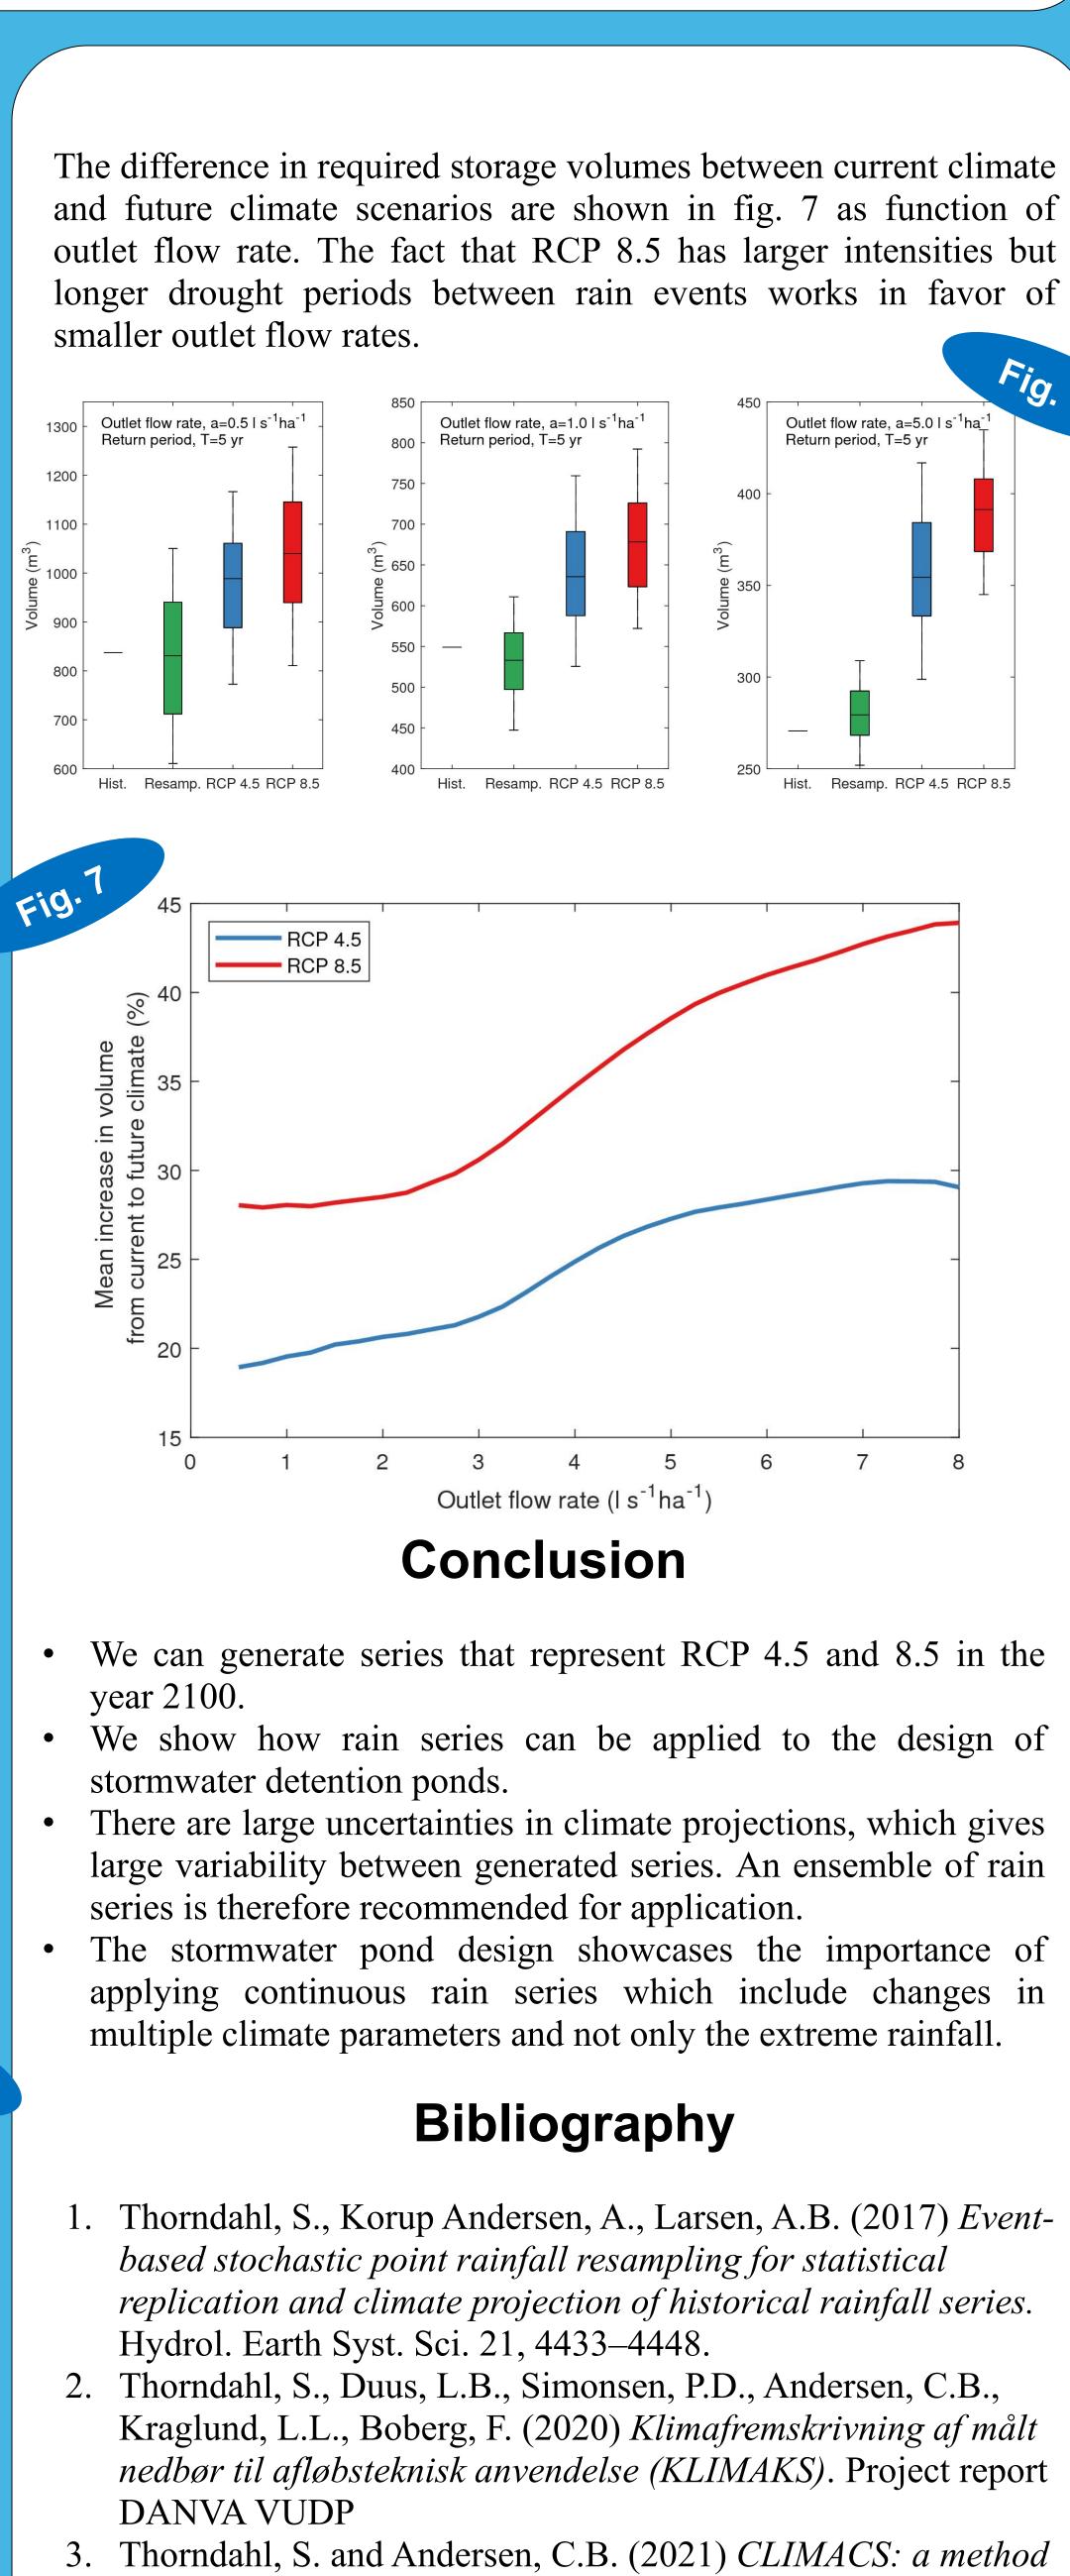



# 24 MAY – 4 JUNE, 2021

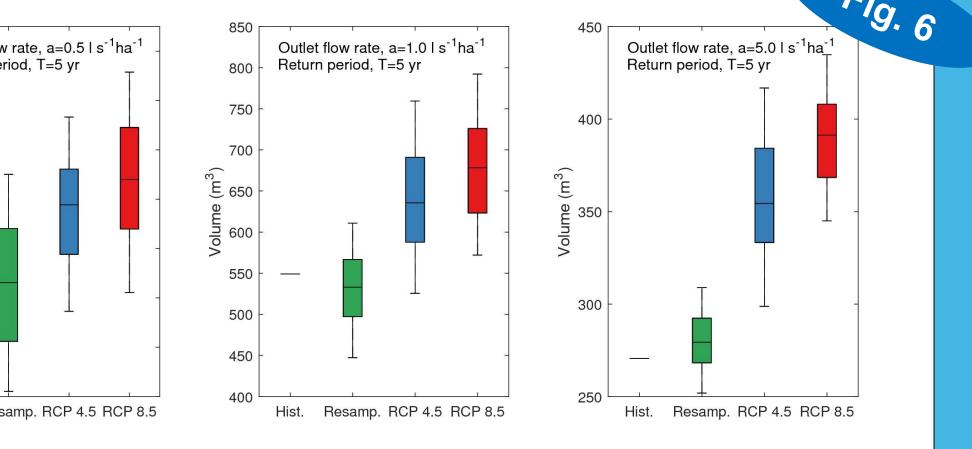

Thorndahl, S., Korup Andersen, A., Larsen, A.B. (2017) Eventreplication and climate projection of historical rainfall series.

Kraglund, L.L., Boberg, F. (2020) Klimafremskrivning af målt nedbør til afløbsteknisk anvendelse (KLIMAKS). Project report

Thorndahl, S. and Andersen, C.B. (2021) CLIMACS: a method for stochastic generation of continuous climate projected point rainfall for urban drainage design. In review, Journal of Hydrology