

Calculated Epithelial/Absorbed Power Density for Exposure from Antennas at 10–90 GHz:
Intercomparison Study Using a Planar Skin Model

Li, Kun; Koder, Sachiko; Poljak, Dragan; Diao, Yinliang; Sasaki, Kensuke; Susnjara, Anna;
Prokop, Alexander; Taguchi, Kenji ; Xi, Jingtian; Zhang, Shuai; Yao, Ming; Sacco, Giulia;
Zhadobov, Maxim; Hajj, Walid El; Hirata, Akimasa

Published in:
IEEE Access

DOI (link to publication from Publisher):
[10.1109/ACCESS.2023.3238582](https://doi.org/10.1109/ACCESS.2023.3238582)

Creative Commons License
CC BY 4.0

Publication date:
2023

Document Version
Accepted author manuscript, peer reviewed version

[Link to publication from Aalborg University](#)

Citation for published version (APA):

Li, K., Koder, S., Poljak, D., Diao, Y., Sasaki, K., Susnjara, A., Prokop, A., Taguchi, K., Xi, J., Zhang, S., Yao, M., Sacco, G., Zhadobov, M., Hajj, W. E., & Hirata, A. (2023). Calculated Epithelial/Absorbed Power Density for Exposure from Antennas at 10–90 GHz: Intercomparison Study Using a Planar Skin Model. *IEEE Access*, 11, 7420 - 7435. <https://doi.org/10.1109/ACCESS.2023.3238582>

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

Take down policy

If you believe that this document breaches copyright please contact us at vbn@aub.aau.dk providing details, and we will remove access to the work immediately and investigate your claim.

Downloaded from vbn.aau.dk on: December 05, 2025

Date of publication xxxx 00, 0000, date of current version xxxx 00, 0000.

Digital Object Identifier 10.1109/ACCESS.2017.Doi Number

Calculated Epithelial/Absorbed Power Density for Exposure from Antennas at 10–90 GHz: Intercomparison Study Using a Planar Skin Model

Kun Li¹, Member, IEEE, Sachiko Koder², Member, IEEE, Dragan Poljak³, Senior Member, IEEE, Yinliang Diao⁴, Member, IEEE, Kensuke Sasaki⁵, Member, IEEE, Anna Susnjara³, Student Member, IEEE, Alexander Prokop⁶, Member, IEEE, Kenji Taguchi⁷, Member, IEEE, Jingtian Xi⁸, Member, IEEE, Shuai Zhang⁹, Senior Member, IEEE, Ming Yao⁹, Student Member, IEEE, Giulia Sacco, Member¹⁰, IEEE, Maxim Zhadobov¹⁰, Senior Member, IEEE, Walid El Hajj¹¹, Member, IEEE, Akimasa Hirata², Fellow, IEEE.

¹Faculty of Engineering and Design, Kagawa University, Takamatsu 761-0396, Japan

²Department of Electrical and Mechanical Engineering, Nagoya Institute of Technology, Nagoya 466-8555, Japan

³University of Split, Faculty of Electrical Engineering, Mechanical Engineering and Naval Architecture, 21000 Split, Croatia

⁴College of Electronic Engineering, South China Agricultural University, Guangzhou 510642, China

⁵National Institute of Information and Communications Technology, Tokyo 184-8795, Japan

⁶Dassault Systèmes SIMULIA, Darmstadt, Germany

⁷Kitami Institute of Technology, Kitami 090-8507, Japan

⁸Foundation for Research on Information Technologies in Society (IT²IS), 8004, Zurich, Switzerland

⁹Department of Electronic Systems, Aalborg University, 9220 Aalborg, Denmark

¹⁰IETR (Institut d'Électronique et des Technologies du numéRique), University of Rennes 1 CNRS, UMR 6164, F-35000 Rennes, France

¹¹Intel Corporation, Wireless Test and Certification Center, Intel, Antibes 06600, France

Corresponding author: Kun Li (e-mail: li.kun@kagawa-u.ac.jp).

ABSTRACT International organizations have collaborated to revise standards and guidelines for human protection from exposure to electromagnetic fields. In the frequency range of 6–300 GHz, the permissible spatially averaged epithelial/absorbed power density, which is primarily derived from thermal modeling, is considered the basic restriction. However, for the averaging methods of the epithelial/absorbed power density inside human tissues, only a few groups have presented calculated results obtained using different exposure conditions and numerical methods. Because experimental validation is extremely difficult in this frequency range, this paper presents the first intercomparison study of the calculated epithelial/absorbed power density inside a human body model exposed to different frequency sources ranging from 10–90 GHz. This intercomparison aims to clarify the difference in the calculated results caused by different numerical electromagnetic methods in dosimetry analysis from 11 research groups using planar skin models. To reduce the comparison variances caused by various key parameters, computational conditions (e.g., the antenna type, dimensions, and dielectric properties of the skin models) were unified. The results indicate that the maximum relative standard deviation (RSD) of the peak spatially averaged epithelial/absorbed power densities for one- and three-layer skin models are less than 17.49% and 17.39%, respectively, when using a dipole antenna as the exposure source. For the dipole array antenna, the corresponding maximum RSD increases to 32.49% and 42.55%, respectively. Under the considered exposure scenarios, the RSD in the spatially averaged epithelial/absorbed power densities decrease from 42.55% to 16.7% when the frequency is increased from 10–90 GHz. Furthermore, the deviation from the two equations recommended by the exposure guidelines for deriving the spatially averaged epithelial/absorptive power density is mostly within 1 dB. The fair agreement in the intercomparison results demonstrates that the variances of the spatially averaged epithelial/absorbed power densities calculated using planar skin models are marginal.

INDEX TERMS dosimetry modeling, electromagnetic field, epithelial/absorbed power density, millimeter wave exposure, standardization, skin model

I. INTRODUCTION

Owing to the development of various wireless systems, research on the protection of humans exposed to electromagnetic fields (EMFs) has attracted considerable attention [1]–[4]. In 2019 and 2020, the IEEE International Committee on Electromagnetic Safety (ICES) Technical Committee (TC) 95 and the International Commission on Non-Ionizing Radiation Protection (ICNIRP) revised the exposure standards and guidelines, respectively, to prescribe the exposure limits for people in restricted environments/occupational exposure and for unrestricted environments/general public exposure conditions [5], [6].

In the revised standard/guidelines, the two-tier approach is used, similar to the previous versions. The epithelial/absorbed power density (hereafter referred as APD) is used as a new internal physical quantity to set the dosimetric reference limit (DRL) or basic restriction (BR), which is derived from the operational threshold of adverse health effects, considering the safety or reduction factor in the frequencies from 6–300 GHz. These DRL or BR were derived based on thermal modeling [7]–[12], which provides a high degree of protection against dominant adverse health effects of exposure, that is, localized temperature elevation on the surface of human skin tissue. To correlate well with the local maximum temperature increase, it is suggested that the APD be averaged over an area of 4 cm² from 6–300 GHz. Above 30 GHz, a smaller spatial averaging area of 1 cm² should also be considered to account for possible narrow-beam exposure scenarios. For this averaging area, the limit was relaxed by a factor of 2. Conversely, the permissible external exposure reference level (ERL) [5] or reference level (RL) [6], that is, the incident power density (IPD) in free space, which is derived from the APD, has been prescribed conservatively. Based on the exposure guidelines/standards, the IPD should be averaged over an area of 4 cm² for frequencies ranging from 6–300 GHz. For frequencies higher than 30 GHz, additional criteria of the IPD averaged over 1 cm² are given with a relaxation of ERL/RL by a factor of two for local beam-like exposures, similar to those of the spatial average of the APD.

Dosimetric studies for both plane-wave [13]–[21] and antenna source exposures [22]–[40] were conducted to determine the relationship between the power densities and resultant surface temperature elevation above 6 GHz. Subcommittee 6 of the IEEE ICES TC95 reported on a guide for defining the spatial average of IPD to correlate surface temperature elevation [41]. Using intercomparison from established working groups in dosimetry analysis using various skin and antenna models, the deviations of the heating factors of the spatially averaged IPDs were insignificant [42], including the oblique incidence angle effects caused by phased array antennas [43]. In comparison with the IPD outside human tissue, however, the APD, which is closely correlated

with the superficial heating of human tissue, has not been studied sufficiently and to a greater extent. Only a few groups computed the APD and resultant temperature rise at frequencies greater than 6 GHz using different exposure conditions and methods [44]–[48]. Considering different important factors (e.g., the antenna type (size), frequency, separation distance from the radiation source, averaging area, and tissue electrical parameters), it is worthwhile to further discuss and clarify the appropriate schemes for the spatial average of the APD in conventional planar models and in non-planar and complex irregular human tissue models.

Under Subcommittee 6 of the IEEE ICES TC95, a new working group (WG) was established, which aims to study and quantify the effects of different schemes on the spatial average of the APD above 6 GHz. The cause of the variances of the numerical calculations in the dosimetry analyses will be evaluated through an objective comparison of the computation results from participating organizations using their proper assessment methods and average schemes with various body and antenna models. This intercomparison of the specific absorption rate (SAR) has been conducted for standardization in frequency bands of a few GHz [49]. This is because the measurement of the field strength in biological bodies is difficult; thus, a computational approach is often conducted. Additionally, for exposure at higher frequencies (particularly above 6 GHz, where the penetration depth is below approximately 1 cm), precise measurement in the depth direction becomes extremely difficult.

The WG task for the average scheme and assessment method of the spatially averaged APD is divided into three phases:

- intercomparison of spatially averaged APD using conventional planar models
- appropriate average schemes using non-planar shaped models (e.g., cylinder or sphere)
- ultimate challenge of the complex irregular voxel model of realistic human tissue, including thermal analysis

To evaluate the deviation of the spatially averaged APD caused by the numerical calculation method of each research organization, a traditional planar skin model with unified computational conditions was utilized for the first step of the intercomparison, as mentioned above. This study computed the spatially averaged IPD and APD at the skin surface from 10–90 GHz using computational approaches with unified body and antenna models. An intercomparison of the numerical calculation variances from different research organizations using their simulation codes and commercial electromagnetic (EM) solvers was performed.

II. Analytical Model and Method

A. Exposure Scenarios

Eleven different organizations collaborated to conduct this study: Nagoya Institute of Technology (NITech), South China Agricultural University (SCAU), Kagawa University (Kagawa Univ.), Aalborg University (AAU), University of Split (UniSplit), National Institute of Information and Communications Technology (NICT), Kitami Institute of Technology (KITech), Institut d'Électronique et des Technologies du numÉrique (IETR), Foundation for Research on Information Technologies in Society (IT'IS), Dassault Systèmes SIMULIA (3DS), and Intel Corporation (Intel). Table I presents an overview of the scenarios evaluated numerically by participating organizations. As presented in the table, a separation distance between the antenna and skin surface ranging within 5–15 mm was considered for frequencies of 10 and 30 GHz. At 90 GHz, the separation distances were set from 2–10 mm for the extreme near-field exposure conditions of interest at higher frequencies. Nonetheless, in most wireless device application scenarios, the antenna was not located close to the body to such a separation distance. All the conditions presented in this study clarify the variances in spatially averaged APD computed by different research organizations.

The antenna and planar skin models for the numerical simulations used by different organizations are shown in Fig. 1. As suggested in the discussion of the WG under Subcommittee 6 of the IEEE ICES TC95, a single half-wavelength dipole antenna and a 4×4 dipole antenna array were used in this intercomparison study. The half-wavelength dipole was modeled as a perfect electric conductor. Dipoles were designed at 10, 30, and 90 GHz by each research organization. For most research organizations, the antenna was resonated with an adjusted length to obtain the maximum radiation power emitted from the antenna to the extent possible.

Table II summarizes the dipole lengths used by each organization. For the 4×4 dipole antenna arrays, almost the same length (Table II) was used by the corresponding organization of the dipole element in the array. The separation distance between the feeding points of any two adjacent dipole elements is $\lambda/2$, where λ is the free-space wavelength. For both dipole and dipole arrays, the total antenna input power was normalized to 10 mW representing a typical power level of mobile devices in the considered frequency range, as in the previous WG [41], [42].

On the other hand, a one-layer skin model and stratified models composed of skin, fat, and muscle layers were employed in this study for dosimetry analysis (Fig. 1). The dimensions of the skin models were $L \times L \times T$ (mm³; Table III). The dielectric properties of the tissues obtained by a four-Cole–Cole dispersion model [50]–[52] were employed. The electrical parameters for each tissue layer in the skin model are summarized in Table IV.

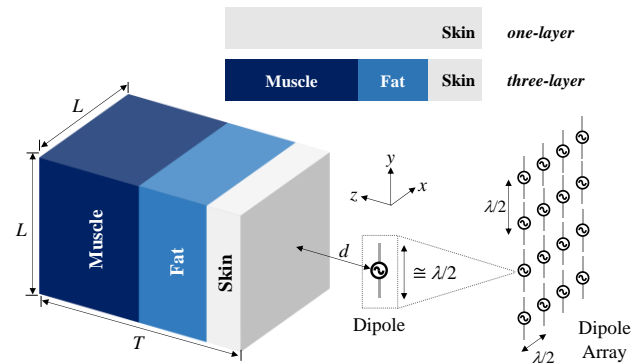


FIGURE 1. Antenna and skin models for dosimetry analysis.

TABLE I
EXPOSURE SCENARIOS

Antenna type	Skin Model	Frequency (GHz)	Distance (mm)
$\lambda/2$ dipole, 4×4 dipole array	one-layer, three-layer	10	5, 10, 15
		30	5, 10, 15
		90	2, 5, 10

TABLE II
LENGTHS OF DIPOLE ANTENNA ELEMENTS FOR EACH ORGANIZATION

Org.	10 GHz (mm)	30 GHz (mm)	90 GHz (mm)
O1	13.75	4.25	1.25
O2	13.5	4.75	1.5
O3	13.6	4.4	1.5
O4	12.6	4.11	1.46
O5	15.0	5.0	1.67
O6	13.75	4.625	1.55
O7	14.5	4.75	1.5
O8	15.0	5.0	1.67
O9	13.6	4.53	1.51
O10	15.0	5.0	1.67
O11	13.49	4.57	1.52

Abbreviations: Organization (Org.).

TABLE III
DIMENSION AND THICKNESSES OF SKIN MODELS AT EACH FREQUENCY

Skin model	Dimension	10 GHz	30 GHz	90 GHz
one-layer	L (mm)	200	150	60
	T (mm)	100	75	30
three-layer	L (mm)	100	50	50
	T_{skin} (mm)	1.5	1.5	1.5
	T_{fat} (mm)	4.0	4.0	4.0
	T_{muscle} (mm)	14.5	14.5	14.5

TABLE IV
DIELECTRIC PROPERTIES FOR SKIN MODELS

Skin model	Tissue	10 GHz		30 GHz		90 GHz	
		σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	ϵ_r
one-layer	Skin	8.48	32.41	27.31	16.63	41.94	6.83
	Skin	8.48	32.41	27.31	16.63	41.94	6.83
three-layer	Fat	0.59	4.60	1.79	3.64	3.41	2.93
	Muscle	10.63	42.76	35.49	23.16	60.72	9.30

TABLE V
NUMERICAL METHOD AND SPATIAL RESOLUTION (Δ) FOR NUMERICAL SIMULATION BY EACH ORGANIZATION

Org.	Method	10 GHz (mm)	30 GHz (mm)	90 GHz (mm)
O1	FDTD	0.25	0.25	0.05
O2	FDTD	0.5	0.25	0.1
O3	FDTD	0.2	0.2	0.05
O4	FIT	0.25	0.1-0.2	0.01-0.05
O5	GB-IBEM	0.25	0.25	0.25
O6	FDTD	0.25	0.125	0.05
O7	FDTD	0.5	0.25	0.1
O8	FEM	0.014-15.404	0.007-5.557	0.002-1.874
O9	FDTD	0.25-0.05	0.1-0.05	0.0125-0.05
O10	TLM	0.15-1.65	0.1-0.55	0.0333-0.183
O11	FEM	0.5	0.5	0.1

Table V summarizes the numerical techniques used to evaluate the IPD in free space and the APD inside the simplified human tissue models. The spatial resolutions used in each organization were also summarized. The finite-difference time-domain (FDTD) [52] method was adopted by six organizations that used their own developed in-house codes. In addition to the FDTD methods, the Galerkin-Bubnov indirect boundary element method (GB-IBEM) [54], finite integration technique (FIT) [55], finite element method (FEM) [56], and transmission line method (TLM) [57] have been used separately by other research organizations. It should be noted that the FIT, FEM, and TLM methods used by O4, O8, and O10, respectively, are the three different EM-solvers from commercial simulation software. The other group (O11) that used the FEM method was performed using different types of commercial software. Therefore, this study first covered almost all the commonly used methods of EM simulation for dosimetry analysis without the duplication of commercial software and code. This enables the provision of very neutral and representative intercomparison results to determine the

deviation of the calculated APD caused by different numerical methods.

First, the IPDs in free space were calculated without the presence of the body to clarify the influence of the different algorithms on the EM calculations of the antenna near-field. Similar to the previous WG, two definitions of the spatial-average incident power density (sIPD), i.e., the normal (sIPD_n) and norm (sIPD_{tot}) component of the time-averaged power density for the EMF, were examined in the absence of the human body (Eqs. (6) and (7) in [42]). The spatial-average APD (sAPD) in the tissue was calculated for the modeling scenario using the simplified human block model. As recommended in the ICNIRP-2020 exposure guidelines [6], two general equations for deriving the sAPD were employed by each organization, which are expressed by the following formulae:

$$sAPD(\mathbf{r}) = \frac{1}{A} \iint_A \int_0^{z_{max}} \sigma(\mathbf{r}) |\mathbf{E}(\mathbf{r})|^2 dz ds, \quad (1)$$

$$sAPD = \frac{1}{A} \iint_A \text{Re}(\mathbf{E}(\mathbf{r}) \times \mathbf{H}^*(\mathbf{r})) \cdot d\mathbf{s}, \quad (2)$$

where \mathbf{E} and \mathbf{H} indicates the effective values of the complex electric and magnetic fields inside the body surface, respectively; * denotes the complex conjugate; z_{max} is the depth where the EMF is negligibly small in respect to that at the skin surface; \mathbf{r} denotes the position vector; and $d\mathbf{s}$ is the integral variable vector whose direction is normal to the integral area A on the body surface (x - y plane at $z = 0$). Because only the planar skin model was considered in this paper, the averaging areas in Eqs. (1) and (2) were averaged over a cubic volume and square area of the flat body surface, respectively, corresponding to the average area of the sIPDs.

III. Intercomparison Results

The intercomparison results in terms of the peak spatial-average IPD and APD ($psIPD$ and $psAPD$) using different antennas are presented in this section. The $psIPD_n$, $psIPD_{tot}$, and $psAPD$ were averaged over an area of $A = 4 \text{ cm}^2$ and $A = 1 \text{ cm}^2$ at 10–90 GHz.

A. Comparison of Peak Spatial-Average Incident Power Density

Figures 2 and 3 show the results of $psIPD$ as a function of the antenna-to-skin separation distance d exposed to the single half-wavelength dipole or 4×4 dipole array antenna for the exposure scenarios in Table I, respectively. The solid lines indicate the $psIPD_n$, whereas the dashed lines denote the $psIPD_{tot}$ when $A = 1 \text{ cm}^2$. The dash-dotted and dotted lines represent the corresponding results for $A = 4 \text{ cm}^2$.

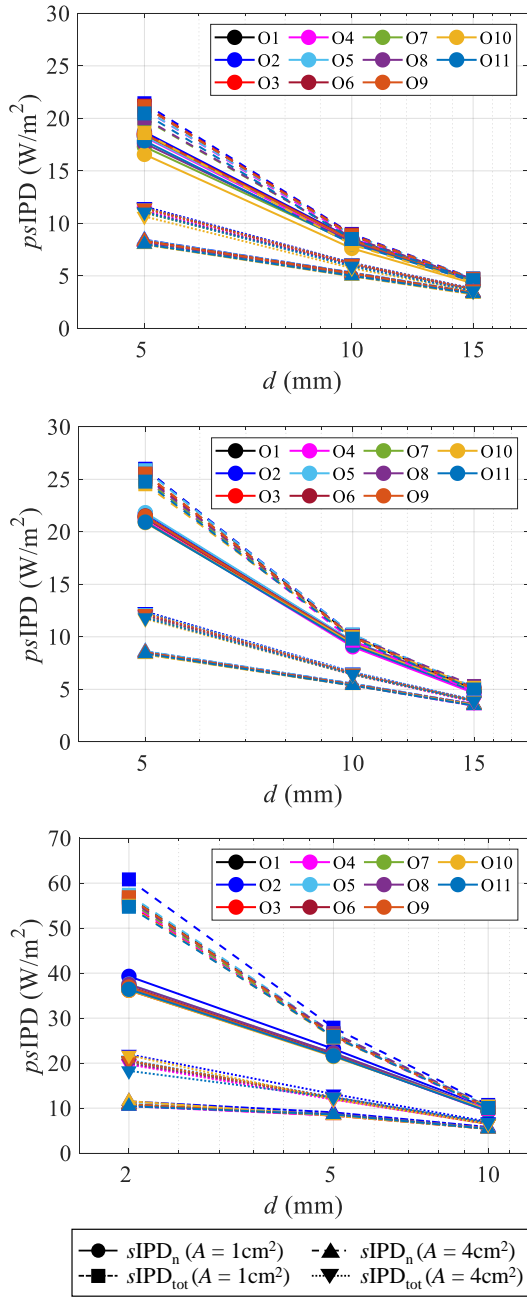


FIGURE 2. Spatially averaged incident power densities as a function of the antenna-to-skin separation distance for half-wavelength dipoles at frequencies of (a) 10, (b) 30, and (c) 90 GHz.

In the case of the dipole antenna (Fig. 2), both $psIPD_n$ and $psIPD_{tot}$ decrease monotonically with an increase in the separation distance d . $psIPD_{tot}$ is greater than $psIPD_n$ in the 5–10 mm range at 10–30 GHz and the 2–5 mm range at 90 GHz. At $d > 10$ mm, all the results do not show any significant differences between the two definitions of the $sIPD$. The maximum absolute differences of the $psIPD$ among all the research groups are within 0.62, 0.45, and 0.43 dB respectively, at 10, 30, and 90 GHz when $d > 5$ mm.

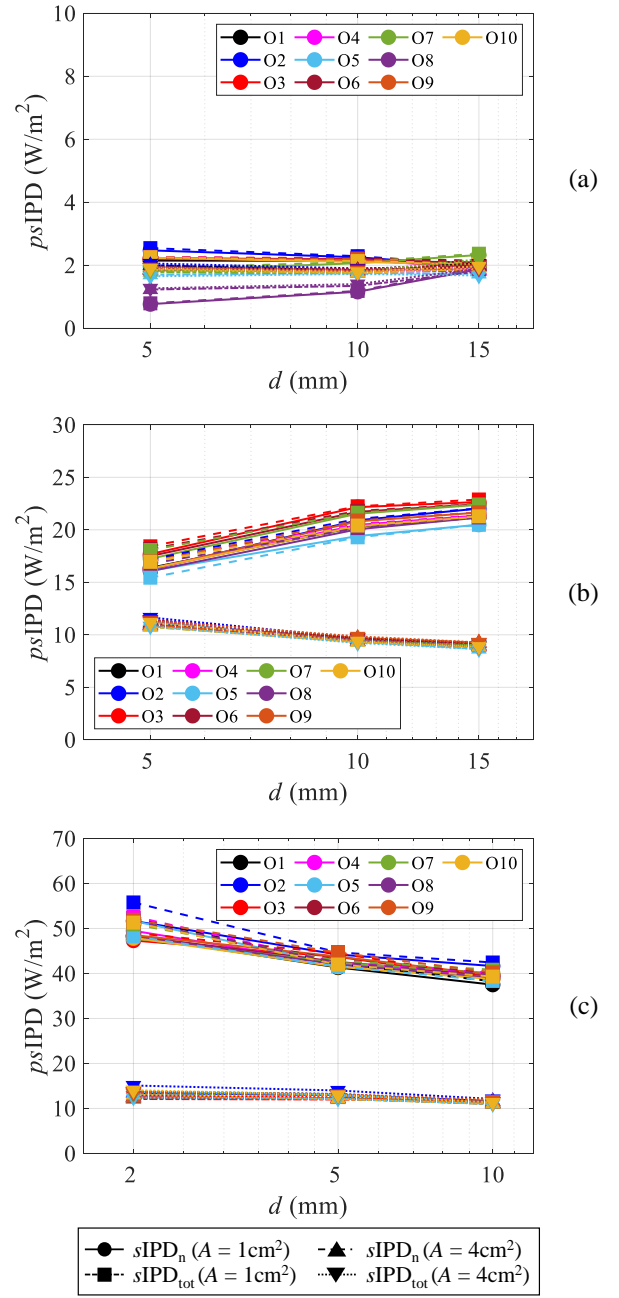


FIGURE 3. Spatially averaged incident power densities as a function of the antenna-to-skin separation distance for 4×4 dipole array at frequencies of (a) 10, (b) 30, and (c) 90 GHz.

For the 4×4 dipole array (Fig. 3), the profiles of both $psIPD_n$ and $psIPD_{tot}$ exhibit different trends compared to those of the dipole antennas owing to the dispersion of multiple near-field peaks generated by the wave source of the antenna array. Moreover, the difference between the $psIPD_n$ and $psIPD_{tot}$ was reduced.

The maximum absolute differences of $psIPD$ among all the organizations for the 4×4 dipole array are within 5.09, 0.77, and 0.6 dB respectively, at 10, 30, and 90 GHz when d is

greater than 5 mm. The above results indicate that, at a separation distance $d > 5$ mm, there is no obvious discrepancy between the different EM-simulation and spatial average methods for the calculation of $psIPD_n$ and $psIPD_{tot}$ for either the dipole or dipole antenna arrays.

TABLE VI
MEAN VALUE AND STANDARD DEVIATION OF SPATIALLY AVERAGED
INCIDENT POWER DENSITIES FOR DIPOLE ANTENNAS

Distance (mm)	Frequency (GHz)	$psIPD_n$ (A=1cm ²)	$psIPD_{tot}$ (A=1cm ²)	$psIPD_n$ (A=4cm ²)	$psIPD_{tot}$ (A=4cm ²)
5	10	18.04 ± 0.65	20.62 ± 0.83	8.23 ± 0.16	11.28 ± 0.29
10		8.26 ± 0.26	8.72 ± 0.29	5.19 ± 0.12	6.09 ± 0.15
15		4.53 ± 0.1	4.66 ± 0.11	3.37 ± 0.06	3.7 ± 0.08
5	30	21.31 ± 0.33	25.34 ± 0.49	8.46 ± 0.1	12.09 ± 0.22
10		9.36 ± 0.15	9.99 ± 0.16	5.43 ± 0.06	6.51 ± 0.09
15		4.91 ± 0.13	5.08 ± 0.13	3.52 ± 0.05	3.91 ± 0.05
2	90	36.99 ± 0.9	56.53 ± 1.67	10.83 ± 0.39	20.38 ± 0.99
5		21.92 ± 0.48	26.3 ± 0.62	8.55 ± 0.21	12.31 ± 0.33
10		9.55 ± 0.22	10.23 ± 0.24	5.49 ± 0.12	6.62 ± 0.15

Unit: W/m².

TABLE VII
MEAN VALUES AND STANDARD DEVIATIONS OF SPATIALLY AVERAGED
INCIDENT POWER DENSITIES FOR DIPOLE ANTENNA ARRAYS

Distance (mm)	Frequency (GHz)	$psIPD_n$ (A=1cm ²)	$psIPD_{tot}$ (A=1cm ²)	$psIPD_n$ (A=4cm ²)	$psIPD_{tot}$ (A=4cm ²)
5	10	2.02 ± 0.48	2.06 ± 0.49	1.79 ± 0.21	1.84 ± 0.23
10		2.03 ± 0.32	2.06 ± 0.33	1.75 ± 0.15	1.79 ± 0.15
15		2.01 ± 0.13	2.05 ± 0.15	1.9 ± 0.1	1.96 ± 0.13
5	30	16.6 ± 0.62	17.21 ± 0.86	10.93 ± 0.16	11.3 ± 0.22
10		21.77 ± 0.84	20.85 ± 0.87	9.47 ± 0.14	9.56 ± 0.18
15		21.67 ± 0.69	21.72 ± 0.73	8.99 ± 0.19	9.0 ± 0.2
2	90	48.93 ± 1.55	51.95 ± 2.05	12.69 ± 0.51	13.59 ± 0.72
5		42.55 ± 1.0	43.03 ± 1.16	12.35 ± 0.37	13.0 ± 0.47
10		39.34 ± 1.07	39.85 ± 1.23	11.25 ± 0.22	11.57 ± 0.33

Unit: W/m².

Tables VI and VII summarize the mean value and standard deviation of computed $psIPD_n$ and $psIPD_{tot}$ for the dipole and dipole array, respectively. The separation distances from the antenna for the cases of $d = 5, 10$, and 15 mm for $10\text{--}30$ GHz and $d = 2, 5$, and 10 mm for 90 GHz were compared. The relative standard deviation (RSD), which is defined as the ratio of the standard deviation to the mean value, was analyzed as a metric for the intercomparison of different research groups.

For the dipole source, as presented in Table VI, the maximum RSD values of $psIPD$ were 4.05% ($d = 5$ mm), 2.58% ($d = 15$ mm), and 4.84% ($d = 2$ mm), respectively, at a frequency of $10\text{--}90$ GHz. Conversely, for the case of the 4×4 dipole array, as presented in Table VII, the maximum RSD was approximately 23.55% ($d = 5$ mm), 5.0% ($d = 5$ mm), and 5.26% ($d = 2$ mm) at a frequency of $10\text{--}90$ GHz. The above results agree well with the outcomes of previous WG activities (see Tables 6 and 7 in [42]). This shows that the impact on the calculation of the antenna near-field distribution in free space caused by the different numerical methods used by each organization is very small, demonstrating the effectiveness of EM-simulation methods for the antennas themselves.

B. Comparison of Peak Spatial-Average Epithelial/Absorbed Power Density

Figures 4 and 5 show the intercomparison results of the $psAPD$ as a function of the antenna-to-skin separation distance d exposed to the dipole when the averaging area A is 1 and 4 cm², respectively. In Figs. 4 and 5, the solid lines with circular markers indicate the results obtained using the one-layer model, whereas the dashed lines with square markers denote those obtained using the three-layer model.

As shown in Figs. 4 and 5, for both the one- and three-layer skin models exposed to a dipole antenna, the profiles of $psAPD$ decrease gradually as d increases. At 10 GHz, relatively large deviations are observed in the different organizations. The maximum absolute differences of $psAPD$ are 3.24 and 3.0 dB at $d = 5$ mm, respectively, for the one- and three-layer models when $A = 1$ cm². When A increases to 4 cm², the corresponding differences are reduced to 3.62 and 2.89 dB, respectively.

However, at frequencies ranging from $30\text{--}90$ GHz, the deviations caused by the EM simulation methods are very small for both the one- and three-layer models. As shown in Figs. 4 (b) and (c) and Figs. 5 (b) and (c), the maximum absolute differences of $psAPD$ are within 1.07 and 2.46 dB, respectively, at 30 and 90 GHz when $A = 1$ cm². This difference is further reduced to 1.21 and 2.49 dB, respectively, for $A = 4$ cm².

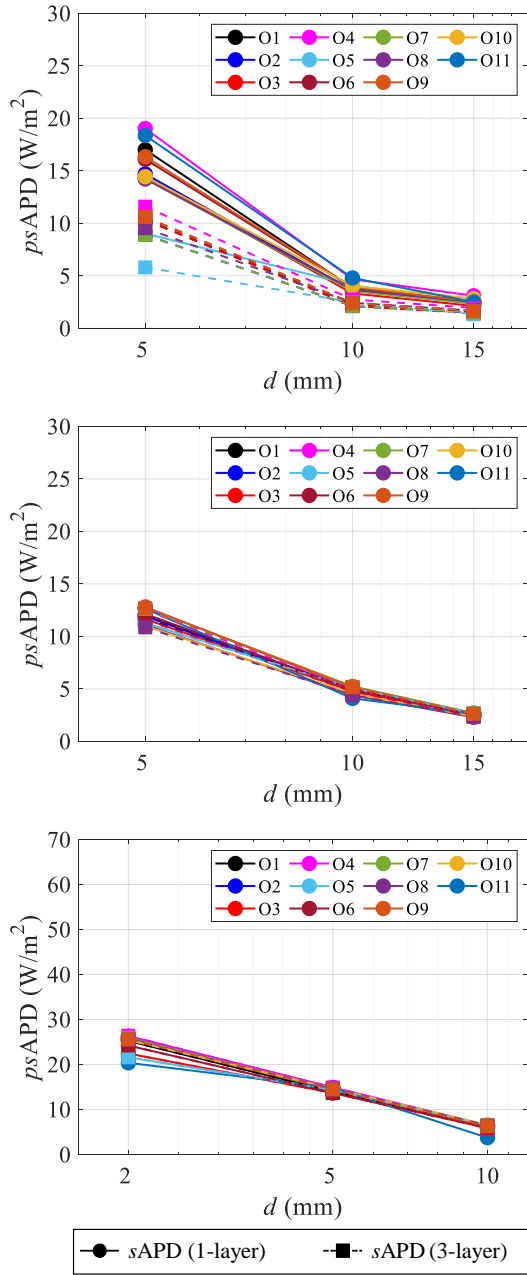


FIGURE 4. Spatially averaged epithelial/absorbed power density as a function of the antenna-to-skin separation distance for a dipole when $A = 1 \text{ cm}^2$ at frequencies of (a) 10, (b) 30, and (c) 90 GHz.

Figures 6 and 7 show the intercomparison results of the $psAPD$ as a function of the antenna-to-skin separation distance d exposed to the radiation sources of the 4×4 dipole array when the average area A is 1 and 4 cm^2 , respectively. Unlike the dipoles illustrated in Figs. 4 and 5, the deviation of $psAPDs$ at 10 GHz is nonexistent at $d = 5 \text{ mm}$, but at $d = 15 \text{ mm}$. The maximum absolute differences of $psAPD$ at 10 GHz are 9.84 and 10.15 dB at $d = 15 \text{ mm}$ when A is 1 and 4 cm^2 , respectively.

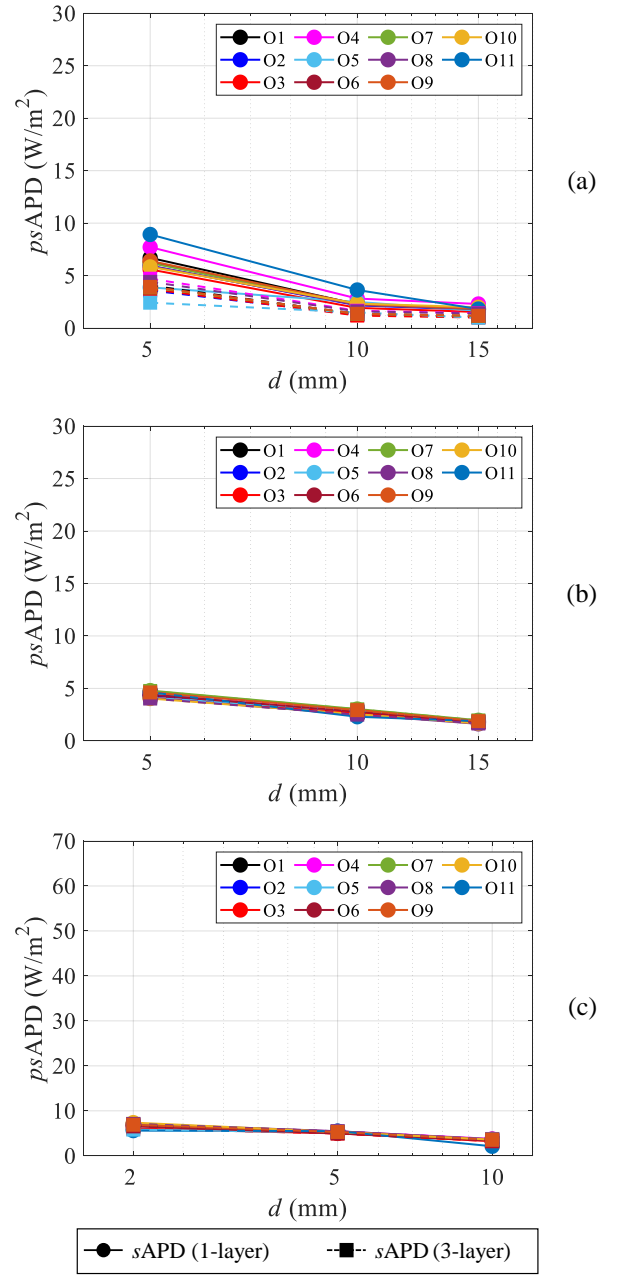


FIGURE 5. Spatially averaged epithelial/absorbed power density as a function of the antenna-to-skin separation distance for a dipole when $A = 4 \text{ cm}^2$ at frequencies of (a) 10, (b) 30, and (c) 90 GHz.

Particularly at 30 GHz, there are also significant variations in the numerical results from the different research groups. The maximum absolute differences of the $psAPD$ at 30 GHz increase to 5.49 and 4.27 dB at $d = 5 \text{ mm}$ when A is 1 and 4 cm^2 , respectively. At 90 GHz, the largest deviation of $psAPD$ changes at $d = 5 \text{ mm}$ to 2.75 and 2.74 dB, respectively, when A is 1 and 4 cm^2 . Furthermore, similar to the results of the dipoles in Figs. 4 and 5, the difference in the $psAPD$ values obtained using the one- and three-layer skin models is still small for the dipole arrays.

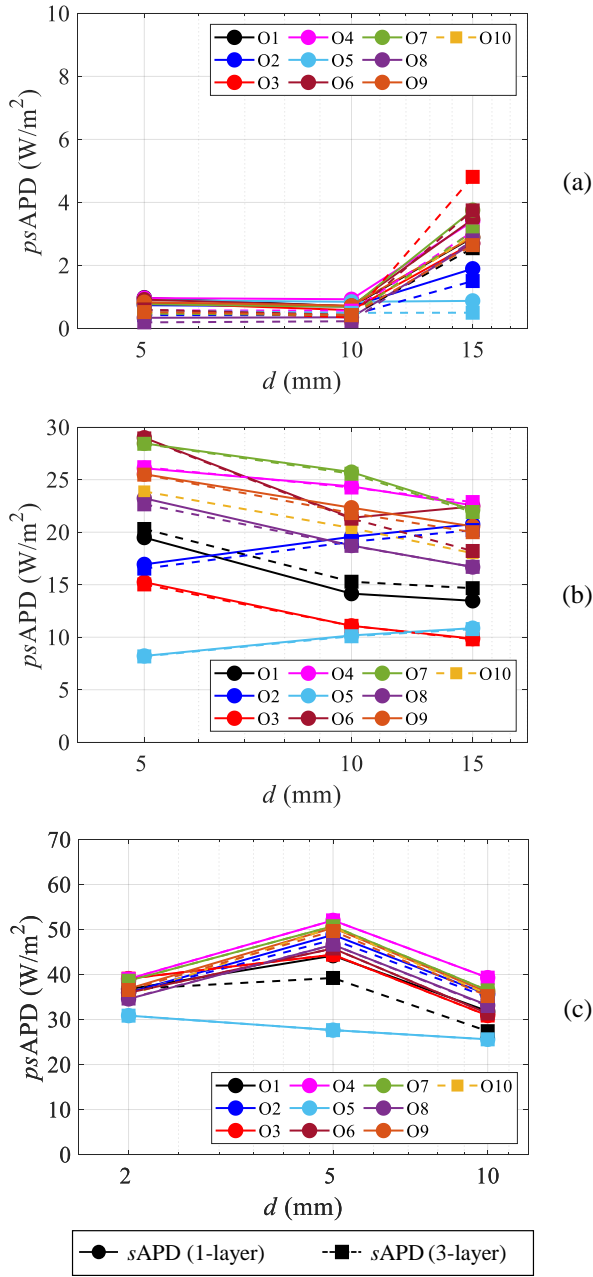


FIGURE 6. Spatially averaged epithelial/absorbed power density as a function of the antenna-to-skin separation distance for 4×4 dipole arrays when $A = 1 \text{ cm}^2$ at frequencies of (a) 10, (b) 30, and (c) 90 GHz.

Tables VIII and IX list the statistical mean values and standard deviations of $psAPD$ for cases of the dipole and dipole array, respectively. For the dipole source (Table VIII), the maximum RSD of the one-layer models were 20.0%, 8.03%, and 13.33%, which occurred at frequencies of 10 GHz when $d = 5 \text{ mm}$, 30 GHz when $d = 10 \text{ mm}$, and 90 GHz when $d = 10 \text{ mm}$.

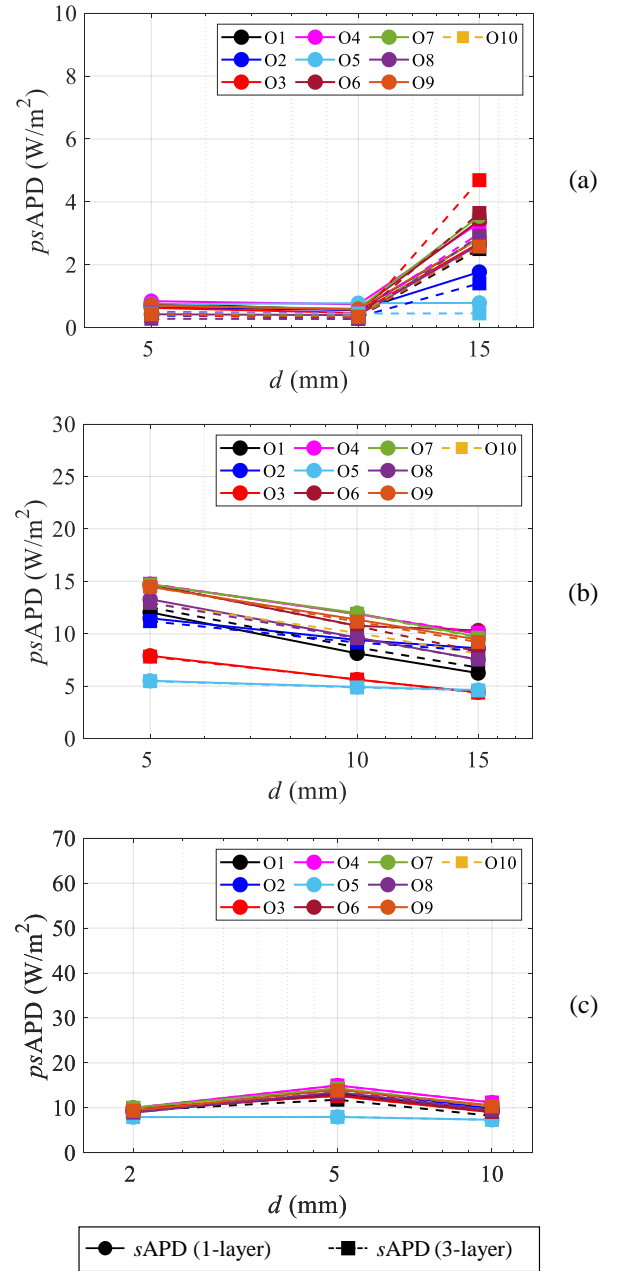


FIGURE 7. Spatially averaged epithelial/absorbed power density as a function of the antenna-to-skin separation distance for 4×4 dipole arrays when $A = 4 \text{ cm}^2$ at frequencies of (a) 10, (b) 30, and (c) 90 GHz.

When using the three-layer skin models, the corresponding maximum RSD were 17.39%, 5.77%, and 7.02%, which occurred at 10 GHz when $d = 5 \text{ mm}$, 30 GHz when $d = 5 \text{ mm}$, and 90 GHz when $d = 2 \text{ mm}$.

For the dipole array, as presented in Table IX, the maximum RSD of the one-layer models were 33.13%, 32.49%, and 12.07% at 10 GHz when $d = 15 \text{ mm}$, 30 GHz when $d = 5 \text{ mm}$, and 90 GHz when $d = 10 \text{ mm}$, respectively. When using the three-layer skin models, the corresponding maximum RSDs were within 42.55%, 29.55%, and 16.7%, respectively, at 10

GHz when $d = 15$ mm, 30 GHz when $d = 5$ mm, and 90 GHz when $d = 5$ mm.

The above results indicate no evident difference exists between the $psAPD$ values in the different organizations when using dipole antennas at 30 GHz and 90 GHz; however, some deviations occur at 10 GHz when $d = 5$ mm. The difference in the $psAPD$ from 11 organizations when using the 4×4 dipole array was relatively greater than that of the dipole at 30 and 90 GHz. Additionally, a significant difference is observed at 10 GHz when $d = 15$ mm.

These facts indicate that a difference in the numerical analysis of the spatial-average APD among various organizations may exist depending on the different antenna types at specific frequency ranges as well as antenna-to-skin separation distances, whereas the difference caused by the skin models is relatively marginal. Particularly, when using a dipole array at 30 GHz, relatively large deviations were observed, regardless of the skin models. To determine the skewness and tail weights of the data batches, statistical analysis of the significant differences in the calculated sPD s is conducted hereafter.

C. Statistical Analysis of the Significant Difference

The variations in the $psAPD$ values between the different groups in the previous sections suggest that they may be affected by the antennas types. In this section, the variability in $psAPD$ caused by antenna models is evaluated.

Figures 8 and 9 show the box plots of the calculated $psIPD$ and $psAPD$, respectively, as a function of the frequency from 10 to 90 GHz. The results are shown in Figs. 8 (a-b) and 9 (a-b), respectively, when using a half-wavelength dipole and 4×4 dipole array. In Figs. 8 and 9, the height of the rectangular box indicates the interquartile range (IQR), which is the range between the 75th and 25th percentiles. The horizontal line in the middle of the box denotes the statistical median value of $psPD$ from different groups. The error bars show the range of maximum to minimum values, where the plus sign indicates the outliers. Notably, for each box with error bars, three sets of antenna-to-skin separation distances (5, 10, and 15 mm or 2, 5, and 10 mm) and two types of skin models (one- and three-layer; or two definitions for $sIPD$, namely, $sIPD_n$ and $sIPD_{tot}$) were included. Therefore, the 11 research groups provided a maximum of 66 sets of data in each frequency band and averaging area, which was sufficient for statistical analysis.

In Fig. 8 (a), for the $sIPD$ values obtained using a dipole antenna, only one outlier was observed at 90 GHz when $A = 4$ cm². When using a dipole array, as can be seen in Fig. 8 (b), four outliers appear at 10 GHz. However, the IQRs of the $sIPD$ values for the dipole array cases are much smaller than those of the dipole antennas. For the $psAPD$ values obtained using the dipole antennas, as illustrated in Fig. 9 (a), two outliers occurred at 10 GHz when $A = 4$ cm². When the dipole array was used, there were no outliers. Conversely, the IQRs of the $psAPD$ values for the dipole arrays at 30 and 90 GHz are comparable or even larger than those of the dipole antennas,

particularly when $A = 1$ cm². However, the deviation caused by the numerical calculation error is not evident for both the $psIPD$ and $psAPD$ values.

TABLE VIII
MEAN VALUES AND STANDARD DEVIATIONS OF SPATIALLY AVERAGED EPITHELIAL/ABSORBED POWER DENSITIES FOR DIPOLE ANTENNAS.

Distance (mm)	Frequency (GHz)	One-layer		Three-layer	
		$psAPD$ ($A=1\text{cm}^2$)	$psAPD$ ($A=4\text{cm}^2$)	$psAPD$ ($A=1\text{cm}^2$)	$psAPD$ ($A=4\text{cm}^2$)
5	10	15.27 ± 2.67	6.31 ± 1.26	9.62 ± 1.67	3.85 ± 0.64
10		3.95 ± 0.45	2.42 ± 0.46	2.34 ± 0.21	1.4 ± 0.15
15		2.51 ± 0.27	1.83 ± 0.19	1.57 ± 0.18	1.16 ± 0.15
5	30	12.0 ± 0.68	4.39 ± 0.26	11.93 ± 0.64	4.38 ± 0.25
10		4.84 ± 0.36	2.74 ± 0.22	4.91 ± 0.24	2.79 ± 0.15
15		2.53 ± 0.13	1.8 ± 0.11	2.53 ± 0.11	1.81 ± 0.09
2	90	24.44 ± 2.04	6.67 ± 0.59	24.76 ± 1.68	6.71 ± 0.47
5		14.39 ± 0.43	5.27 ± 0.18	14.29 ± 0.43	5.24 ± 0.18
10		6.06 ± 0.8	3.42 ± 0.46	6.25 ± 0.22	3.54 ± 0.16

Unit: W/m².

TABLE IX
MEAN VALUES AND STANDARD DEVIATIONS OF SPATIALLY AVERAGED EPITHELIAL/ABSORBED POWER DENSITIES FOR DIPOLE ANTENNA ARRAYS.

Distance (mm)	Frequency (GHz)	One-layer		Three-layer	
		$psAPD$ ($A=1\text{cm}^2$)	$psAPD$ ($A=4\text{cm}^2$)	$psAPD$ ($A=1\text{cm}^2$)	$psAPD$ ($A=4\text{cm}^2$)
5	10	0.81 ± 0.19	0.69 ± 0.12	0.5 ± 0.12	0.42 ± 0.06
10		0.69 ± 0.16	0.58 ± 0.12	0.42 ± 0.09	0.35 ± 0.06
15		2.73 ± 0.88	2.65 ± 0.88	2.77 ± 1.16	2.69 ± 1.15
5	30	21.35 ± 6.94	12.09 ± 3.33	22.41 ± 6.62	12.65 ± 2.96
10		18.61 ± 5.63	9.3 ± 2.61	19.4 ± 4.69	9.7 ± 2.16
15		17.7 ± 5.13	7.87 ± 2.29	18.0 ± 3.8	7.98 ± 1.68
2	90	36.41 ± 2.59	9.33 ± 0.66	36.37 ± 2.58	9.33 ± 0.65
5		45.62 ± 7.31	13.08 ± 2.05	44.87 ± 7.5	12.87 ± 2.06
10		33.36 ± 4.03	9.6 ± 1.1	32.698 ± 4.37	9.4 ± 1.17

Unit: W/m².

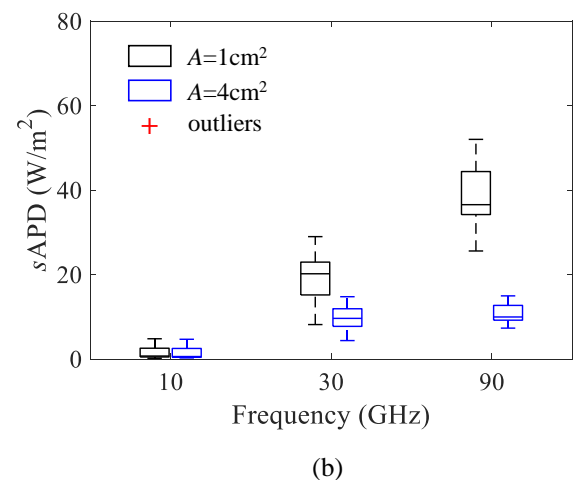
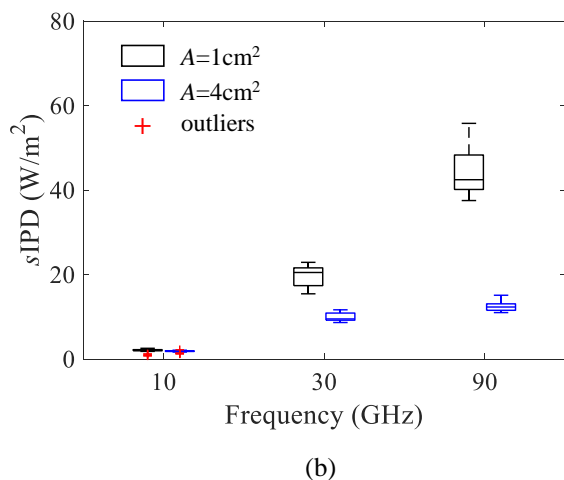
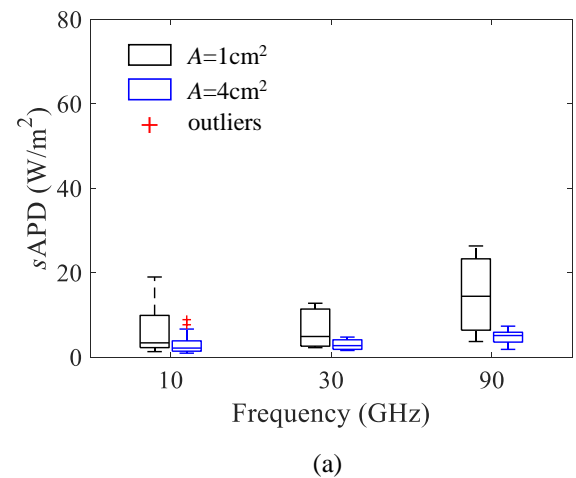
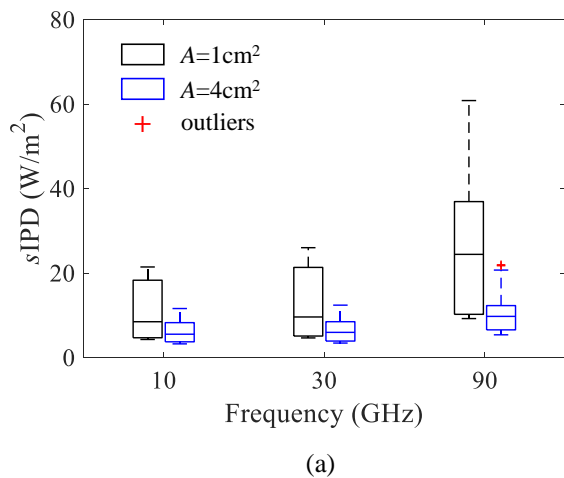


FIGURE 8. Statistical analysis of sIPD as a function of frequency from 10 to 90 GHz considering all the potential effects caused by the EM-method, antenna-to-skin separation distance, definition of power density, and averaging area: (a) single dipole and (b) 4×4 dipole arrays.

FIGURE 9. Statistical analysis of sAPD as a function of frequency from 10 to 90 GHz considering all the potential effects caused by the EM-method, antenna-to-skin separation distance, definition of power density, and averaging area: (a) single dipole and (b) 4×4 dipole arrays.

D. Variability of APD for the Dipole Array at 30 GHz

As shown in Figs. 6 (b) and 7 (b), relatively large variations in the $psAPD$ values occurred when using the 4×4 dipole array antennas at 30 GHz. In this section, the variability in the $psAPD$ caused by the number of dipole antenna elements is evaluated.

Figures 10 and 11 show the calculated $psIPD$ and $psAPD$ values, respectively, as a function of the antenna-to-skin separation distance d at 30 GHz, which were provided by O1. For simplicity, only the results for $sIPD_{tot}$ are shown in Fig. 10. Figs. 10 (a-b) and 11 (a-b) denote the average areas of 1 and 4 cm^2 , respectively. To evaluate the impact of the number of antenna arrays, three different antenna types—half-wavelength single dipole, 2×2 , and 4×4 dipole arrays—were compared.

As shown in Fig. 10 (a), all the results of $psIPD$ smoothly change with an increase in the antenna-to-skin separation d . For the single dipole and 2×2 dipole arrays, the trends are close to monotonically decreasing as d increases. For the case of the 4×4 dipole array, the curve first exhibits an upward trend and then slowly declines as d increases. This may be due to the increased number of antenna arrays or dimensions, which changes the boundary conditions of the near field. However, when $A = 4 cm^2$, the above changes become less observable, as illustrated in Fig. 10 (b).

However, in Fig. 11 (a), the curves of $psAPD$ when using the dipole arrays show evident periodic fluctuations as d increases. Particularly, at integer multiples of half wavelength, that is, 10 mm at 30 GHz, some bursts can be observed. This phenomenon did not change as the average area increased from 1 to 4 cm^2 , as shown in Fig. 11 (b).

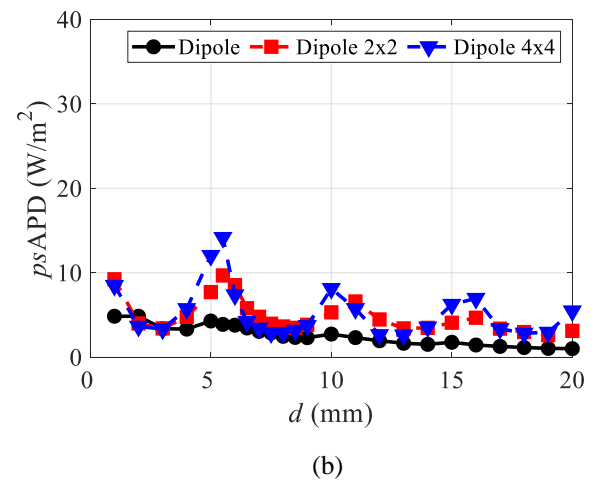
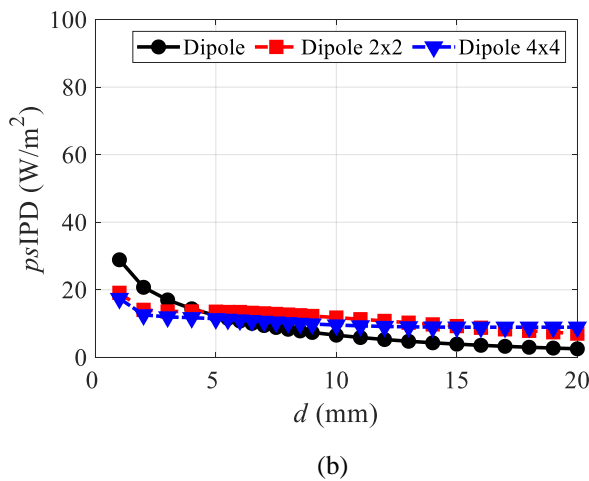
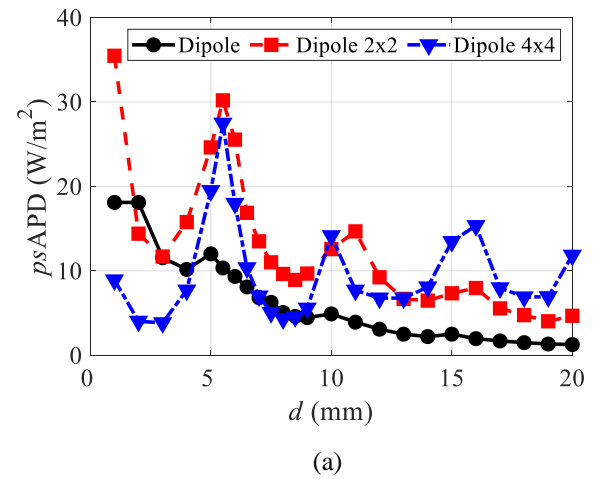
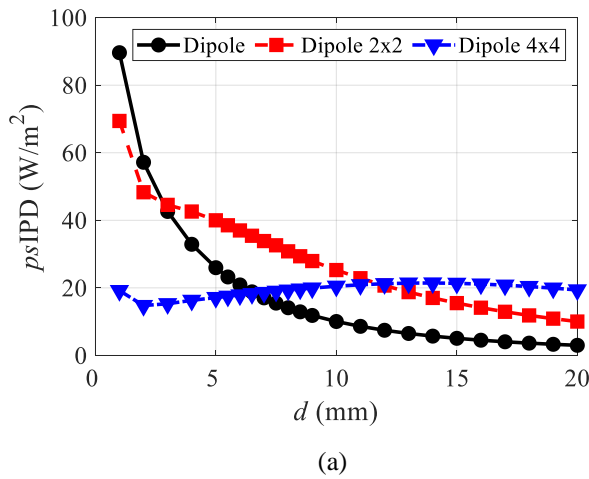


FIGURE 10. $psIPD_{tot}$ as a function of the antenna-to-skin separation distance with different antenna types of the single dipole, 2×2 , and 4×4 dipole arrays at 30 GHz averaged over (a) 1 cm^2 and (b) 4 cm^2 .

FIGURE 11. $sAPD$ as a function of antenna-to-skin separation distance with different antenna types of single dipole, 2×2 , and 4×4 dipole arrays at 30 GHz averaged over (a) 1 cm^2 and (b) 4 cm^2 .

From the above results, it is deduced that, unlike the results of $psAPD$ when using a single dipole, an increase in the number of dipole arrays may significantly change the mutual interaction between the antennas and skin models. This eventually results in a calculation error of $psAPD$ at 5, 10, or 15 mm at 30 GHz, which corresponds well with the relatively large deviation shown in Figs. 6 (b) and 7 (b).

E. Variability of APD Definition

In this intercomparison study, the formula for deriving the $sAPD$ was not unified among all research groups. Therefore, it is necessary to discuss the difference in the calculated $sAPD$ caused by the two definitions in (1) and (2), that is, the volumetric integral for the entire skin model and surface integral of the normal component of the Poynting vector perpendicular to the skin model, respectively, as recommended by the ICNIRP exposure guidelines [6].

Tables X and XI list the results of the maximum absolute difference in $psAPD$ ($\Delta psAPD$) due to different definitions using dipole and dipole array antennas evaluated by O6 and O8, which employed the numerical methods of the FDTD and FEM, respectively. The same separation-distance conditions and skin models were used.

In Table X, for the FDTD method, the maximum $\Delta psAPD$ caused by the use of different equations are within 0.2 dB for the dipole and dipole array at frequencies within 10–90 GHz when one-layer skin models are employed. When using the three-layer models, the corresponding difference did not exceed 0.51 dB. When using the FEM method, as shown in Table XI, the maximum $\Delta psAPD$ slightly increases to within 0.49 and 0.51 dB, respectively, for cases of the dipole and dipole array at 10–90 GHz when the one-layer skin models are used. The corresponding difference is up to 0.69 and 1.3 dB, respectively, when using the three-layer skin models.

TABLE X
MAXIMUM ABSOLUTE DIFFERENCE IN SPATIALLY AVERAGED
EPITHELIAL/ABSORBED POWER DENSITIES DUE TO DIFFERENT DEFINITIONS
USING DIPOLES AND DIPOLE ARRAYS INVESTIGATED USING FDTD METHOD.

Distance (mm)	Frequency (GHz)	One-layer		Three-layer	
		$\Delta psAPD$ ($A=1\text{cm}^2$)	$\Delta psAPD$ ($A=4\text{cm}^2$)	$\Delta psAPD$ ($A=1\text{cm}^2$)	$\Delta psAPD$ ($A=4\text{cm}^2$)
Dipole	10	0.13 dB	0.04 dB	0.51 dB	0.26 dB
	30	0.13 dB	0.16 dB	0.11 dB	0.16 dB
	90	0.19 dB	0.2 dB	0.19 dB	0.2 dB
Dipole Array	10	0.12 dB	0.11 dB	0.41 dB	0.23 dB
	30	0.18 dB	0.18 dB	0.17 dB	0.17 dB
	90	0.19 dB	0.2 dB	0.19 dB	0.2 dB

TABLE XI
MAXIMUM ABSOLUTE DIFFERENCE IN SPATIALLY AVERAGED
EPITHELIAL/ABSORBED POWER DENSITIES DUE TO DIFFERENT DEFINITIONS
USING DIPOLES AND DIPOLE ARRAYS INVESTIGATED USING FEM METHOD.

Distance (mm)	Frequency (GHz)	One-layer		Three-layer	
		$\Delta psAPD$ ($A=1\text{cm}^2$)	$\Delta psAPD$ ($A=4\text{cm}^2$)	$\Delta psAPD$ ($A=1\text{cm}^2$)	$\Delta psAPD$ ($A=4\text{cm}^2$)
Dipole	10	0.46 dB	0.42 dB	0.09 dB	0.69 dB
	30	0.49 dB	0.46 dB	0.46 dB	0.43 dB
	90	0.13 dB	0.12 dB	0.18 dB	0.17 dB
Dipole Array	10	0.15 dB	0.25 dB	1.3 dB	0.91 dB
	30	0.51 dB	0.5 dB	0.46 dB	0.46 dB
	90	0.23 dB	0.22 dB	0.22 dB	0.21 dB

IV. Discussion and Conclusion

Compared with the intercomparison study of previous WG [41] [42], this study unified simulation conditions to the extent possible, such as the antenna type for the radiation source, planar skin model, and dielectric constants of body tissues, to minimize the number of variables that may affect the fairness of the intercomparison results. Moreover, the number of research groups as well as the EM-simulation algorithm have increased from the last 6 to 11. We believe that the established exposure scenarios considered in this study are more accurate and rigorous for clarifying the validity of the APD averaging

method, which will be very informative for the next intercomparison of dosimetry analysis using more realistic body models.

In the first step of the intercomparison of the peak value of spatially averaged incident power densities, that is, $psIPD_n$ and $psIPD_{tot}$, all the results provided by the eleven groups showed good agreement with each other. For the cases using dipole antennas, the maximum RSDs among the different organizations were 4.04%, 2.58%, and 4.84% at frequencies of 10, 30, and 90 GHz, respectively. For the dipole array, the maximum RSDs did not exceed 23.55%, 5.0%, and 5.26% at frequencies of 10, 30, and 90 GHz, respectively. Relatively large deviations of up to 23.55% were observed for the dipole arrays at 10 GHz when $d = 5$ mm. For a large dimension of an array with 16 dipole elements, this distance can be regarded as an extreme near-field at 10 GHz. In this case, it is understandable that the difference in the electromagnetic field distribution obtained by different simulation methods increases owing to different approaches for solving Maxwell equations with different boundary conditions and resolutions. Additionally, the maximum RSDs of all the results did not exceed 5.26%. The above results are in agreement with the outcomes from a previous study (Tables 6 and 7 in [42]), demonstrating the effectiveness of all the employed methods for the EM simulation of the antenna near-field distribution.

As the second step of intercomparison for the peak value of spatially averaged epithelial/absorbed power densities, that is, $psAPD$, an excellent agreement for the considered exposure scenarios using a dipole antenna can still be observed. At frequencies of 10, 30, and 90 GHz, the maximum RSDs among different organizations were 18.83%, 8.03%, and 13.33%, respectively, for both the one- and three-layer skin models. When using dipole arrays as the radiation source, relatively obvious deviations in the calculated $psAPD$ are shown in several scenarios (e.g., 10 GHz at $d = 15$ mm, 30 GHz when d is from 5 to 15 mm, and 90 GHz at $d = 10$ mm). Despite this, the maximum RSDs for the cases using the dipole arrays did not exceed 42.55%, 29.55%, and 16.7%, respectively, at frequencies of 10, 30, and 90 GHz, regardless of the skin model. Based on the statistical significance analysis, the number of outliers is very small compared to the overall sample of the calculated data, including all the parameters of the antenna types, skin models, and separation distance. Furthermore, it is confirmed that the maximum difference caused by the equations of deriving the $sAPD$ recommended by the ICNIRP exposure guidelines, i.e., the volumetric integral for the entire skin model and surface integral of the normal component of the Poynting vector perpendicular to the skin model, is generally approximately 0.5 to 1 dB or even less. The difference depends on the calculation condition, e.g., field segmentation; here, we found that the difference can be suppressed to approximately 0.2 dB or lower in almost all exposure scenarios.

This study represents the first intercomparison of the calculated $sAPD$ in a simplified body model for exposure from

different antennas ranging from 10 GHz to 90 GHz. The main causes of variance in the numerical calculations in the dosimetry analysis of *psAPD* were evaluated using an objective comparison of the analysis results from different research groups. The fair agreement among the intercomparison results demonstrated that deviations caused by the numerical method, definition, and spatial average of the calculated *psAPD* using planar skin models are marginal. However, with the increasing number of antenna arrays, the dependence on the antenna types that are used as the radiation sources for the dosimetry analysis of *sAPD* may be slightly increased.

REFERENCES

- [1] A. Hirata *et al.*, "Assessment of human exposure to electromagnetic fields: Review and future directions," *IEEE Trans. Electromagn. Compat.*, vol. 63, no. 5, pp. 1619–1630, Oct. 2021.
- [2] W. H. Bailey *et al.*, "Synopsis of IEEE std C95. 1™-2019 'IEEE standard for safety levels with respect to human exposure to electric, magnetic, and electromagnetic fields, 0 Hz to 300 GHz,'" *IEEE Access*, vol. 7, pp. 171346–171356, 2019.
- [3] M. Zhadobov, *et al.*, "Millimeter-wave interactions with the human body: State of knowledge and recent advances," *Int. J. Microw. Wireless Technol.*, vol. 3, no. 2, pp. 237–247, Mar. 2011.
- [4] T. Wu, *et al.*, "Editorial: Human Exposure to New-Emerging Electric, Magnetic and Electromagnetic Fields," *Frontiers in Public Health - Radiation and Health*, vol. 10, Art. no. 894624, Apr. 2022.
- [5] IEEE-C95.1, *IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic and Electromagnetic Fields, 0 Hz to 300 GHz*. NY, USA, 2019.
- [6] ICNIRP, "Guidelines for Limiting Exposure to Electromagnetic Fields (100 kHz to 300 GHz)," *Health Phys.*, vol. 118, no. 5, pp. 483–524, 2020.
- [7] K. R. Foster, and D. Colombi, "Thermal response of tissue to RF exposure from canonical dipoles at frequencies for future mobile communication systems," *Electron. Lett.*, vol. 53, no. 5, pp. 360–362, Mar. 2017.
- [8] K. R. Foster, M. C. Ziskin, and Q. Balzano, "Thermal modeling for the next generation of radiofrequency exposure limits: Commentary," *Health Phys.*, vol. 113, no. 1, pp. 41–53, Jul. 2017.
- [9] M. C. Ziskin, S. I. Alekseev, K. R. Foster, and Q. Balzano, "Tissue models for RF exposure evaluation at frequencies above 6 GHz," *Bioelectromagnetics*, vol. 39, no. 3, pp. 173–189, Apr. 2018.
- [10] K. R. Foster, M. C. Ziskin, Q. Balzano, and A. Hirata, "Transient thermal responses of skin to pulsed millimeter waves," *IEEE Access*, vol. 8, pp. 130239–130251, Jul. 2020.
- [11] K. R. Foster, M. C. Ziskin, and Q. Balzano, "Time-temperature thresholds and safety factors for thermal hazards from radiofrequency energy above 6GHz," *Health Phys.*, vol. 121, no. 3, pp. 234–247, Sep. 2021.
- [12] K. R. Foster, M. C. Ziskin, and Q. Balzano, "Thermal response of human skin to microwave energy: A critical review," *Health Phys.*, vol. 111, no. 6, pp. 528–541, Dec. 2016.
- [13] S. I. Alekseev, A. A. Radzievsky, M. K. Logani, and M. C. Ziskin, "Millimeterwave dosimetry of human skin," *Bioelectromagnetics*, vol. 29, no. 1, pp. 65–70, Jan. 2008.
- [14] A. Kanezaki, A. Hirata, S. Watanabe, and H. Shirai, "Effects of dielectric permittivities on skin heating due to millimeter wave exposure," *Biomed. Eng. OnLine*, vol. 8, no. 1, p. 20, 2009.
- [15] A. Kanezaki, A. Hirata, S. Watanabe, and H. Shirai, "Parameter variation effects on temperature elevation in a steady-state, one-dimensional thermal model for millimeter wave exposure of one-and three-layer human tissue," *Phys. Med. Biol.*, vol. 55, no. 16, pp. 4647–4659, Jul. 2010.
- [16] K. Sasaki, M. Mizuno, K. Wake, and S. Watanabe, "Monte Carlo simulations of skin exposure to electromagnetic field from 10 GHz to 1 THz," *Phys. Med. Biol.*, vol. 62, no. 17, pp. 6993–7010, Aug. 2017.
- [17] K. Li, K. Sasaki, S. Watanabe, and H. Shirai, "Relationship between power density and surface temperature elevation for human skin exposure to electromagnetic waves with oblique incidence angle from 6 GHz to 1 THz," *Phys. Med. Biol.*, vol. 64, no. 6, Mar. 2019, Art. no. 065016.
- [18] K. Li, "Multivariate Regression Analysis of Skin Temperature Rises for Millimeter-Wave Dosimetry," *IEEE Trans. Electromagn. Compat.*, vol. 64, no. 4, pp. 941–950, Aug. 2022.
- [19] K. Li, and K. Sasaki, "Monte Carlo simulation of clothed skin exposure to electromagnetic field with oblique incidence angles at 60 GHz," *Frontiers. Public Health-Radiat. Health*, vol. 10, Feb. 2022, Art. no. 795414.
- [20] A. Christ, T. Samaras, E. Neufeld, and N. Kuster, "RF-induced temperature increase in a stratified model of the skin for plane-wave exposure at 6–100 GHz," *Radiat. Protection Dosimetry*, vol. 188, no. 3, pp. 350–360, Mar. 2020.
- [21] G. Sacco, S. Pisa, and M. Zhadobov, "Impact of textile on electromagnetic power and heating in near-surface tissues at 26 GHz and 60 GHz," *IEEE J. Electromagnetics, RF Microw. Med. Biol.*, vol. 5, no. 3, pp. 262–268, Sep. 2021.
- [22] W. He, B. Xu, M. Gustafsson, Z. Ying, and S. He, "RF compliance study of temperature elevation in human head model around 28 GHz for 5G user equipment application: Simulation analysis," *IEEE Access*, vol. 6, pp. 830–838, Feb. 2018.
- [23] K. Sasaki, K. Li, J. Chakarothai, T. Iyama, T. Onishi, and S. Watanabe, "Error Analysis of a Near-Field Reconstruction Technique Based on Plane Wave Spectrum Expansion for Power Density Assessment Above 6 GHz," *IEEE Access*, vol. 7, pp. 11591–11598, 2019.
- [24] Y. Diao, and A. Hirata, "Exposure Assessment of Array Antennas at 28 GHz Using Hybrid Spherical Near-Field Transformation and FDTD Method," *IEEE Trans. Electromagn. Compat.*, vol. 63, no. 5, pp. 1690–1698, Oct. 2021.
- [25] S. Omi, K. Sasaki, and K. Wake, "Performance Analysis of Incident Power Density Evaluation by Inverse Source Method for Compliance Assessment at Quasi-Millimeter and Millimeter Wave Bands," *IEEE Trans. Electromagn. Compat.*, vol. 63, no. 5, pp. 1649–1657, Oct. 2021.
- [26] B. Xu, K. Zhao, Z. Ying, D. Sjöberg, W. He, S. He, "Analysis of Impacts of Expected RF EMF Exposure Restrictions on Peak EIRP of 5G User Equipment at 28 GHz and 39 GHz Bands," *IEEE Access*, vol. 7, pp. 20996–21005, Feb. 2019.
- [27] D. Colombi, B. Thors, C. Törnevik, and Q. Balzano, "RF energy absorption by biological tissues in close proximity to mmW 5G wireless equipment," *IEEE Access*, vol. 6, pp. 4974–4981, 2018.
- [28] E. Carrasco, D. Colomb, K. R. Foster, M. C. Ziskin, and Q. Balzano, "Exposure Assessment of Portable Wireless Devices above 6 GHz," *Radiation Protection Dosimetry*, vol. 183, no. 4, pp. 489–496, Jun. 2019.
- [29] B. Thors, D. Colombi, Z. Ying, T. Bolin, and C. Törnevik, "Exposure to RF EMF from array antennas in 5G mobile communication equipment," *IEEE Access*, vol. 4, pp. 7469–7478, Aug. 2016.
- [30] D. Funahashi, T. Ito, A. Hirata, T. Iyama, and T. Onishi, "Averaging area of incident power density for human exposure from patch antenna arrays," *IEICE Trans. Electron.*, vol. E101.C, no. 8, pp. 644–646, Aug. 2018.
- [31] N. Miura, S. Kodera, Y. Diao, J. Higashiyama, Y. Suzuki, and A. Hirata, "Power absorption and skin temperature rise from simultaneous near-field exposure at 2 and 28GHz," *IEEE Access*, vol. 9, pp. 152140–152149, Nov. 2021.
- [32] A. Hirata *et al.*, "Human exposure to radiofrequency energy above 6GHz: Review of computational dosimetry studies," *Phys. Med. Biol.*, vol. 66, no. 8, Apr. 2021, Art. no. 08TR01.
- [33] Y. Hashimoto, A. Hirata, R. Morimoto, S. Aonuma, I. Laakso, K. Jokela, and K. R. Foster, "On the averaging area for incident power density for human exposure limits at frequencies over 6 GHz," *Phys. Med. Biol.*, vol. 62, no. 8, pp. 3124–3138, 2017.
- [34] T. Nakae, D. Funahashi, J. Higashiyama, T. Onishi, and A. Hirata, "Skin Temperature Elevation for Incident Power Densities From Dipole Arrays at 28 GHz," *IEEE Access*, vol. 8, pp. 26863–26871, Jan. 2020.

- [35] A. L. Kapetanović, D. Poljak, "Assessment of Incident Power Density on Spherical Head Model up to 100 GHz," *IEEE Trans. Electromagn. Compat.*, Jul. 2022.
- [36] A. Hirata, D. Funahashi, and S. Kodera, "Setting exposure guidelines and product safety standards for radio-frequency exposure at frequencies above 6 GHz: Brief review," *Ann. Telecommun.*, vol. 74, no. 1-2, pp. 17–24, Feb. 2019.
- [37] R. Morimoto, and A. Hirata, "Assessment of incident power density in different shapes of averaging area for radio-frequency exposure above 6 GHz," *Phys. Med. Biol.*, vol. 67, Oct. 2022. Art. no. 215014.
- [38] N. Miura, S. Kodera, Y. Diao, J. Higashiyama, Y. Suzuki, and A. Hirata, "Power absorption and skin temperature rise from simultaneous near-field exposure at 2 and 28 GHz," *IEEE Access*, vol. 9, pp. 152140–152149, Nov. 2021.
- [39] Y. Diao, A. Hirata, "Assessment of mmWave exposure from antenna based on transformation of spherical wave expansion to plane wave expansion," *IEEE Access*, vol. 9, pp. 111608–111615, Aug. 2021.
- [40] M. Ziane, M. Zhadobov, and R. Sauleau, "High-Resolution Technique for Near-Field Power Density Measurement Accounting for Antenna/Body Coupling at Millimeter Waves," *IEEE Antennas Wireless Propag. Lett.*, vol. 20, no. 11, pp. 2151–2155, Nov. 2021.
- [41] IEEE Std 2889™, *IEEE Guide for the Definition of Incident Power Density to Correlate Surface Temperature Elevation*, Dec. 2021.
- [42] K. Li *et al.*, "Intercomparison of calculated incident power density and temperature rise for exposure from different antennas at 10-90 GHz," *IEEE Access*, vol. 9, pp. 151654–151666, Nov. 2021.
- [43] Y. Diao, K. Li, K. Sasaki, K. Sachiko, I. Laakso, W. E. Hajj, and A. Hirata, "Effect of Incidence Angle on the Incident Power Density Definition to Correlate Skin Temperature Rise for Millimeter Wave Exposures," *IEEE Trans. Electromagn. Compat.*, vol. 63, no. 5, pp. 1709–1716, Oct. 2021.
- [44] D. Funahashi, A. Hirata, S. Kodera, and K. R. Foster, "Area-averaged transmitted power density at skin surface as metric to estimate surface temperature elevation," *IEEE Access*, vol. 6, pp. 77665–77674, Nov. 2018.
- [45] Y. Diao, E. A. Rashed, and A. Hirata, "Assessment of absorbed power density and temperature rise for nonplanar body model under electromagnetic exposure above 6 GHz," *Phys. Med. Biol.*, vol. 65, no. 22, pp. 224001, Nov. 2020.
- [46] K. Li, K. Sasaki, K. Wake, T. Onishi, and S. Watanabe, "Quantitative comparison of power densities related to electromagnetic near-field exposures with safety guidelines from 6 to 100GHz," *IEEE Access*, vol. 9, pp. 115801–115812, Aug. 2021.
- [47] G. Sacco, Z. Haider, and M. Zhadobov, "Exposure Levels Induced in Curved Body Parts at mmWaves," *IEEE J. Electromagnetics, RF Microw. Med. Biol.*, vol. 6, no. 3, pp. 413–419, Jun. 2022.
- [48] K. Taguchi, S. Kodera, A. Hirata, and T. Kashiwa, "Computation of Absorbed Power Densities in High-Resolution Head Models by Considering Skin Thickness in Quasi-Millimeter and Millimeter Wave Bands," *IEEE J. Electromagnetics, RF Microw. Med. Biol.*, Sep. 2022.
- [49] B.B. Beard, *et al.*, "Comparisons of computed mobile phone induced SAR in the SAM phantom to that in anatomically correct models of the human head" *IEEE Trans. Electromagn. Compat.*, vol. 48, no. 2, pp. 397–407, Jun. 2006.
- [50] S. Gabriel, R. W. Lau, and C. Gabriel, "The dielectric properties of biological tissues: III. Parametric models for the dielectric spectrum of tissues," *Phys. Med. Biol.*, vol. 41, no. 11, pp. 2271–2293, Nov. 1996.
- [51] C. Gabriel, "Compilation of the dielectric properties of body tissues at RF and microwave frequencies," Technical Report N.AL/OE-TR-1996-0037, Occupational and Environmental Health Directorate Radiofrequency Radiation Division, Brooks Air Force Base, Texas, 1996.
- [52] P. A. Hasgall, *et al.*, IT'IS Database for thermal and electromagnetic parameters of biological tissues, version 4.0, May 15, 2018. <http://www.itis.swiss/database>.
- [53] A. Taflov and S. C. Hagness, *Computational Electrodynamics: The Finite-Difference Time-Domain Method*, Third Edit. ARTECH HOUSE, 2005.
- [54] D. Poljak, *Advanced Modeling in Computational Electromagnetic Compatibility*, John Wiley & Sons, Inc., New Jersey, 2007.
- [55] T. Weiland, "A Discretization Method for the Solution of Maxwell's Equations for Six-Component Fields," *Electronics and Communication, (AEÜ)*, Vol. 31, pp. 116, 1977.
- [56] T. Weiland, M. Timm, I. Munteanu, "A Practical Guide to 3D simulation", *IEEE Microw. Mag.*, vol. 9, Dec. 2008.
- [57] P. B. Johns, "A symmetrical condensed node for the TLM method", *IEEE Trans. Microw. Theory Techn.*, vol. MTT-35, no. 4, pp. 370–377, 1987.



KUN LI (S'13-M'17) received the B.E. degree in communication engineering from the Nanjing University of Posts and Telecommunications, Nanjing, China, in 2011, and the M.E. and Ph.D. degrees in electrical engineering from the University of Toyama, Toyama, Japan, in 2014 and 2017, respectively.

From 2017 to 2019, he was a Researcher with the Electromagnetic Compatibility Laboratory, National Institute of Information and Communications Technology, Tokyo, Japan. In 2020, he joined Kagawa University, Japan, where he currently works as Assistant Professor. He is now a Visiting Researcher with CNRS/IETR, University of Rennes 1, Rennes, France. His research interests include safety assessment of radio frequency radiation exposure to the human body and bio-EMC issues in microwave, millimeter and THz bands, antenna design and over-the-air testing for wireless body area network system.

Dr. Li was the recipient of the Young Scientist Award of the URSI, in 2020, the Risaburo Sato Award of EMC Sapporo & AMPEC, in 2019, the IEEE AP-S Japan Student Award in 2015, and the IEICE Best Letter Award in 2017. He is a member of IEEE International Committee on Electromagnetic Safety TC95 and Co-Chair of Working Group 7 under Subcommittee 6 EMF Dosimetry Modeling established to study average schemes and assessment methods of absorbed power density. He is a senior member of URSI and a member of IEEE and IEICE.



SACHIKO KODERA (M'20) received the B.E. and M.E. degrees in electrical and computer engineering from the Nagoya Institute of Technology, Nagoya, Japan, in 2002 and 2006, respectively, and the Ph. D. degree in computer science from the Nagoya Institute of Technology, Nagoya, Japan, in 2019.

In 2016, she joined the Department of Electrical and Mechanical Engineering, Nagoya Institute of Technology. She is currently an Associate Professor. Her current research interests include electromagnetic and thermal dosimetry modeling in humans for radio frequency and ambient heat exposures.

She is a member of Subcommittee 6 in IEEE International Committee on Electromagnetic Safety (ICES) Technical Committee 95. She received the Prizes for Science and Technology (Public Understanding Promotion Category in 2020) from the Commendation for Science and Technology, Minister of Education, Culture, Sports, Science, and Technology, Japan, and Japan Open Innovation Prize (President of the Science Council of Japan Prize in 2022) from the Cabinet Office.



DRAGAN POLJAK (SM'13) received his PhD in el. Eng. in 1996 from the Univ. of Split, Croatia. He is the Full Prof. at Dept. of Electron. and Computing, Univ. of Split. His research interests are oriented to computational electromagnetics (electromagn. compatibility, bioelectromagnetics and plasma physics). To date Prof. Poljak has published more than 160 journ. and 250 conf. papers, and authored some books, e.g. two by Wiley, New Jersey and one by Elsevier, St Louis.

He is a Senior member of IEEE, a member of Editorial Board of Eng. Anal. with Boundary Elements, Math. Problems in Eng. And IET Sci. Measur. & Techn. He was awarded by several prizes for his achievements, such as National Prize for Science (2004), Croatian sect. of IEEE annual Award (2016), Technical Achievement Award of the IEEE EMC Society (2019) and George Green Medal from University of Mississippi (2021). From May 2013 to June 2021 Prof. Poljak was a member of the board of the Croatian Science Foundation. He is currently involved in ITER physics EUROfusion collab. and in Croatian center for excellence in research for tech. sciences. He is active in few Working Groups of IEEE/Internat. Committee on Electromagnetic Safety (ICES) Tech. Comm. 95 SC6 EMF Dosimetry Modeling.



ANNA ŠUŠNJARA (M'21) received her PhD degree in el. Eng. from the Univ. of Split, Croatia in 2021. She is a postdoc researcher at Dept. of Electron. and Computing, Univ. of Split. Her research interests include numerical modelling, uncertainty quantification and sensitivity analysis in computational electromagnetics, particularly in bioelectromagnetism.

Dr. Šušnjara was awarded with National Prize for Science (2021). In 2016 she received the best poster award at BioEM conference and spent one month at Politecnico di Torino as ACRI awardee in Young Investigator Training Program. She gave seminars/lectures about numerical modelling in computational electromagn. at several European academic institutions and tutorials at international scientific conferences. From 2015 until 2021 dr. Šušnjara was involved in ITER physics EUROfusion collab. In 2021 she joined a work group within IFMIF-DONES project. Dr. Šušnjara is a member of IEEE and EBEA societies. She currently serves as a Vice President of Croatian chapter of IEEE EMC society.

To date, dr. Anna Šušnjara authored and co-authored 16 journ. and more than 35 conf. papers. She serves as a reviewer to seven journals and two conferences. A complete list of her publications can be found at: <https://www.bib.irb.hr/pregled/znanstvenici/348056>.



YINLIANG DIAO (S'12–M'17) received the B. E. degree in Electronic Information Engineering from Chongqing University, Chongqing, China, in 2008, the M.S. degree in electronic engineering from the Beijing University of Posts and Telecommunications, Beijing, China, in 2011, and the Ph.D. degree in electronic engineering from the City University of Hong Kong, in 2016.

Since 2017, he has been an Assistant professor with South China Agricultural University, Guangzhou, China. From 2019 to 2021, he served as research assistant/associate professor in Nagoya Institute of Technology, where he is currently a guest associate professor. His current research interests include electromagnetic dosimetry modelling and electromagnetic compatibility.

He is a member of IEEE ICES Standards Coordinating Committee, and a member of the scientific expert group of International Commission on Non-Ionizing Radiation Protection. He was a recipient of the Young Scientist Award from URSI GASS 2020.



ALEXANDER PROKOP (M'07) received the M.S. degree in electrical engineering and the Ph.D. degree in computational electromagnetics from Technische Universität Darmstadt, Darmstadt, Germany, in 1997 and 2004, respectively.

He joined the R&D department of CST in 1998 and currently is Bioelectromagnetics Applications Director in SIMULIA R&D of Dassault Systèmes.

Since 2006, he participates in the development of several IEEE/IEC standards on simulation methods and human exposure assessment. Currently he is convenor of IEC TC 106 and IEEE ICES TC34 subcommittees and working groups on computational SAR assessment JMT 62704-3 for mobile phones and JMT 62704-4 using the Finite Element Method. In IEEE APS/SC he leads a working group within P2816 on simulation of antennas using the TLM method.

Besides exposure assessment, his research interests also cover anatomical human body modeling and computational biomedical simulation workflows.



KENSUKE SASAKI (M'21) received the B.E., M.E., and Ph.D. degrees in electrical and electronic engineering from Tokyo Metropolitan University, Tokyo, Japan, in 2006, 2008, and 2011, respectively.

He is currently with the National Institute of Information and Communications Technology (NICT), Tokyo, Japan. His research interests are electromagnetic theory, bioelectromagnetics, and dielectric properties measurement.

Dr. Sasaki was a member of Scientific Expert Group of International Commission on Non-Ionizing Radiation Protection (ICNIRP) from 2018 to 2020. He has been the Early Career Representative of Commission K, the International Scientific Radio Union (URSI) since 2017. He was the recipient of the 2009 Young Scientist Award of the URSI, the 2012 Best Paper Award of the IEEEJ, and the 2020 Achievement Award of the IEICE.



KENJI TAGUCHI received the B.E., M.E., and Ph.D. degrees in electrical and electronic engineering from Kitami Institute of Technology, Kitami, Japan, in 2001, 2003, and 2006, respectively.

From 2006 to 2009, he joined the Department of Information and Communication Engineering, Kumamoto National College of Technology, as an Assistant Professor. Since 2009, he has been an Associate Professor in the Department of Electrical and Electronic Engineering, Kitami Institute of Technology. His research interests include the analysis of electromagnetic fields, electromagnetic compatibility, and optimization problems. He is a secretary of Task Force under EMF Dosimetry Modeling of IEEE International Committee on Electromagnetic Safety.



JINGTIAN XI (M'11) received the B.E. and M.E. degree in electronic and information engineering from South China University of Technology, Guangzhou, China, in 2003 and 2006, respectively, and the Ph.D. degree in microelectronics and solid-state electronics from Fudan University, Shanghai, China, in 2009. From 2009 to 2017, he was a Senior Researcher in the Logistics and Supply Chain MultiTech R&D Centre (LSCM) founded by the Government of the Hong Kong Special Administrative Region and affiliated to Hong Kong University. Since 2017, he has been a Project Leader at the Foundation for Research on Information Technologies in Society (IT²S), Zurich, Switzerland. His current research interests include antenna design, RF dosimetry, verification and validation (V&V) of numerical/measurement solutions for assessing exposure from electromagnetic sources. He has authored and co-authored more than 30 publications in journals and conferences, and held five patents. He has served as a technical program committee (TPC) member for multiple conferences and a reviewer for various IEEE journals.



GIULIA SACCO (S'18-M'21) received the M.S. degree (summa cum laude) in biomedical engineering and the Ph.D. (cum laude and with the Doctor Europaeus label) in information and communication technology from Sapienza University of Rome, Rome, Italy, in 2017 and 2021, respectively. She is currently a Researcher and a Marie Curie Fellow with the Institut d'Électronique et des Technologies du numérique/French National Center for Scientific Research (CNRS), Rennes, France.

She was a Visiting Researcher with Stichting imec Eindhoven, The Netherlands from April 2019 to September 2019. Her scientific and research interests include the field of innovative biomedical applications of electromagnetic fields and radars for vital signs monitoring.

Dr. Sacco was the recipient of the "2022 Antennas and Propagation Society (AP-S) Fellowship", the "Bourse de jeunes chercheurs" Grant at XXXIV General Assembly and Scientific Symposium (GASS) of the International Union of Radio Science (Union Radio Scientifique Internationale-URSI) 2021, the Best Student Paper Award at the XXXIII General Assembly and Scientific Symposium (GASS) of the International Union of Radio Science (Union Radio Scientifique Internationale-URSI) 2020, and the Best Student Paper Award at Photonics & Electromagnetics Research Symposium (PIERS) 2019.



SHUAI ZHANG (SM'18) received the B.E. degree from the University of Electronic Science and Technology of China, Chengdu, China, in 2007 and the Ph.D. degree in electromagnetic engineering from the Royal Institute of Technology (KTH), Stockholm, Sweden, in 2013. After his Ph.D. studies, he was a Postdoc at KTH. In April 2014, he joined Aalborg University, Denmark, where he currently works as Associate Professor and the Head of Antenna Research Group. In 2010 and 2011, he was a Visiting Researcher at Lund University, Sweden and at Sony Mobile Communications AB, Sweden, respectively. He was also an external antenna specialist at Bang & Olufsen, Denmark from 2016-2017. He has coauthored over 100 articles in well-reputed international journals and over 16 (US or WO) patents. His current research interests include: mmwave antennas for cellular communications, biological effects, metasurfaces, CubeSat antennas, Massive MIMO antenna arrays, wireless sensors, and RFID antennas.



MAXIM ZHADOBOV (SM'21) received the Ph.D. and Habilitation à Diriger des Recherches degrees from the Institut d'Électronique et des Technologies du numérique (IETR), University of Rennes 1, Rennes, France, in 2006 and 2016, respectively. He was a Postdoctoral Researcher with the Center for Biomedical Physics, Temple University, Philadelphia, PA, USA, until 2008, and then joined the French National Center for Scientific Research (CNRS).

He is currently Senior Research Scientist with the IETR/CNRS in charge of the Electromagnetic Waves in Complex Media (eWAVES) research group. His research interests include innovative biomedical applications of electromagnetic fields and associated technologies. He has coauthored five book chapters, 85 research papers in peer-reviewed international journals, and more than 200 contributions to conferences and workshops. His review article in the International Journal of Microwave and Wireless Technologies was the most cited paper in 2016–2020. A paper published by his research group in 2019 is in journal Top 100 of Nature Scientific Reports.

He has been involved in 26 research projects (14 as PI). Dr. Zhadobov was the TPC Co-Chair of BioEM 2021/2020. He was a TPC member and/or session organizer at international conferences, including EUMW2022, IEEE IMBioC 2022, AT-AP-RASC 2022, BioEM 2019, EuMW 2019, IEEE iWEM 2017, MobiHealth 2015–2017, BodyNets 2016, and IMWS-Bio 2014. He was an elected member of EBEA Council from 2017 to 2021. Currently he is a member of IEEE TC95.4 and Vice-President of URSI France Commission K. He is an Associate Editor for IEEE Journal of Electromagnetics, RF and Microwaves in Medicine and Biology and served as Guest Editor of several special issues, including Human Exposure in 5G and 6G Scenarios of Applied Sciences and Advanced Electromagnetic Biosensors for Medical, Environmental and Industrial Applications of Sensors. He was also on review boards of more than 15 international journals and conferences, and has been acting as an expert at research councils worldwide. He was the recipient of the CNRS Medal in 2018, the EBEA Award for Excellence in Bioelectromagnetics in 2015, and Brittany's Young Scientist Award in 2010. Since 2010, the Ph.D. students he worked with have been recipients of seven national scientific awards and six awards from the Bioelectromagnetics Society, URSI, IEEE Antennas and Propagation and IEEE Microwave Theory and Technology Societies.



MING YAO (S'20) was born in 1994. He received the B.Eng. and M.Eng. degrees from the University of Electronic Science and Technology of China, Chengdu, China, in 2017 and 2020, respectively. He is currently working toward a Ph.D. degree in wireless communication with the Antennas, Propagation, and Millimeter-Wave Systems Section, Department of Electronic Systems, Aalborg University, Aalborg, Denmark. His current research interests include antenna design, holographic metasurface, EMF health and safety.



WALID EL HAJJ (M' 21) received a National Degree of Master for his Research in "Microwave materials and devices for communication systems" from Telecom Bretagne, Brest-France, in 2008. He received a Ph.D. degree on Information and Communications Sciences and Technologies from Telecom Bretagne, Brest-France in 2011. From 2011 to 2013, he was a Researcher in Microwave department of LabSTICC/MOM

laboratory at Telecom Bretagne.

Walid El Hajj joined Intel Corporation in 2014. He is currently Scientist Officer at the Wireless Test and Certification Center group. He is leading the different Research and Development activities related to new wireless technologies and products certification.

Dr. El Hajj is participating and leading several standardization efforts in the human exposure and product safety domain. He is mandated as expert in French Standardization Association (AFNOR). Since 2017, he participates in the development of several IEEE/IEC standards on human exposure computational and measurement assessments. He is member of IEC TC 106, and IEEE ICES TC95. He is the co-convener of IEC/IEEE JWG12 developing Measurement Methods standards to assess the power density in close proximity to the head and body from 6-300 GHz. He was the chair of WG 5 under SC 6 of IEEE ICES TC95 that published the guide IEEE 2889-2021 studying the different aspects of Incident Power Density Definition publishing. He is also member of CMC TF Radio group in IECCE.



AKIMASA HIRATA (S'98-M'01-SM'10-F'17) received the B.E. and M.E. degrees in in communications engineering from Osaka University, Suita, Japan, in 1996, 1998, and 2000, respectively.

From 1999 to 2001, he was a Research Fellow of the Japan Society for the Promotion of Science, and a Visiting Research Scientist at the University of Victoria, Victoria, BC, Canada, in 2000. In 2001, he joined the Department of Communications Engineering, Osaka University, as an Assistant Professor. In 2004, he joined, as an Associate Professor, the Department of Computer Science and Engineering, Nagoya Institute of Technology, where he is currently a Full Professor. His research interests include electromagnetic safety, risk management system for heat-related illness, methods in neuroscience, antennas, filters, and related computational techniques.

Prof. Hirata is an editorial board member of physics in medicine and biology, a member of the main commission and a Chair of project group of International Commission on Non-Ionizing Radiation Protection, and a member of administrative committee and a Subcommittee (EMF Dosimetry Modeling) Chair of IEEE International Committee on Electromagnetic Safety, and an expert of World Health Organization. From 2006 to 2012, he was also an Associate Editor of the IEEE TRANSACTIONS ON BIOMEDICAL ENGINEERING. He received several awards including Young scientists' Prize (2006) and Prizes for Science and Technology (Research Category in 2011, Public Understanding Promotion Category in 2014, 2020) by the Commendation for Science and Technology by the Minister of Education, Culture, Sports, Science, and Technology, Japan, and IEEE EMC-S Technical Achievement Award (2015), the Japan Academy Medal and JSPS Prize (2018), and Japan Open Innovation Prize (President of the Science Council of Japan Prize in 2022) from the Cabinet Office. He is a Fellow of Institute of Physics, and a member of IEICE, IEE Japan, and Bioelectromagnetics Society.