

## Optimizing Information Freshness via Multiuser Scheduling with Adaptive NOMA/OMA

Wang, Qian; He, Chen; Zhao, Changhong; Li, Yonghui ; Popovski, Petar; Vucetic, Branka

*Published in:*

I E E Transactions on Wireless Communications

*DOI (link to publication from Publisher):*

[10.1109/TWC.2021.3106778](https://doi.org/10.1109/TWC.2021.3106778)

*Publication date:*

2022

*Document Version*

Accepted author manuscript, peer reviewed version

[Link to publication from Aalborg University](#)

*Citation for published version (APA):*

Wang, Q., He, C., Zhao, C., Li, Y., Popovski, P., & Vucetic, B. (2022). Optimizing Information Freshness via Multiuser Scheduling with Adaptive NOMA/OMA. *I E E Transactions on Wireless Communications*, 21(3), 1766-1778. <https://doi.org/10.1109/TWC.2021.3106778>

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

### Take down policy

If you believe that this document breaches copyright please contact us at [vbn@aub.aau.dk](mailto:vbn@aub.aau.dk) providing details, and we will remove access to the work immediately and investigate your claim.

# Optimizing Information Freshness via Multiuser Scheduling with Adaptive NOMA/OMA

Qian Wang, He Chen, Changhong Zhao, Yonghui Li, Petar Popovski and Branka Vucetic

**Abstract**—This paper considers a wireless network with a base station (BS) conducting timely status updates to multiple clients via adaptive non-orthogonal multiple access (NOMA)/orthogonal multiple access (OMA). Specifically, the BS is able to adaptively switch between NOMA and OMA for the downlink transmission to optimize the information freshness of the network, characterized by the Age of Information (AoI) metric. For the simple two-client case, we formulate a Markov Decision Process (MDP) problem and develop the optimal policy for the BS to decide whether to use NOMA or OMA for each downlink transmission based on the instantaneous AoI of both clients. The optimal policy is shown to have a switching-type property with obvious decision switching boundaries. A suboptimal policy with lower computation complexity is also devised, which is shown to achieve near-optimal performance via numerical simulations. For the more general multi-client scenario, the optimal solution is the computationally intractable due to the large state and action spaces. As such, we devote to provide a feasible suboptimal policy with low computation complexity. Specifically, inspired by the proposed suboptimal policy of the two-client scenario, we formulate a nonlinear optimization problem to determine the optimal power allocated to each client by maximizing the expected AoI drop of the network in each time slot (i.e., minimizing the expected network-wide AoI of the next slot). The problem is shown to be non-convex, we manage to solve it by approximating it as a convex optimization problem. Simulation results validate the tightness of the adopted approximation. Specifically, the performance of the adaptive NOMA/OMA scheme by solving the convex optimization is shown to be close to that of the max-weight policy solved by exhaustive search. Besides, the adaptive NOMA/OMA scheme achieves significant performance improvement compared to the OMA scheme, especially when the number of clients in the network is large and the transmission SNR is high.

**Index Terms**—Information freshness, Age of Information, multiuser scheduling, non-orthogonal multiple access, Markov decision process and power allocation.

## I. INTRODUCTION

Recently, researchers have shown enormous interest (see, e.g., [2]–[19]) in a new performance metric, termed *Age of Information* (AoI), thanks to its capability in characterizing the timeliness of data transmission in status update systems. The timeliness of status update is of great importance, especially in real-time monitoring applications, in which the dynamics of the monitored processes need to be well grasped at the monitor side for further actions. The AoI is defined as the time elapsed since the generation time of the latest received status update at the destination [2]. According to this definition, the AoI is jointly determined by the transmission interval and the transmission delay.

Early work on the analysis and optimization of AoI in various networks has mainly focused on the simple single-source system model [2]–[11]. Recent efforts on AoI optimization pay more attention to the more general multi-source systems [12]–[21]. For systems with multiple sources, the AoI of each user depends on the transmission scheduling of all devices. In this line of research, the authors in [12] considered a base station (BS) receiving status updates from multiple nodes with a *generate-at-will* status arrival model in the uplink. A BS serving status updates to multiple nodes in the downlink with the randomly generated status update was investigated in [14]. Both of them derived the lower bound of the weighted sum of the expected AoI of the considered network and compared the lower bound with that of various suboptimal scheduling policies, including Whittle index policy and max-weight policy, etc. The authors in [16] also considered systems with stochastic status update arrivals and derived the Whittle index policy in closed form. A decentralized policy was proposed in [16], which was shown to achieve near-optimal performance. Different from the above work, joint sampling and scheduling were studied in [20] and [21], considering multiuser systems with uniform and non-uniform status packet sizes, respectively. Another branch of this research line is to analyze and optimize the AoI of the networks with random access protocols. Particularly, the AoI performance of slotted ALOHA was investigated in [15], [18] and that of Carrier Sense Multiple Access (CSMA) was investigated in [17].

All the aforementioned studies on AoI have concentrated on the orthogonal multiple access (OMA) scheme. That is, only one status update packet can be delivered and received

The work of H. Chen is supported in part by the RGC General Research Funds under Project 14205020 and the CUHK direct grant for research under Project 4055126. The work of C. Zhao was supported by RGC Early Career Award No. 24210220. The work of Y. Li was supported by ARC under Grant DP190101988 and DP210103410. The work of P. Popovski has been in part supported by the Danish Council for Independent Research, Grant Nr. 8022-00284B SEMIOTIC. The work of B. Vucetic was supported in part by the Australian Research Council Laureate Fellowship grant number FL160100032. Part of the paper was presented on IEEE ISIT 2020 [1].

Q. Wang is with School of Electrical and Information Engineering, The University of Sydney, Sydney, NSW 2006, Australia and Department of Information Engineering, The Chinese University of Hong Kong, Hong Kong SAR, China. The work is done when she is a visiting student at CUHK (email: qian.wang2@sydney.edu.au).

H. Chen and C. Zhao are with Department of Information Engineering, The Chinese University of Hong Kong, Hong Kong SAR, China (email: {he.chen, chzhao}@ie.cuhk.edu.hk).

Y. Li and B. Vucetic are with School of Electrical and Information Engineering, The University of Sydney, Sydney, NSW 2006, Australia (email: {yonghui.li, branka.vucetic}@sydney.edu.au).

P. Popovski is with the Department of Electronic Systems, Connectivity Section, Aalborg University, 9220 Aalborg, Denmark (email: petarp@es.aau.dk)

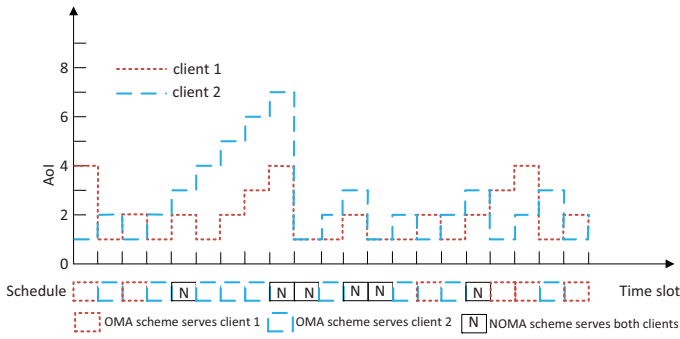


Figure 1: An illustration of AoI evolution for a two-client network under the adopted adaptive NOMA/OMA scheduling.

in each time slot. Very recently, the authors in [22] have for the first time investigated the potential of applying non-orthogonal multiple access (NOMA) in reducing the average AoI of a two-node network. The results in [22] showed that OMA and NOMA can outperform each other in different setups. In fact, NOMA has been regarded as a promising technique to deal with large-scale Internet of Thing (IoT) deployment [23]–[28]. The basic idea of NOMA is to leverage the power domain to enable multiple clients to be served at the same time or frequency band. Compared to OMA, NOMA has the potential to reduce AoI by improving spectrum utilization efficiency. Specifically, more than one client can be served by the BS using NOMA, resulting in a possible AoI drop of more than one client. However, in OMA, only the served client may have AoI drop and the AoI of all other clients will increase. In this context, a natural question arises: how should a multiuser system adaptively switch between OMA and NOMA modes to minimize the long-term average weighted sum of AoI of the network? To the best of authors' knowledge, the answer to this question remains unknown in the literature. The NOMA scheme allows the BS to serve more clients in each time slot at the cost of a high transmission error probability, while the OMA scheme serves at most one client in each time slot with a smaller transmission error probability. This makes the optimal multiuser scheduling problem with adaptive NOMA/OMA non-trivial. In Fig.1 we depict an example of the AoI evolution under the adopted adaptive NOMA/OMA scheduling for a two-client network. We can observe from Fig. 1 that the BS may take a risk to serve both clients in order to achieve small AoI for both clients at next time slot when the age difference between clients is relatively small. When the age difference between clients is large with one age being small, the BS tends to use OMA to serve the client with larger AoI.

Motivated by the gap above, in this paper we consider a wireless network with a BS that conducts timely status updates to multiple clients in a time-slotted manner. The BS is able to adaptively switch between NOMA and OMA for the downlink transmission. To achieve reduced AoI performance, the BS needs to decide which scheme (i.e., NOMA or OMA) to use at the beginning of each time slot. For the OMA scheme, the BS should further decide which client to serve. For the NOMA

scheme, the BS needs to further decide the power allocated to each scheduled client. That is, when using NOMA, the BS should decide which clients to serve by allocating non-zero power for status update transmission to these clients; the rest unselected clients will be allocated with zero power.

### A. Contributions

The main contributions of this paper lie in the following two aspects:

- For the two-client scenario, we develop the optimal policy for the BS to decide whether to use NOMA or OMA for each downlink transmission based on the instantaneous AoI of both clients by formulating a Markov Decision Process (MDP) problem. We prove the existence of the optimal stationary and deterministic policy, and perform action elimination to reduce the action space for lower computation complexity. The optimal policy is shown to have a switching-type property with obvious decision switching boundaries. A suboptimal policy with lower computation complexity is also proposed, which can achieve near-optimal performance, as shown by the simulation results.
- For the multi-client scenario, the optimal policy is not computationally tractable due to the exponentially increasing state space for linearly increasing number of clients, the coupled AoI evolution across clients and large action space considering different combinations of power allocated to each client. To adaptively switch between NOMA and OMA, we formulate a nonlinear optimization problem to determine the optimal power allocated to each client by maximizing the weighted sum of expected AoI drop of the network within each time slot, inspired by the suboptimal policy for the two client scenario and the max-weight policy in [12]–[14]. We manage to resolve the formulated problem by approximating it as a convex optimization problem. Simulation results show the tightness of the adopted approximation. The performance of the adaptive NOMA/OMA scheme by solving the convex optimization problem is shown to be close to that of max-weight policy solved by exhaustive search. Besides, the adaptive NOMA/OMA scheme can achieve significantly lower average AoI, compared to the OMA scheme, especially when the number of clients in the network is large and the transmission SNR is high.

### B. Related Work

We note that MDP method has been widely used in designing optimal scheduling policies for average AoI minimization [3]–[6], [19]–[21]. In multiuser systems, the states of the system are jointly determined by the AoI values of all users, where the MDP method becomes intractable as the number of users increases [21]. This is because the increasing number of users will lead to exponentially exploding state space and enormous computation complexity, known as the curse of dimensionality [29]. Thus, several attempts [12]–[14], [16], [17], [19], [20] have been made to seek low-complexity

scheduling algorithms. An online learning algorithm was developed to obtain a low-complexity suboptimal policy in [20]. Whittle index policy has been investigated in [12], [13], [16], [19], where the indexability of their considered problem was proved. This policy demonstrated near-optimal performance in numerical simulations. To implement the Whittle index policy, the Whittle index function needs to be derived beforehand and the user with the largest Whittle index will be scheduled to update its status. However, it can be challenging to prove indexability and derive closed-form Whittle index function for many problems [30]. To address these issues, the authors in [31] proposed an Approximate Index Policy. On the other hand, the max-weight policy has been studied in [12]–[14] and the upper bound of its average age performance was analyzed. Simulation results in [12], [13] showed negligible performance gap between the max-weight policy and the optimal policy, and similar performance between Whittle index policy and max-weight policy.

All the aforementioned work focused on the OMA scheme, i.e., different users cannot update their status simultaneously. The potentials of the NOMA scheme on reducing AoI were first investigated in [22] considering a simple two-user network. The analytical expression of the total average AoI of the network using NOMA scheme and that of conventional OMA environments were derived via Stochastic Hybrid Systems (SHS) and compared in different setups. The simulation results have illustrated the advantage of NOMA for the case of relatively high spectral efficiency in comparison with OMA. The authors in [22] focused on analyzing the AoI of two-user network that always uses NOMA to investigate the potential of NOMA scheme by comparing it with the AoI of the same network adopting OMA scheme. In contrast, our work considers how to dynamically schedule the communications in a more general multiuser system by adaptively switching between OMA and NOMA modes to minimize the AoI of the network. The considered system is more practical due to the increased number of users and the scheduling scheme is more comprehensive including which user(s) to schedule and the corresponding power allocation.

## II. SYSTEM MODEL

We consider a multiuser wireless network, in which a BS conducts timely status updates to  $N$  clients in a slotted manner. At the beginning of each time slot, the BS can generate a status update packet for each client, which is known as *generate-at-will* in the literature [3], [4], [12]. Adaptive NOMA/OMA transmission scheme is adopted by the BS. Specifically, the BS can adaptively switch between NOMA and OMA for the downlink transmission.<sup>1</sup> With NOMA, it is possible for more than one client to receive their packets simultaneously within one time slot. At the end of each time slot, if client  $i$  has received its packet successfully from the BS, it will send an acknowledgment (ACK) to the BS. The ACK link from all clients to the BS is considered to be error-free and delay-free.

<sup>1</sup>TDMA-based OMA scheme is considered in this paper. That is, the BS schedules one user to serve in each time slot when using the OMA scheme.

We use *Age of Information* (AoI) [2] to characterize the timeliness of the information received at each client. AoI is defined as the time elapsed since the generation time of the latest received information at the destination side. Mathematically, the AoI of client  $i$  in time  $t$ , denoted by  $\Delta_i(t)$ , is  $t - u_i(t)$ , where  $u_i(t)$  denotes the generation time of the latest received status update at time  $t$ . According to the considered *generate-at-will* model, if client  $i$  has successfully received its status update from the BS, its AoI will decrease to 1, otherwise its AoI increases by 1. Mathematically, we have

$$\Delta_i(t+1) = \begin{cases} \Delta_i(t) + 1, & v_i(t) = 0, \\ 1, & v_i(t) = 1, \end{cases} \quad (1)$$

where  $v_i(t)$  is the indicator that is equal to 1 when the client  $i$  receives its status update correctly from the BS in time slot  $t$ , and  $v_i(t) = 0$  otherwise. The weighted sum of the expected AoI of all clients is adopted to measure the network-wide information timeliness, which is given by

$$\bar{\Delta} = \lim_{T \rightarrow \infty} \sup \frac{1}{T} \mathbb{E} \left[ \sum_{i=1}^N \sum_{t=1}^T w_i \Delta_i(t) \right], \quad (2)$$

where the expectation is taken over all possible system dynamics and  $w_i$  is the weight coefficient of client  $i$  with  $\sum_{i=1}^N w_i = 1$ . Specifically,  $w_i$  indicates the importance of client  $i$  which is predetermined according to the practical requirement of the real systems. The larger value of  $w_i$ , the greater importance of client  $i$ .

For ease of understanding, we first consider the two-client scenario, i.e.,  $N = 2$ . We later will extend our design to the general case with more clients. In the OMA mode, the BS only conducts transmission to a single client. In this context, if time slot  $t$  is assigned for the transmission to client  $i$ ,  $i \in \{1, 2\}$ , the signal received at the client  $i$  can be written as

$$y_i^O(t) = h_i(t) \sqrt{P} s_i(t) + n_i(t), \quad (3)$$

where  $P$  is the constant transmission power of the BS;  $s_i$  is the status update message from the BS to client  $i$ ;  $h_i$  is the channel coefficient between the BS and client  $i$ . Specifically,

$$h_i = \sqrt{d_i^{-\tau}} g_i, \quad (4)$$

where the normalized distance  $d_i = c_i/c_0$ , with  $c_i$  and  $c_0$  denoting the distance between client  $i$  to the BS and the baseline distance, respectively. Parameter  $\tau$  denotes the path loss exponent and  $g_i \sim \mathcal{CN}(0, 1)$  with  $\mathcal{CN}$  denoting complex normal distribution<sup>2</sup>. Without loss of generality, we consider  $c_1 < c_2$ , i.e.,  $\mathbb{E}[|h_1|^2] > \mathbb{E}[|h_2|^2]$ . Random variable  $n_i$  is the complex additive Gaussian noise with variance  $\sigma_i^2$ . For simplicity, we assume the variance of  $n_i$  is identical for both clients, i.e.,  $\sigma_i^2 = \sigma^2$ ,  $\forall i$ . After receiving the signal, the information can be decoded in an interference-free manner with a SNR  $\gamma_i = |h_i|^2 \rho$ , where  $\rho = P/\sigma^2$  is the transmission SNR. Then, the rate for client  $i$  can be expressed as

<sup>2</sup>In this paper, we consider a Rayleigh fading environment, and our framework can be readily extended to other channel models.

$R_i^{OMA} = \log(1 + \gamma_i)$ . The outage probability of client  $i$  using OMA is given by

$$P_i^O = 1 - P(R_i^{OMA} \geq R_i) = 1 - \exp\left(-\frac{(2^{R_i} - 1)d_i^\tau}{\rho}\right), \quad (5)$$

where  $R_i$  is the target rate of client  $i$ , according to the integrals of elementary functions in [32], which are also applied to calculate the outage probability for the far user as well as that of NOMA scheme. The packet for each client at the BS has the same length and the transmission to each client takes one time slot. Thus, the target data rate for each client is the same, i.e.,  $R_1 = R_2 = R$ .

On the other hand, when NOMA is conducted in time slot  $t$ , the signals to different clients are combined in the power domain at the BS by allocating different power levels to them. Through successive interference cancellation (SIC), it is possible for two clients to successfully recover their corresponding information in the same time slot. We consider fixed power transmission, and the observation at client  $i$  can be expressed as

$$y_i^N(t) = h_i(t)(\sqrt{\alpha_1 P} s_1(t) + \sqrt{\alpha_2 P} s_2(t)) + n_i(t), \quad (6)$$

where  $\alpha_i$  is the power allocation coefficient, and we readily have  $\alpha_1 + \alpha_2 = 1$  to achieve the best possible performance. It is assumed that the BS only has the knowledge of statistical channel state information (CSI) of its channels to both clients<sup>3</sup>, while the clients as receivers have perfect knowledge of CSI, as in [26], [33]. Thus, we have  $\alpha_1 < \alpha_2$  according to the NOMA principle. Note that OMA can be regarded as a special case of NOMA, which allocate all power to one client.

Then, for client 2 (i.e., the far user), it decodes its message from the BS directly by treating  $s_1$  as interference. The received SINR can be written as  $\gamma_{22} = \alpha_2 |h_2|^2 / (\alpha_1 |h_2|^2 + 1/\rho)$ . Therefore, the outage probability of client 2 using NOMA is given by

$$\begin{aligned} P_2^N &= 1 - P(\log(1 + \gamma_{22}) \geq R) \\ &= 1 - \exp\left(-\frac{(2^R - 1)d_2^\tau}{\rho(\alpha_2 - \alpha_1(2^R - 1))}\right), \end{aligned} \quad (7)$$

where we enforce  $\alpha_2 - \alpha_1(2^R - 1) > 0$ , i.e.,  $\alpha_2 > \frac{2^R - 1}{2^R}$ .

For client 1 (i.e., the near user), it will conduct SIC. Specifically, client 1 will first decode  $s_2$  as what client 2 has done by treating  $s_1$  as interference. The received SINR of client 1 when decoding  $s_2$ , denoted by  $\gamma_{12}$ , can thus be similarly expressed as  $\gamma_{12} = \alpha_2 |h_1|^2 / (\alpha_1 |h_1|^2 + 1/\rho)$ . Once  $s_2$  is successfully decoded, client 1 will then decode  $s_1$  without interference, and the resultant SNR is  $\gamma_{11} = \alpha_1 |h_1|^2 \rho$ .

The outage probability of client 1 using NOMA can thus be calculated as

$$\begin{aligned} P_1^N &= 1 - P(\log(1 + \gamma_{12}) \geq R \ \& \ \log(1 + \gamma_{11}) \geq R) \\ &= 1 - \exp\left(-\max\left\{\frac{(2^R - 1)d_1^\tau}{\rho(\alpha_2 - \alpha_1(2^R - 1))}, \frac{(2^R - 1)d_1^\tau}{\rho\alpha_1}\right\}\right). \end{aligned} \quad (8)$$

Comparing the above outage probability expressions between NOMA and OMA schemes, we can find that NOMA offers more chances for the BS to transmit fresh status updates to both clients at the cost of a higher outage probability. Thus, to maintain the freshness of the information received at each client, at the beginning of each time slot, the BS needs to carefully decide whether to use NOMA or OMA scheme. In addition, the outage probability of NOMA is determined by the power allocation among the two clients. As such, when using NOMA, the BS should appropriately allocate power for the transmission to each client. The power allocated to each client is considered to be discrete in the two-client system. Specifically, the power allocated to client  $i$ , denoted by  $p_i$ , can only take the value from the discrete set  $\{0, p, 2p, 3p, \dots, Lp\}$  with  $p = P/L$  and  $p_1 + p_2 = P$ , as  $\alpha_1 = 1 - \alpha_2$ . That is,  $\alpha_i$  can take the value from  $\{0, \frac{1}{L}, \frac{2}{L}, \frac{3}{L}, \dots, 1\}$ . As client 2 is far from the BS (i.e.,  $c_1 < c_2$ ), to effectively use NOMA,  $\alpha_2$  should be larger than  $\alpha_1$  when applying NOMA, i.e.,  $\alpha_2 > 0.5$ . Combining it with the previous condition  $\alpha_2 > \frac{2^R - 1}{2^R}$ , one can deduce that  $\alpha_2$  can only take value from  $\{0, \max\{\frac{1}{2} + \frac{1}{L}, \lceil \frac{(2^R - 1)L}{2^R} \rceil \frac{1}{L}\}, \max\{\frac{1}{2} + \frac{1}{L}, \lceil \frac{(2^R - 1)L}{2^R} \rceil \frac{1}{L}\} + \frac{1}{L}, \dots, 1\}$ .

Let  $\alpha_2(t)$  denote the power allocation coefficient for client 2 in time slot  $t$ . Specifically,  $\alpha_2(t) = 0$  or  $\alpha_2(t) = 1$  indicates the BS uses OMA scheme, conducting orthogonal transmission to client 1 and client 2, respectively; otherwise, the BS uses NOMA scheme, serving both clients with the amount of power  $\alpha_2(t)P$  allocated to client 2 and  $(1 - \alpha_2(t))P$  to client 1.

Action  $a \in \{0, \max\{\lceil \frac{L}{2} \rceil + 1, \lceil \frac{(2^R - 1)L}{2^R} \rceil\}, \dots, L\}$  indicates that the BS allocates  $a_t p$  amount of power to client 2. If  $a = 0$ , the BS chooses OMA scheme and only transmits information to client 1; if  $a = L$ , the BS chooses OMA scheme and transmits information to client 2; otherwise, the BS chooses NOMA scheme, with  $ap$  amount of power allocated to client 2 and  $P - ap$  allocated to client 1. Given the AoI of both clients at the beginning of a time slot, the action to take will influence the corresponding AoI at the beginning of the next time slot (i.e., the AoI drop for one or two clients). In this way, the scheduling policy will affect the AoI at each time slot sequentially and thus, affect the weighted sum of the expected AoI given in (2). Our design objective is to find the optimal policy to be adopted by the BS that can adaptively switch between NOMA and OMA schemes to minimize the weighted sum of the expected AoI for both clients.

### III. OPTIMAL AND SUBOPTIMAL POLICIES FOR TWO-CLIENT SYSTEM

The scheduling policy design is a dynamic decision-making problem. In this section, we formulate it as an MDP problem

<sup>3</sup>The network overhead in the considered system would be low as the decision is made based on the channel statistic information rather than the instantaneous CSI. Thus, the overhead network cost is insignificant and not considered in this work.

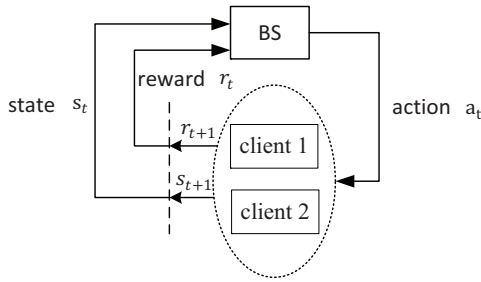


Figure 2: A graphical explanation of MDP formulation.

and investigate the age-optimal policy that minimizes the weighted sum of the expected AoI of both clients. By analyzing the structural results of the optimal policy, we then devise a suboptimal policy with lower computation complexity.

#### A. MDP Formulation

The MDP problem is described by a tuple  $\{\mathcal{S}, \mathcal{A}, \mathbf{P}, r\}$  [34], where

- State space  $\mathcal{S} = \mathbb{Z}^+ \times \mathbb{Z}^+$ : The state in time slot  $t$  is composed by the instantaneous AoI of both clients,  $s_t \triangleq (\Delta_{1,t}, \Delta_{2,t})$ .
- Action space  $\mathcal{A} = \{0, \max\{\lceil \frac{L}{2} \rceil + 1, \lceil \frac{(2^R-1)L}{2^R} \rceil\}, \dots, L\}$ : the detailed description of action  $a_t \in \mathcal{A}$  has been provided at the end of the previous section.
- Transition probabilities  $\mathbf{P}$ :  $P(s_{t+1}|s_t, a_t)$  is the probability of the transition from state  $s_t$  to  $s_{t+1}$  when taking action  $a_t$ . According to the outage probability of both clients using either NOMA or OMA given in Section II, we have the following transition probabilities,

$$P((1, \Delta_2 + 1)|(\Delta_1, \Delta_2), a = 0) = 1 - P_1^O, \quad (9a)$$

$$P((\Delta_1 + 1, \Delta_2 + 1)|(\Delta_1, \Delta_2), a = 0) = P_1^O, \quad (9b)$$

$$P((\Delta_1 + 1, 1)|(\Delta_1, \Delta_2), a = L) = 1 - P_2^O, \quad (9c)$$

$$P((\Delta_1 + 1, \Delta_2 + 1)|(\Delta_1, \Delta_2), a = L) = P_2^O, \quad (9d)$$

and for  $i \neq 0, L$

$$\begin{aligned} P((1, \Delta_2 + 1)|(\Delta_1, \Delta_2), a = i) &= (1 - P_1^N(a))P_2^N(a), \\ P((\Delta_1 + 1, 1)|(\Delta_1, \Delta_2), a = i) &= (1 - P_2^N(a))P_1^N(a), \\ P((1, 1)|(\Delta_1, \Delta_2), a = i) &= (1 - P_1^N(a))(1 - P_2^N(a)), \\ P((\Delta_1 + 1, \Delta_2 + 1)|(\Delta_1, \Delta_2), a = i) &= P_1^N(a)P_2^N(a), \end{aligned} \quad (10)$$

where  $P_1^N(a)$  and  $P_2^N(a)$  are the outage probability of client 1 and client 2, respectively, using NOMA with  $\alpha_1 = 1 - \frac{a}{L}$  and  $\alpha_2 = \frac{a}{L}$ . Note that in (9) and (10), the time superscript for the state  $(\Delta_{1,t}, \Delta_{2,t})$  and action  $a_t$  is omitted for brevity.

- $r : \mathcal{S} \times \mathcal{A} \rightarrow \mathbb{R}$  is the one-stage reward function of state-action pairs, defined as  $r(s_t, a_t) = w_1 \Delta_{1,t} + w_2 \Delta_{2,t}$ .

Fig. 2 shows the interaction between the BS and the clients in MDP formulation. Let  $\pi$  denote a transmission policy at the BS, which maps system states to action space. A policy consists of a sequence of decision rules  $\pi = (\pi_1, \pi_2, \dots)$ . It

is stationary if  $\pi_t$  is a function of state  $s_t$  rather than the whole history and does not depend on time, i.e.,  $\pi_t = \pi(a|s_t)$ , indicating choosing action  $a$  with probability  $\pi(a|s_t)$  when the state at time  $t$  is  $s_t$ . Given any initial state  $s_0$ , the infinite-horizon average reward of any feasible policy  $\pi$ , can be expressed as

$$C(\pi, s_0) = \lim_{T \rightarrow \infty} \sup \frac{1}{T} \sum_{k=0}^T \mathbb{E}_{s_0}^\pi [r(s_k, a_k) | s_0]. \quad (11)$$

We are now ready to formulate the following MDP problem

$$\textbf{Problem 1:} \quad \min_{\pi} C(\pi, s_0). \quad (12)$$

To proceed, we first investigate the existence of an optimal stationary and deterministic policy of Problem 1 and arrive at the following theorem.

**Theorem 1.** *There exists a constant  $J^*$ , a bounded function  $h(\Delta_1, \Delta_2) : \mathcal{S} \rightarrow \mathbb{R}$  and a stationary and deterministic policy  $\pi^*$ , satisfying the average reward optimality equation,*

$$J^* + h(\Delta_1, \Delta_2) = \min_{a \in \mathcal{A}} (w_1 \Delta_1 + w_2 \Delta_2 + \mathbb{E}[h(\hat{\Delta}_1, \hat{\Delta}_2)]), \quad (13)$$

$\forall (\Delta_1, \Delta_2) \in \mathcal{S}$ , where  $\pi^*$  is the optimal policy,  $J^*$  is the optimal average reward, and  $(\hat{\Delta}_1, \hat{\Delta}_2)$  is the next state after  $(\Delta_1, \Delta_2)$  taking action  $a$ .

*Proof.* See Appendix A in [35].  $\square$

According to Theorem 1, the optimal policy is stationary and deterministic, i.e., it is time-invariant and deterministically selects an action in each time slot with no randomization.

#### B. Action Elimination

In this subsection, we establish action elimination by analyzing the property of the formulated MDP problem, which can reduce the action space of each state for lower computation complexity. According to (7) and (8), and the fact  $\alpha_1 + \alpha_2 = 1$ , the outage probability of client 2 using NOMA (i.e.,  $P_2^N$ ) is decreasing in  $\alpha_2$ , i.e.,  $P_2^N(a)$  is decreasing in action  $a$  when  $\max\{\lceil \frac{L}{2} \rceil + 1, \lceil \frac{(2^R-1)L}{2^R} \rceil\} < a < L$ . However, the outage probability of client 1 using NOMA (i.e.,  $P_1^N$ ) is decreasing in  $\alpha_2$  when  $\frac{2^R-1}{2^R} < \alpha_2 < \frac{2^R}{2^R+1}$  and is increasing in  $\alpha_2$  when  $\frac{2^R}{2^R+1} < \alpha_2 < 1$ . That is,  $P_1^N(a)$  is decreasing in  $a$  when  $a \in \{\max\{\lceil \frac{L}{2} \rceil + 1, \lceil \frac{(2^R-1)L}{2^R} \rceil\}, \dots, \lfloor \frac{2^R L}{2^R+1} \rfloor\}$  and increasing in  $a$  when  $a \in \{\lfloor \frac{2^R L}{2^R+1} \rfloor, \lceil \frac{2^R L}{2^R+1} \rceil + 1, \dots, L-1\}$ . As such, the action  $a = \lfloor \frac{2^R L}{2^R+1} \rfloor$  has a better performance in reducing AoI of both clients, with lower outage probability compared to  $a \in \{\max\{\lceil \frac{L}{2} \rceil + 1, \lceil \frac{(2^R-1)L}{2^R} \rceil\}, \max\{\lceil \frac{L}{2} \rceil + 1, \lceil \frac{(2^R-1)L}{2^R} \rceil\} + 1, \dots, \lfloor \frac{2^R L}{2^R+1} \rfloor\}$ . Thus, the action space can be reduced to  $a \in \{0, \lfloor \frac{2^R L}{2^R+1} \rfloor, \lfloor \frac{2^R L}{2^R+1} \rfloor + 1, \dots, L\}$ .

#### C. Structural Results on Optimal Policy

In this subsection, we derive two structural results of the optimal policy that offer an effective way to reduce the offline computation complexity and online implementation hardware requirement.



**Theorem 2.** *The optimal policy  $\pi^*$  has a switching-type policy. That is, denoting  $c$  and  $d$  as any action from action space  $\{0, \lfloor \frac{2^R L}{2^{R+1}} \rfloor, \lfloor \frac{2^R L}{2^{R+1}} \rfloor + 1, \dots, L\}$ ,*

- *If  $\pi^*((\Delta_1, \Delta_2)) = c$ , then  $\pi^*((\Delta_1, \Delta_2 + z)) = d$ , where  $z$  is any positive integer and  $d \geq c$ ,*
- *If  $\pi^*((\Delta_1, \Delta_2)) = c$ , then  $\pi^*((\Delta_1 + z, \Delta_2)) = d$ , where  $z$  is any positive integer and  $d \leq c$ .*

*Proof.* See Appendix B in [35].  $\square$

Given the structure of the optimal policy, only the decision switching boundary is needed for implementation, rather than storing each state-action pair in the optimal policy, which significantly reduces the memory for the hardware. In addition, based on the structure, a structured value iteration algorithm can be developed accordingly as in [5, Algorithm 1] to reduce the complexity when calculating the optimal policy.

#### D. Suboptimal Policy

In this subsection, we propose a suboptimal policy with lower computation complexity compared with that of the optimal MDP policy. Inspired by the max-weight policy in [13], the proposed suboptimal policy makes use of the transition probability of the underlying MDP and only maximizes the weighted sum of the expected AoI drop within each time slot, i.e., the weighted sum of the expected difference between the age of current state and the possible age of next state. According to (9), given the current state  $s = (\Delta_1, \Delta_2)$ , the expected AoI drop, denoted by  $\mathbb{E}[\eta(s, a)]$ , can be expressed as

$$\mathbb{E}[\eta(s, a)] = \begin{cases} w_1(1 - P_1^O)\Delta_1 - 1, & \text{if } a = 0; \\ w_2(1 - P_2^O)\Delta_2 - 1, & \text{if } a = L \\ w_1(1 - P_1^N(a))\Delta_1 + w_2(1 - P_2^N(a))\Delta_2 - 1, & \text{otherwise.} \end{cases} \quad (14)$$

where  $a = 0$  indicates using the OMA scheme to serve client 1, the next possible states thus include  $(1, \Delta_2 + 1)$  and  $(\Delta_1 + 1, \Delta_2 + 1)$  with probability in (9a) and (9b) respectively.  $a = L$  indicates using the OMA scheme to serve client 2, the next possible states thus include  $(\Delta_1 + 1, 1)$  and  $(\Delta_1 + 1, \Delta_2 + 1)$  with probability in (9c) and (9d) respectively. The remaining cases indicate using the NOMA scheme to serve both clients, the next possible states thus include  $(1, \Delta_2 + 1)$ ,  $(\Delta_1 + 1, \Delta_2 + 1)$ ,  $(\Delta_1 + 1, 1)$  and  $(1, 1)$ . The corresponding probability depends on the power allocation, and (10) provides how power allocation influences the state transition probability. Then, the action of state  $s$  in the proposed suboptimal policy  $\bar{\pi}$  can be given by

$$\bar{\pi}(s) = \arg \max_a \mathbb{E}[\eta(s, a)]. \quad (15)$$

The suboptimal policy is simple and easy to implement. Compared with the RVI method applied to calculate the optimal policy, the suboptimal policy does not require iterations. Moreover, as we show via the numerical results in Section V, the suboptimal policy can achieve near-optimal performance. In addition, the suboptimal policy can be readily extended to a continuous power scenario, i.e., in each time slot, finding the optimal power allocated to each client to maximize the weighted sum of the expected AoI drop where  $P_1^N(a)$  and  $P_2^N(a)$  in (14) are replaced by the outage probability of each

client using NOMA with continuous power allocated to client 2.

#### IV. EXTENSION TO MULTIPLE CLIENTS $N > 2$

Recall that the BS aims to deliver status updates to all clients in a timely manner. To that end, the BS needs to carefully decide the transmission power allocated to each client as explained in Section III. However, both state space and action space grow exponentially as the number of clients increases, represented by  $\mathbb{Z}_+^N$ , and  $L^N$ , respectively, where  $\mathbb{Z}_+$  denotes the set of positive integers. The increase of power discretization level  $L$  will also lead to a larger action space. Thus, the MDP method elaborated in Section III is no longer computationally tractable for the multi-client scenarios.

In this section, we extend our suboptimal policy proposed in Section III.D to the general case with a BS delivering timely status updates to  $N$  clients ( $N > 2$ )<sup>4</sup> in a slotted manner using adaptive NOMA/OMA principle<sup>5</sup>. At the beginning of each time slot, the BS needs to schedule transmission to clients. That is, the BS decides to transmit to which client(s) and allocates the transmission power to them. At the end of each time slot, if client  $i$  has received its packet successfully from the BS, it will send an ACK to the BS. The observation at the  $i$ th client in time slot  $t$  is given by

$$y_i(t) = h_i(t) \sum_{j=1}^N \sqrt{p_j(t)} s_j(t) + n_i(t), \quad (16)$$

where  $s_j$  denotes the message from BS to client  $j$  and  $h_i$  denotes the channel coefficient between the BS and client  $i$  as in (4). Without loss of generality, we consider the sorted distance  $c_1 > c_2 > \dots > c_N$ , i.e.,  $\mathbb{E}[|h_1|^2] < \mathbb{E}[|h_2|^2] < \dots < \mathbb{E}[|h_N|^2]$ . Variable  $p_j$  is the transmission power allocated to the message intended to client  $j$  which satisfies the power limit  $\bar{p}$ , i.e.,  $\sum_{i=1}^N p_i \leq \bar{p}$ , and  $n_i \sim \mathcal{CN}(0, \sigma_i^2)$  is the complex additive Gaussian noise at client  $i$ . For simplicity, we assume the variance of  $n_i$  is identical for all clients, i.e.,  $\sigma_i^2 = \sigma^2, \forall i$ .

Denoted by  $\mathcal{N}$  the set of all clients in the system, i.e.,  $\mathcal{N} = \{1, 2, \dots, N\}$ . Any subset  $\mathcal{K} \subseteq \mathcal{N}$  denotes the possible set of clients to be served in each time slot. According to the NOMA principle, in the subset of clients selected to be served, a client with a smaller distance is assigned with a larger decoding order index [36], [37]. Each selected client employs the successive interference cancellation (SIC) technique to decode the messages for clients with a smaller decoding order index in the selected client set first, and to remove the inter-user interference if the decoding is correct. Denote  $\lambda_i$  as the indicator that equals 1 when client  $i$  is selected to transmit, and equals 0 otherwise. Thus, if  $K$  clients are selected to be served, then  $\sum_{i=1}^N \lambda_i = K$ . Let  $m(k)$  denote the original

<sup>4</sup>In the real system, the value of  $N$  will not be large considering the maximum allowable SIC stage due to some practical issues like the computational capacity of the hardware. The considered model can capture the system with multiple orthogonal frequency channels, where each frequency channel is shared by  $N$  clients.

<sup>5</sup>The scheduling design for a multi-antenna BS transmitting multiple streams simultaneously has been left as a future work.

client index among the  $K$  selected clients whose decoding order is  $k$ , i.e.,  $\lambda_{m(k)} = 1$ ,  $k \in \{1, 2, \dots, K\}$ ,  $\forall k$ .  $m(\cdot)$  is a single mapping that maps the set  $\{1, 2, \dots, K\}$  to the set  $\{1, 2, \dots, N\}$  where  $K \leq N$ . The sequence  $\{m(k)\}_{k=1,2,\dots,K}$  consists of the set of clients selected for receiving status updates. Besides, according to the decoding order of NOMA, we have  $m(1) < m(2) < \dots < m(K)$ .

Given the set of clients  $\{m(k)\}_{k=1,2,\dots,K}$  to be served, denote by  $R_{m(i)}^{m(j)}$  the rate for client  $m(j)$  to detect client  $m(i)$ 's message. We consider  $j \geq i$ , indicating  $m(j) \geq m(i)$ . To correctly detect client  $m(i)$ 's message, client  $m(j)$  should first successfully remove the interference from clients in  $\{m(k)\}_{k=1,2,\dots,K}$  whose decoding order index is smaller than  $m(i)$ . Thus, the expression of  $R_{m(i)}^{m(j)}$  is given by [33], [36], [37]

$$R_{m(i)}^{m(j)} = \log \left( 1 + \frac{|h_{m(j)}|^2 p_{m(j)}}{\sum_{k=i+1}^K |h_{m(k)}|^2 p_{m(k)} + \sigma^2} \right). \quad (17)$$

As the BS does not have perfect knowledge of CSI, outages may occur in the considered system. We define that if client  $m(j)$  cannot detect its own message or the message of client  $m(i)$  with smaller decoding index  $m(j) \geq m(i)$  in the selected client set, then an outage occurs at client  $m(j)$  [33], [38]. Similar to the two-client scenario that the BS transmits one message to each client with the same fixed target rate  $R$ , the outage probability of client  $m(j)$  can be expressed as [36], [37]

$$P_{m(j)}^o = 1 - P \left( R_{m(1)}^{m(j)} \geq R, \dots, R_{m(i)}^{m(j)} \geq R \right) \\ = 1 - \exp \left( -d_{m(j)}^T \max_{k=1,2,\dots,j} \left\{ \frac{(2^R - 1)\sigma^2}{p_{m(k)} - (2^R - 1) \sum_{i=k+1}^K p_{m(i)}} \right\} \right). \quad (18)$$

We can see from (18) that if  $p_{m(k)} - (2^R - 1) \sum_{i=k+1}^K p_{m(i)} \leq 0$ , the outage probability of client  $m(j)$  will always be 1. Thus, for any client  $m(k)$  selected to be served, i.e.,  $p_{m(k)} \neq 0$ , the following condition needs to be satisfied

$$p_{m(k)} > (2^R - 1) \sum_{i=k+1}^K p_{m(i)}. \quad (19)$$

Otherwise, an outage always occurs and the allocated power will be wasted. Moreover, if client  $i$  is not served, i.e.,  $i \notin \{m(k)\}_{k=1,2,\dots,K}$  and  $p_i = 0$ , its outage probability is 1, otherwise, its outage probability will be smaller than 1. Mathematically, we have

$$\mathbb{E}[v_i(t) = 1] = \begin{cases} 0, & i \notin \{m(k)\}_{k=1,2,\dots,K}, \\ 1 - P_i^o, & i \in \{m(k)\}_{k=1,2,\dots,K}. \end{cases} \quad (20)$$

Recall the  $v_i(t)$  is the indicator that equals 1 when client  $i$  successfully receives its status update from the BS in time slot  $t$ . Let  $\mathbf{p}(t) = \{p_1(t), p_2(t), \dots, p_N(t)\}$  denote the amount of transmission power allocated to each client satisfying  $\sum_{i=1}^N p_i(t) \leq \bar{p}$ . Give  $\{m(k)\}_{k=1,2,\dots,K}$ , we have  $\sum_{i=1}^K p_{m(i)}(t) \leq \bar{p}$  and  $p_i(t) = 0$ ,  $\forall i \notin \{m(k)\}_{k=1,2,\dots,K}$ .

Note that the special case  $K = 1$  indicates only one client will be served, i.e., client  $m(1)$  will be served using OMA

scheme. The corresponding outage probability becomes  $1 - \exp \left( -d_{m(1)}^T \frac{(2^R - 1)\sigma^2}{p_{m(1)}} \right)$  as in (5).

We now extend our suboptimal policy (i.e., the problem in (15)) to the multiple-client scenario by formulating the following power allocation problem.

$$\textbf{Problem 2:} \quad \max_{\mathbf{p}(t)} \sum_{i=1}^N (1 - P_i^o(\mathbf{p}(t))) w_i \Delta_i(t) \\ \text{s.t., (19), } \sum_{i=1}^N p_i(t) \leq \bar{p}, p_i(t) \geq 0. \quad (21)$$

We note that in the above optimization problem, the instantaneous AoI of all clients in time slot  $t$  will affect the power allocated to each client. Clients with smaller AoI are less likely to be served as the resultant AoI drop is insignificant.

#### A. Effective power allocation

In this subsection, we solve Problem 2 to obtain the effective power allocation to minimize the weighted sum of expected AoI in two steps: 1) Step 1: design an optimal power allocation scheme to serve a fixed number of clients. That is, given  $K$ , find optimal  $\{m(k)\}_{k=1,2,\dots,K}$  and  $(p_{m(1)}, p_{m(2)}, \dots, p_{m(K)})$ ; 2) Step 2: choose optimal  $K \in \{1, 2, \dots, N\}$  that achieves the maximum objective value. The detailed description of these two steps is given in the following.

**1) Step 1: Optimal power allocation to conduct transmission to fixed  $K$  number of clients:** Given  $K$ , i.e., the number of clients to serve, the BS should decide which group of clients to serve, i.e.,  $\{m(k)\}_{k=1,2,\dots,K}$ , and the power allocated to them, i.e.,  $(p_{m(1)}, p_{m(2)}, \dots, p_{m(K)})$ . Recall that the power allocated to the unselected clients is 0.

As in [36, Eq.(15)], we convert the power constraint described in (19) to the following format to facilitate the use of power constraint,

$$\sum_{k=1}^K \hat{p}_{m(k)} (r + 1)^{(k-1)} \leq \bar{p}, \quad (22)$$

where  $r = 2^R - 1$  and

$$\hat{p}_{m(k)} = p_{m(k)} - r \sum_{i=k+1}^K p_{m(i)}. \quad (23)$$

The outage probability of the selected client  $m(k)$  can be expressed as

$$P_{m(k)}^o = 1 - P \left( R_{m(1)}^{m(k)} \geq R, \dots, R_{m(k)}^{m(k)} \geq R \right) \\ = 1 - \exp \left( -d_{m(k)}^T r \sigma^2 \max_{t=1,2,\dots,k} \left\{ \frac{1}{\hat{p}_{m(t)}} \right\} \right), k \in \{1, 2, \dots, K\}. \quad (24)$$

For other unselected nodes, their outage probability is always equal to 1. Recall that  $c_1 > c_2 > \dots > c_N$ , indicating  $d_1^T > d_2^T > \dots > d_N^T$ . We thus have  $d_{m(1)}^T > d_{m(2)}^T > \dots > d_{m(K)}^T$ . Note that only the selected clients may have AoI drop and the AoI of unselected clients will increase by one, and therefore the one-step weighted sum of expected AoI drop of



the network is actually that of those selected clients. Hence, for a given  $K$ , Problem 2 can be re-written as

$$\begin{aligned} \textbf{Problem 3: } & \max_{\mathbf{p}(t)} \sum_{k=1}^K \left(1 - P_{m(k)}^o(\mathbf{p}(t))\right) w_{m(k)} \Delta_{m(k)}(t) \\ \text{s.t., (19), } & \sum_{k=1}^K p_{m(k)}(t) \leq \bar{p}, \\ & p_i(t) = 0, \quad \forall i \notin \{m(k)\}_{k=1,2,\dots,K}. \end{aligned} \quad (25)$$

To further simplify the above problem, the variable transformation according to (22) is applied, and Problem 3 can be transformed into the following equivalent form:

$$\begin{aligned} \textbf{Problem 4: } & \max_{\hat{\mathbf{p}}(t), \{m(k)\}} \sum_{k=1}^K \left(1 - P_{m(k)}^o(\hat{\mathbf{p}}(t))\right) w_{m(k)} \Delta_{m(k)}(t) \\ \text{s.t., (22), } & \hat{\mathbf{p}}(t) = (\hat{p}_{m(1)}, \hat{p}_{m(2)}, \dots, \hat{p}_{m(K)}), \\ & \hat{p}_{m(k)} > 0, \quad \forall k \in \{1, 2, \dots, K\}. \end{aligned} \quad (26)$$

This problem consists of two parts: 1) select which  $K$  clients to serve, i.e.,  $\{m(k)\}$ ; 2) transferred power variable of these  $K$  clients, i.e.,  $\hat{\mathbf{p}}(t)$ , given  $\Delta(t) = \{\Delta_1(t), \Delta_2(t), \dots, \Delta_N(t)\}$ ,  $d_1^T > d_2^T > \dots > d_N^T$ ,  $r$  and  $\sigma^2$ .

Suppose  $\{m(k)\}_{k=1,2,\dots,K}$  is known, we then solve Problem 4 as following (note that the time index  $t$  is dropped hereafter for notation simplicity):

**Problem 5:**

$$\max_{\hat{\mathbf{p}}} \sum_{k=1}^K \exp\left(-d_{m(k)}^T r \sigma^2 \max\left\{\frac{1}{\hat{p}_{m(1)}}, \dots, \frac{1}{\hat{p}_{m(k)}}\right\}\right) w_{m(k)} \Delta_{m(k)} \quad (27a)$$

$$\text{s.t., } \sum_{k=1}^K (r+1)^{k-1} \hat{p}_{m(k)} \leq \bar{p}, \quad (27b)$$

$$\hat{p}_{m(k)} > 0, \quad k = 1, \dots, K. \quad (27c)$$

In solving Problem 5, we first have the following lemma.

**Lemma 1.** *Adding the following constraint:*

$$\hat{p}_{m(1)} \geq \hat{p}_{m(2)} \geq \dots \geq \hat{p}_{m(K)}$$

to Problem 5 will not change its optimal objective value of (27a)

*Proof.* See Appendix C in [35].  $\square$

By Lemma 1, we focus on solving the following problem to the same objective value as Problem 5, which can be solved in a simple and tractable way.

$$\textbf{Problem 6: } \max_{\hat{\mathbf{p}}} \sum_{k=1}^K w_{m(k)} \Delta_{m(k)} \exp\left(-\frac{d_{m(k)}^T r \sigma^2}{\hat{p}_{m(k)}}\right) \quad (28a)$$

$$\text{s.t. } \sum_{k=1}^K (r+1)^{k-1} \hat{p}_{m(k)} \leq \bar{p} \quad (28b)$$

$$\hat{p}_{m(1)} \geq \hat{p}_{m(2)} \geq \dots \geq \hat{p}_{m(K)} \quad (28c)$$

$$\hat{p}_{m(k)} > 0, \quad k = 1, \dots, K \quad (28d)$$

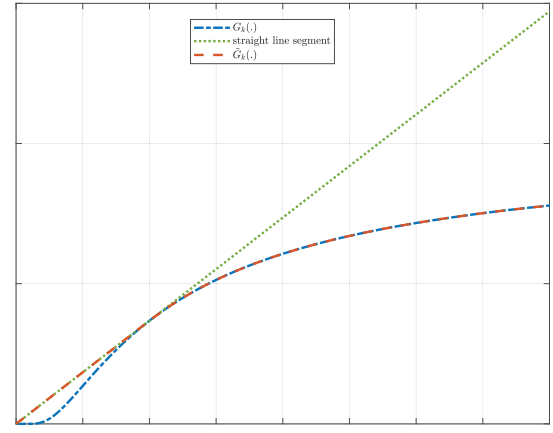


Figure 3: Understanding of the convex approximation.

To proceed, we first investigate the properties of the objective function (28a) in Problem 6. We define

$$G_k(\hat{p}_{m(k)}) := w_{m(k)} \Delta_{m(k)} \exp\left(-\frac{d_{m(k)}^T r \sigma^2}{\hat{p}_{m(k)}}\right).$$

The following properties hold for functions  $G_k(\cdot)$ ,  $k = 1, \dots, K$ :

- $\lim_{\hat{p}_{m(k)} \rightarrow 0^+} G_k(\hat{p}_{m(k)}) = 0$ . For convenience, we define  $G_k(0) = 0$ ;
- $\lim_{\hat{p}_{m(k)} \rightarrow +\infty} G_k(\hat{p}_{m(k)}) = w_{m(k)} \Delta_{m(k)}$ ;
- $G_k(\cdot)$  is strictly monotonically increasing on  $(0, +\infty)$ , which can be verified by checking  $G'_k(\cdot)$ ;
- $G_k(\cdot)$  is strictly convex on  $[0, \frac{d_{m(k)}^T r \sigma^2}{2})$ , and strictly concave on  $[\frac{d_{m(k)}^T r \sigma^2}{2}, +\infty)$ , which can be verified by checking  $G''_k(\cdot)$ .

Inspired by the properties above, we propose a convex upper approximation of  $G_k(\cdot)$  as follows. We find a constant  $\tilde{p}_{m(k)} > 0$  for each  $k = 1, \dots, K$ , and replace the segment of  $G_k(\cdot)$  on  $[0, \tilde{p}_{m(k)}]$  by the straight line segment connecting two points  $(0, G_k(0) = 0)$  and  $(\tilde{p}_{m(k)}, G_k(\tilde{p}_{m(k)}))$ . At the same time, the straight line segment is a tangent line to  $G_k(\cdot)$  at the point  $(\tilde{p}_{m(k)}, G_k(\tilde{p}_{m(k)}))$ . Therefore  $\tilde{p}_{m(k)}$  can be calculated as follows:

$$\frac{G_k(\tilde{p}_{m(k)}) - G_k(0)}{\tilde{p}_{m(k)} - 0} = G'_k(\tilde{p}_{m(k)})$$

which leads to the result  $\tilde{p}_{m(k)} = d_{m(k)}^T r \sigma^2$ . Hence a convex upper approximate of  $G_k(\cdot)$  is:

$$\tilde{G}_k(\hat{p}_{m(k)}) := \begin{cases} \frac{w_{m(k)} \Delta_{m(k)} e^{-1}}{d_{m(k)}^T r \sigma^2} \hat{p}_{m(k)}, & 0 \leq \hat{p}_{m(k)} < d_{m(k)}^T r \sigma^2 \\ w_{m(k)} \Delta_{m(k)} \exp\left(-\frac{d_{m(k)}^T r \sigma^2}{\hat{p}_{m(k)}}\right), & \hat{p}_{m(k)} \geq d_{m(k)}^T r \sigma^2 \end{cases}$$

For the sake of understanding, we illustrate an example of the adopted convex approximation in Fig. 3. Then we can solve

the following *convex* problem as an approximate of Problem 6:

$$\textbf{Problem 7: } \max_{\hat{\mathbf{p}}} \sum_{k=1}^K \tilde{G}_k(\hat{p}_{m(k)}) \quad (29a)$$

$$\text{s.t. } \sum_{k=1}^K (r+1)^{k-1} \hat{p}_{m(k)} \leq \bar{p}, \quad (29b)$$

$$\hat{p}_{m(1)} \geq \hat{p}_{m(2)} \geq \dots \geq \hat{p}_{m(K)}, \quad (29c)$$

$$\hat{p}_{m(k)} \geq 0, \quad k = 1, \dots, K. \quad (29d)$$

Let  $\hat{\mathbf{p}}^o = (\hat{p}_{m(1)}^o, \dots, \hat{p}_{m(K)}^o)$  be an optimal solution that we obtain by solving Problem 7, and denote the optimal objective value of Problem 7 as  $\tilde{U}^o = \tilde{U}(\hat{\mathbf{p}}^o) := \sum_{k=1}^K \tilde{G}_k(\hat{p}_{m(k)}^o)$ . Note that  $\hat{\mathbf{p}}^o$  is also a *feasible* solution to Problem 6. Moreover, denote the objective value of Problem 6 at  $\hat{\mathbf{p}}^o$  as  $U^o = U(\hat{\mathbf{p}}^o) = \sum_{k=1}^K G_k(\hat{p}_{m(k)}^o)$ . Then the optimal objective value of Problem 6, denoted by  $U^*$ , is bounded as  $U^o \leq U^* \leq \tilde{U}^o$ . The following Corollary provides an upper bound of the suboptimality gap  $U^* - U^o$  for Problem 6.

**Corollary 1.** *The gap between the optimal objective value of Problem 6 and that of Problem 7 is bounded by  $e^{-2} \sum_{k=1}^K w_{m(k)} \Delta_{m(k)}$ . Mathematically,  $U^* - U^o \leq e^{-2} \sum_{k=1}^K w_{m(k)} \Delta_{m(k)}$ .*

*Proof.* See Appendix D in [35].  $\square$

We realize that it could be difficult to derive the closed-form solution to both Problem 6 and Problem 7. However, compared to Problem 6, Problem 7 can be solved efficiently via any convex optimization solver. Besides, Corollary 1 offers the upper bound of the suboptimality gap between Problem 7 and Problem 6.

Moreover, for a fixed total number  $N$  of clients and a fixed number  $K$  of clients to be served, there are in total  $C_N^K$  possible sequences  $\{m(k)\}_{k=1,2,\dots,K}$ . By traversing all these combinations, we can find the optimal solution to Problem 7 with the optimal set of  $K$  clients to be served  $\mathcal{K} = \{m(k)\}_{k=1,2,\dots,K}$ . It is worth emphasizing that we traverse all these combinations by substituting them to (28a) rather than (29a), and then select the one with the maximum objective value<sup>6</sup>. We remark that the number of clients  $N$  will not be large due to the computational limitation of hardware. Thus the computation complexity is of our suboptimal scheme will remain at an acceptable level.

## 2) Step 2: Optimal number of clients to be served:

By comparing the optimal performance for every  $K \in \{1, 2, \dots, N\}$ , we can find the optimal value  $K^*$ , and its corresponding clients to be served  $\mathcal{K}^* = \{m(k)\}_{k=1,2,\dots,K^*}$  and  $(\hat{p}_{m(1)}, \hat{p}_{m(1)}, \hat{p}_{m(3)}, \dots, \hat{p}_{m(K^*)})$ . It is worth emphasizing that we traverse all  $K \in \{1, 2, \dots, N\}$  by substituting them to the object in Problem 2 to find  $\mathcal{K}^* = \{m(k)\}_{k=1,2,\dots,K^*}$  and the corresponding value  $(\hat{p}_{m(1)}, \hat{p}_{m(1)}, \hat{p}_{m(3)}, \dots, \hat{p}_{m(K^*)})$ .

<sup>6</sup>Note that the more clients scheduled to schedule at the same time, the higher the decoding complexity at the scheduled clients as more SIC stages are needed.

Then, according to the relationship between  $\{p_{m(k)}\}$  and  $\{\hat{p}_{m(k)}\}$ , we can transfer  $\{\hat{p}_{m(k)}\}$  to the power allocated to each client, and obtain  $\{p_{m(k)}\}$  and  $p_i = 0$ , if  $i \notin \mathcal{K}^*$ .

To summarize our method, the pseudocode of the overall algorithm for resolving Problem 2 is described in Algorithm 1.

---

### Algorithm 1 Calculate power allocated to each client

---

#### Require:

- 1: **Input:**  $\Delta(t) = \{\Delta_1(t), \Delta_2(t), \dots, \Delta_N(t)\}, (d_1, d_2, \dots, d_N), r, \tau$  and  $\sigma^2$ .
  - 2: **for**  $K = 1$  to  $N$  **do**
  - 3:    $\eta_K = 0$ ;
  - 4:   **for**  $j = 1$  to  $C_N^K$  **do**
  - 5:      $\{m(k)\}_{k=1,2,\dots,K} = \{m_j(k)\}_{k=1,2,\dots,K}$ ;  $\triangleright$  The subset of  $\mathcal{N}$  with  $K$  clients
  - 6:      $\{\hat{p}_{m(k)}\} :=$  solution to Problem 7;  $\triangleright$  Solve Problem 7 by convex optimization tool.
  - 7:     **if**  $\eta_K < \sum_{k=1}^K G_k(\hat{p}_{m(k)})$  **then**
  - 8:        $\eta_K = \sum_{k=1}^K G_k(\hat{p}_{m(k)})$ ;
  - 9:        $\{m_K^*(k)\}_{k=1,2,\dots,K} = \{m(k)\}_{k=1,2,\dots,K}$ ;
  - 10:        $\hat{\mathbf{p}}_K = \{\hat{p}_{m(k)}\}_{k=1,2,\dots,K}$ ;
  - 11:     **end if**
  - 12:   **end for**
  - 13: **end for**
  - 14:  $K^* = \arg \max_{K=1,2,\dots,N} \eta_K$ ;
  - 15:  $\mathcal{K}^* = \{m_K^*(k)\}_{k=1,2,\dots,K^*}$ ;  $\triangleright$  The set of served clients
  - 16: convert  $\hat{\mathbf{p}}_{K^*}$  to  $\mathbf{p}_{K^*}$  using (23);  $\triangleright$  Power allocated to clients in  $\mathcal{K}^*$ .
- 

## V. NUMERICAL RESULTS AND DISCUSSIONS

In this section, simulation results are provided to evaluate the effectiveness of the proposed adaptive NOMA/OMA scheme for both two-client and multi-client scenarios.

### A. Two-client scenario

This subsection provides numerical results to verify the analytical results for the two-client scenario presented in Section III. We set path loss exponent  $\tau = 2$  and the target data rate  $R = 1$  in all simulations. The SNR in this subsection refers to the transmission SNR  $\rho$ .

We follow [39] and apply Relative Value Iteration (RVI) method on truncated finite states ( $\Delta_i \leq 100, \forall i$ ) to approximate the countable infinite state space. The optimal policy and suboptimal policy is illustrated in Fig. 4, where SNR = 18dB, the normalized distances for two clients are  $d_1 = 2$  and  $d_2 = 4$ , and the weighted parameters for two clients  $w_1 = w_2 = 0.5$ . We can observe the switching structure of the optimal policy which verifies Theorem 2. Besides, we can find that the proposed suboptimal policy is similar to the optimal policy.

Fig. 5 compares the weighted sum of the expected AoI of the two clients under optimal policy using adaptive NOMA/OMA scheme (optimal adaptive NOMA/OMA

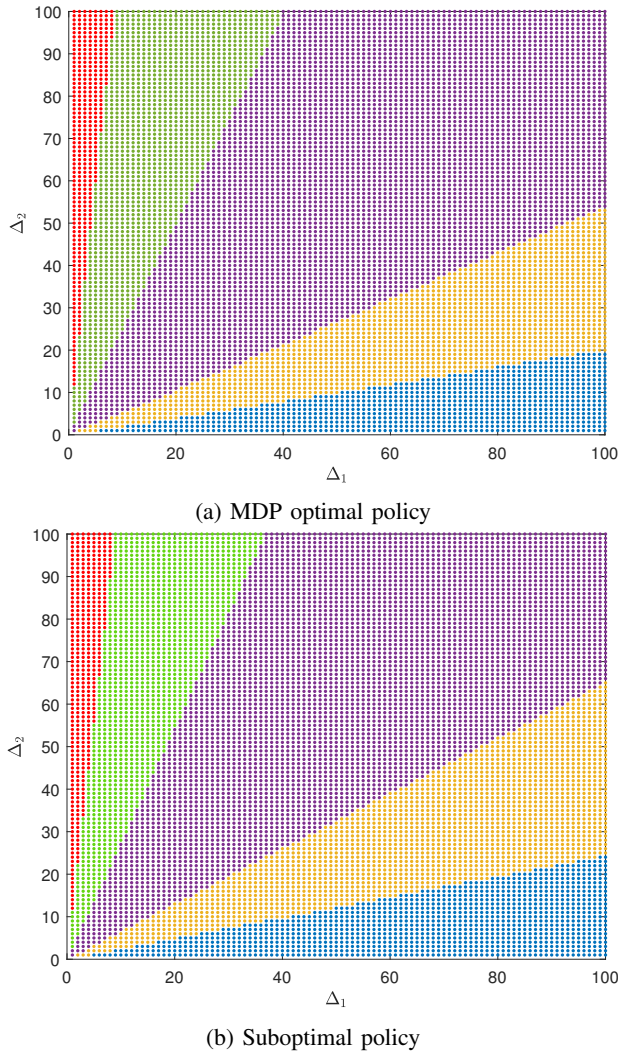


Figure 4: Age-optimal policy and suboptimal policy. Each point represents a state  $s = (\Delta_1, \Delta_2)$ . The colored area indicates action for each state, i.e.,  $a = 0$  for states in the blue area;  $a = 7$  for states in the orange area;  $a = 8$  for states in the purple area;  $a = 9$  for states in the green area and  $a = 10$  for states in the red area, where  $L = 10$  and  $\mathcal{A} = \{0, 6, 7, 8, 9, 10\}$ .

scheme), the policy that always using NOMA for transmission (optimal NOMA policy with  $a \in \{\max\{\lceil \frac{L}{2} \rceil + 1, \lceil \frac{(2^R-1)L}{2^R} \rceil\}, \dots, L-1\}$ ) which reproduces the NOMA policy in [22], the proposed suboptimal policy and the optimal OMA policy that the BS adaptively selects one client to conduct transmission (optimal OMA scheme with  $a \in \{0, L\}$ ) which reproduces the OMA policy in [22] in two cases: 1)  $d_1 = 2$  and  $d_2 = 4$ ; 2)  $d_1 = 3$  and  $d_2 = 6$ . The setting of the rest system parameters is the same as that in Fig. 4. We conduct the simulations by generating  $10^6$  time slots for different transmission SNRs. We can see from Fig. 5 that the proposed suboptimal policy achieves near-optimal performance: its weighted sum of the expected AoI almost

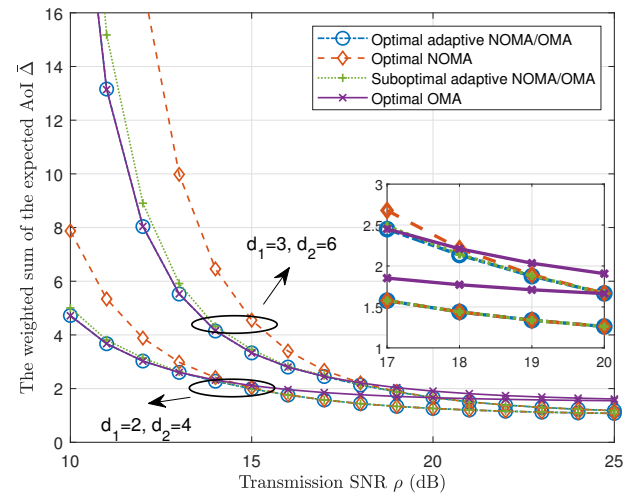


Figure 5: The performance comparison of different policies versus SNR for the two-client scenario with  $w_1 = w_2 = 0.5$ .

coincides with that of the optimal adaptive NOMA/OMA policy especially when the outage probability of two clients are small as shown in Fig. 5. Specifically, the performance of suboptimal policy is closer to that of the optimal adaptive NOMA/OMA policy when  $d_1 = 2$  and  $d_2 = 4$ , compared to the case when  $d_1 = 3$  and  $d_2 = 6$ ; the gap between the AoI performance of the suboptimal policy and that of the optimal adaptive NOMA/OMA policy narrows as the SNR increases.

Moreover, we can see that when SNR is small, e.g.,  $\text{SNR} < 15\text{dB}$ , the performance of the optimal adaptive NOMA/OMA scheme and that of the optimal OMA scheme are almost the same in Fig. 5. This is due to the low SNR, which leads to a higher outage probability for both OMA and NOMA. The situation for NOMA is even worse. As such, both optimal adaptive NOMA/OMA policy and the suboptimal policy will prefer not to choose NOMA scheme but use OMA scheme. Thus, these two policies have similar performance. As SNR increases, the weighted sum of the expected AoI of optimal OMA policy will approach 1.5, when  $w_1 = w_2 = 0.5$ . This is the optimal performance under the OMA scheme. As the outage probability of each client is approaching 0, the instantaneous age of each client will equal to 1 and 2 iteratively.


Furthermore, we can see from Fig. 5 that the performance of optimal adaptive NOMA/OMA policy and that of suboptimal policy and NOMA policy are relatively close when SNR is large, e.g.,  $\text{SNR} \geq 20\text{dB}$ . This is because both optimal adaptive NOMA/OMA policy and suboptimal policy are more likely to choose NOMA for transmission to both clients at the same time. When SNR is large enough, the optimal performance of both the optimal adaptive NOMA/OMA policy and the suboptimal policy approaches 1 as the instantaneous AoI of each client will be always 1, thanks to almost no outage for both clients in NOMA at high SNR. The BS thus always chooses NOMA scheme to conduct transmissions to both clients. In addition, NOMA is better than optimal OMA when

SNR > 16dB for  $d_1 = 2$  and  $d_2 = 4$  and SNR > 19dB for  $d_1 = 3$  and  $d_2 = 6$ . This shows the benefits of NOMA in timely status update when SNR is large.


### B. Multi-client scenario

In this subsection, we evaluate the effectiveness of approximation of the max-weight policy in multi-client scenario and studies how the proposed algorithm works. We conduct all simulations by generating  $10^5$  time slots for different transmission SNR  $\rho = \bar{p}/\sigma^2$ . We consider the scenario with a BS conducting timely status update to 5 clients with normalized distance  $d_i = 6 - i$ ,  $i \in \{1, 2, \dots, 5\}$ . We set path loss exponent  $\tau = 2$  and the target data rate  $R = 1$ . Fig. 6a illustrates the performance of different policies under different transmission SNR, including: 1) max-weight policy under adaptive NOMA/OMA solved by exhaustive search in each time slot (MW-N/OMA), 2) approximated convex optimization policy (termed AP-N/OMA), 3) approximated convex optimization policy under NOMA with fixed client number  $K$  (termed AP-NOMA-F- $K$ ) and 4) OMA scheme that selects the client corresponding to achieve maximum expected age drop to serve as in [14] (termed MW-OMA). We can see that similar to the results of the two-client scenario, when the SNR is low, the AoI performance under different NOMA schemes (i.e., AP-NOMA-F- $K$ ) is poor, due the relatively large outage probability of NOMA scheme in low SNR scenario, comparing with MW-OMA scheme. Specifically, when SNR  $\rho \leq 13$ dB, the performance of AP-NOMA-F- $K_1$  is worse than that of AP-NOMA-F- $K_2$ , if  $K_1 > K_2$ . As the transmission SNR increases, the performance of AP-NOMA-F- $K$  becomes better. The rationale is that when the transmission SNR is sufficiently large, the NOMA scheme that allows to serve more clients achieves reduced age performance. When SNR  $\rho \geq 29$ dB, the performance of AP-NOMA-F- $K_1$  is better than that of AP-NOMA-F- $K_2$ , if  $K_1 > K_2$ . Compared to the AP-NOMA-F- $K$  and MW-OMA, the proposed AP-N/OMA scheme that adaptively switches between NOMA and OMA achieves overall better AoI performance as it allocates power to each client in a more flexible way. In addition, the small gap between MW-N/OMA policy and AP-N/OMA shows the effectiveness of our proposed approximation method which reduces the computation complexity but achieves near-optimal performance.

Fig. 6b shows the probability of scheduling different number of clients of the proposed AP-N/OMA of different SNRs. We can observe that as the SNR increases, it is more likely for the AP-N/OMA to serve more users. This well coincides with the effect in Fig.6a where the performance of AP-N/OMA is close to the performance of AP-NOMA-F-2 when SNR is small, and close to the performance of AP-NOMA-F-5 as SNR increases. We can also find some the fluctuation of the probability of scheduling different number of clients in Fig. 6b which could result from the randomness of outage for each client in the transmission and the approximation that we made in Problem 7.

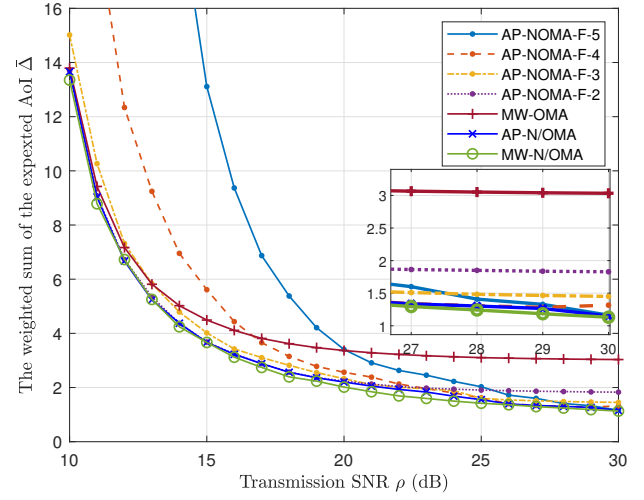

(a) The performance comparison of different policies versus SNR

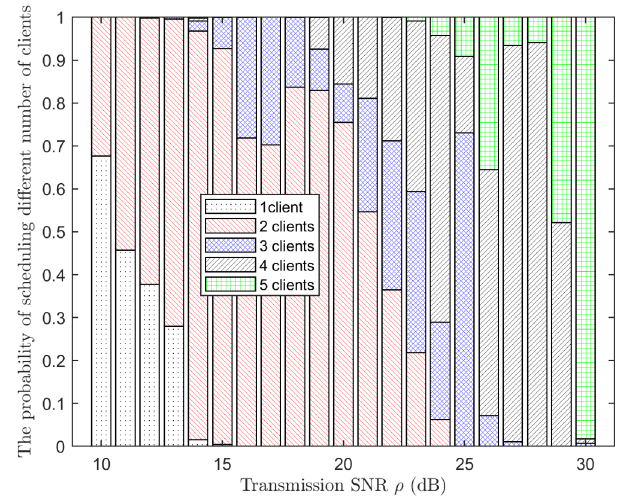

(b) The probability of scheduling different number of clients of AP-N/OMA versus SNR

Figure 6: The performance comparison of different policies and the probability scheduling different number of users of AP-N/OMA versus SNR for multi-client scenario,  $N = 5$  with  $w_i = 1/N$ ,  $\forall i \in \{1, 2, \dots, 5\}$ .

Fig. 7 plots the curves of the weighted sum of expected AoI performance for MW-OMA policy, AP-N/OMA policy, AP-NOMA-F- $K$  policy and MW-N/OMA policy versus the number of clients in the network. The network with increasing number of clients is considered with  $N \in \{2, 3, 4, 5, 6\}$ , the normalized distance of  $i$ th client in the system with  $N$  clients is  $d_i = N+1-i$  and weighted parameter  $w_i = 1/N$ . As shown in Fig. 7, the performance of AP-N/OMA scheme is close to that of MW-N/OMA. Moreover, compared to the MW-OMA scheme, it achieves significant performance improvement. We can see that the performance of AP-NOMA-F-2 policy is comparable to that of AP-N/OMA policy. This indicates that at the transmission SNR  $\rho = 20$  dB, it is suitable to use NOMA to serve 2 clients in each time slot. We can also find that



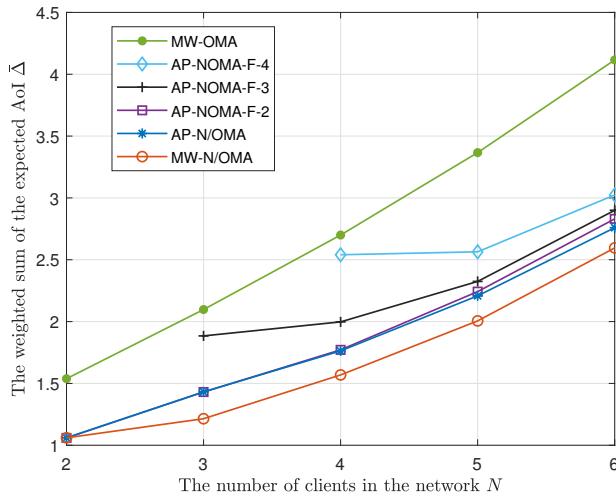


Figure 7: Simulation of network with different number of clients  $N$  with  $w_i = 1/N$ ,  $\forall i$  and transmission SNR  $\rho = 20$  dB.

the performance of AP-NOMA-F- $K$  policy decreases as  $K$  increases. This is understandable as the transmission to more than 2 clients using the NOMA scheme will involve a large error probability, especially when the SNR is not large enough. Besides, the AP-NOMA scheme has a slow speed of AoI increase due to the increasing number of clients in the network, comparing with MW-OMA scheme. The performance gap between MW-OMA and AP-NOMA and that between MW-OMA and MW-NOMA, both increase as the number of clients in the network increases. This shows the potential of adaptive NOMA/OMA scheme in achieving reduced AoI performance for multi-client network. The rationale behind is that in MW-OMA scheme, only one client can be served to have potential AoI drop while other clients' AoI will certainly increase. The increasing number of clients in the network makes more clients have AoI increase. Thus, the age of network will increase. While for adaptive NOMA/OMA, as more than one client can be served at each time slot, the speed of AoI increase due to the increasing number of clients in the network will slow down.

## VI. CONCLUSIONS

In this paper, we considered a wireless network with a base station (BS) conducting timely transmission to multiple clients in a time-slotted manner. The BS can adaptively switch between NOMA and OMA for the downlink transmission to minimize the AoI of the network. We studied both two-client scenario and multi-client scenario. For the two-client scenario, we developed an optimal policy for the BS to decide whether to use NOMA or OMA for downlink transmission based on the instantaneous AoI of both clients in order to minimize the weighted sum of the expected AoI of the network. This was achieved by formulating and resolving a Markov Decision Process (MDP) problem. We proved the existence of an optimal stationary and deterministic policy. Action elimination

was conducted to reduce the computation complexity. The optimal policy is shown to have a switching-type property with obvious decision boundaries. A suboptimal policy with lower computation complexity was also proposed, which is shown to achieve near-optimal performance according to simulation results.

For the multi-client scenario, inspired by the proposed suboptimal policy, we formulated a nonlinear optimization problem to determine the optimal power allocated to each client by maximizing the expected AoI drop of the network in each time slot. We managed to resolve the formulated problem by approximating it as a convex optimization problem. Simulation results validated the tightness of the approximation. The performance adaptive NOMA/OMA scheme by solving the convex optimization was shown to be close to that of max-weight policy solved by exhaustive search. Besides, the adaptive NOMA/OMA scheme has achieved significantly reduced AoI compared to OMA scheme, especially when the number of clients in the network is large and the transmission SNR is high.

## REFERENCES

- [1] Q. Wang, H. Chen, Y. Li, and B. Vucetic, "Minimizing age of information via hybrid noma/oma," in *2020 IEEE International Symposium on Information Theory (ISIT)*, 2020, pp. 1753–1758.
- [2] S. Kaul, R. Yates, and M. Gruteser, "Real-time status: How often should one update?" in *2012 Proceedings IEEE INFOCOM*. IEEE, 2012, pp. 2731–2735.
- [3] Q. Wang, H. Chen, Y. Gu, Y. Li, and B. Vucetic, "Minimizing the age of information of cognitive radio-based iot systems under a collision constraint," *IEEE Transactions on Wireless Communications*, pp. 1–1, 2020.
- [4] E. T. Ceran, D. Gündüz, and A. Gyöngy, "Average age of information with hybrid arq under a resource constraint," *IEEE Transactions on Wireless Communications*, vol. 18, no. 3, pp. 1900–1913, 2019.
- [5] B. Wang, S. Feng, and J. Yang, "To skip or to switch? minimizing age of information under link capacity constraint," in *2018 IEEE 19th International Workshop on Signal Processing Advances in Wireless Communications (SPAWC)*. IEEE, 2018, pp. 1–5.
- [6] Q. Wang, H. Chen, Y. Li, Z. Pang, and B. Vucetic, "Minimizing age of information for real-time monitoring in resource-constrained industrial iot networks," in *2019 IEEE 17th International Conference on Industrial Informatics (INDIN)*, vol. 1, 2019, pp. 1766–1771.
- [7] S. K. Kaul, R. D. Yates, and M. Gruteser, "Status updates through queues," in *2012 46th Annual Conference on Information Sciences and Systems (CISS)*. IEEE, 2012, pp. 1–6.
- [8] Y. Gu, H. Chen, Y. Zhou, Y. Li, and B. Vucetic, "Timely status update in internet of things monitoring systems: An age-energy tradeoff," *IEEE Internet of Things Journal*, 2019.
- [9] Y. Sun, E. Uysal-Biyikoglu, R. D. Yates, C. E. Koksall, and N. B. Shroff, "Update or wait: How to keep your data fresh," *IEEE Transactions on Information Theory*, vol. 63, no. 11, pp. 7492–7508, 2017.
- [10] M. Costa, M. Codreanu, and A. Ephremides, "On the age of information in status update systems with packet management," *IEEE Transactions on Information Theory*, vol. 62, no. 4, pp. 1897–1910, 2016.
- [11] Y. Gu, H. Chen, C. Zhai, Y. Li, and B. Vucetic, "Minimizing age of information in cognitive radio-based iot systems: Underlay or overlay?" *IEEE Internet of Things Journal*, 2019.
- [12] I. Kadota, A. Sinha, and E. Modiano, "Optimizing age of information in wireless networks with throughput constraints," in *IEEE INFOCOM 2018-IEEE Conference on Computer Communications*. IEEE, 2018, pp. 1844–1852.
- [13] I. Kadota, A. Sinha, E. Uysal-Biyikoglu, R. Singh, and E. Modiano, "Scheduling policies for minimizing age of information in broadcast wireless networks," *IEEE/ACM Transactions on Networking (TON)*, vol. 26, no. 6, pp. 2637–2650, 2018.

- [14] I. Kadota and E. Modiano, "Minimizing the age of information in wireless networks with stochastic arrivals," *IEEE Transactions on Mobile Computing*, pp. 1–1, 2019.
- [15] R. D. Yates and S. K. Kaul, "Status updates over unreliable multiaccess channels," in *2017 IEEE International Symposium on Information Theory (ISIT)*. IEEE, 2017, pp. 331–335.
- [16] Z. Jiang, B. Krishnamachari, S. Zhou, and Z. Niu, "Can decentralized status update achieve universally near-optimal age-of-information in wireless multiaccess channels?" in *2018 30th International Teletraffic Congress (ITC 30)*, vol. 1. IEEE, 2018, pp. 144–152.
- [17] A. Maatouk, M. Assaad, and A. Ephremides, "Minimizing the age of information in a csma environment," in *2019 International Symposium on Modeling and Optimization in Mobile, Ad Hoc, and Wireless Networks (WiOPT)*, 2019, pp. 1–8.
- [18] H. Chen, Y. Gu, and S. C. Liew, "Age-of-information dependent random access for massive iot networks," in *IEEE INFOCOM 2020 - IEEE Conference on Computer Communications Workshops (INFOCOM WKSHPS)*, 2020, pp. 930–935.
- [19] Y.-P. Hsu, E. Modiano, and L. Duan, "Scheduling algorithms for minimizing age of information in wireless broadcast networks with random arrivals," *IEEE Transactions on Mobile Computing*, 2019.
- [20] B. Zhou and W. Saad, "Joint status sampling and updating for minimizing age of information in the internet of things," *IEEE Transactions on Communications*, vol. 67, no. 11, pp. 7468–7482, 2019.
- [21] —, "Minimum age of information in the internet of things with non-uniform status packet sizes," *IEEE Transactions on Wireless Communications*, vol. 19, no. 3, pp. 1933–1947, 2020.
- [22] A. Maatouk, M. Assaad, and A. Ephremides, "Minimizing the age of information: Noma or oma?" in *IEEE INFOCOM 2019 - IEEE Conference on Computer Communications Workshops (INFOCOM WKSHPS)*, 2019, pp. 102–108.
- [23] Z. Ding, Y. Liu, J. Choi, Q. Sun, M. Elkashlan, I. Chih-Lin, and H. V. Poor, "Application of non-orthogonal multiple access in lte and 5g networks," *IEEE Communications Magazine*, vol. 55, no. 2, pp. 185–191, 2017.
- [24] Y. Saito, Y. Kishiyama, A. Benjebbour, T. Nakamura, A. Li, and K. Higuchi, "Non-orthogonal multiple access (noma) for cellular future radio access," in *2013 IEEE 77th vehicular technology conference (VTC Spring)*. IEEE, 2013, pp. 1–5.
- [25] Z. Dong, H. Chen, J.-K. Zhang, and L. Huang, "On non-orthogonal multiple access with finite-alphabet inputs in z-channels," *IEEE Journal on Selected Areas in Communications*, vol. 35, no. 12, pp. 2829–2845, 2017.
- [26] Y. Yu, H. Chen, Y. Li, Z. Ding, and B. Vucetic, "On the performance of non-orthogonal multiple access in short-packet communications," *IEEE Communications Letters*, vol. 22, no. 3, pp. 590–593, 2017.
- [27] W. Wang, J. Tang, N. Zhao, X. Liu, X. Y. Zhang, Y. Chen, and Y. Qian, "Joint precoding optimization for secure swipt in uav-aided noma networks," *IEEE Transactions on Communications*, vol. 68, no. 8, pp. 5028–5040, 2020.
- [28] N. Zhao, Y. Li, S. Zhang, Y. Chen, W. Lu, J. Wang, and X. Wang, "Security enhancement for noma-uav networks," *IEEE Transactions on Vehicular Technology*, vol. 69, no. 4, pp. 3994–4005, 2020.
- [29] W. B. Powell, *Approximate Dynamic Programming: Solving the curses of dimensionality*. John Wiley & Sons, 2007, vol. 703.
- [30] J. Gittins, K. Glazebrook, and R. Weber, *Multi-armed bandit allocation indices*. John Wiley & Sons, 2011.
- [31] J. Sun, Z. Jiang, S. Zhou, and Z. Niu, "Optimizing information freshness in broadcast network with unreliable links and random arrivals: An approximate index policy," in *IEEE INFOCOM 2019-IEEE Conference on Computer Communications Workshops (INFOCOM WKSHPS)*. IEEE, 2019, pp. 115–120.
- [32] I. S. Gradshteyn and I. M. Ryzhik, *Table of integrals, series, and products*. Academic press, 2014.
- [33] J. Cui, Z. Ding, and P. Fan, "A novel power allocation scheme under outage constraints in noma systems," *IEEE Signal Processing Letters*, vol. 23, no. 9, pp. 1226–1230, 2016.
- [34] M. L. Puterman, *Markov Decision Processes: Discrete Stochastic Dynamic Programming*. John Wiley & Sons, 2014.
- [35] Q. Wang, H. Chen, C. Zhao, Y. Li, P. Popovski, and B. Vucetic, "Optimizing information freshness via multiuser scheduling with adaptive noma/oma," *arXiv preprint arXiv:2007.04072*, 2020.
- [36] P. Xu, Y. Yuan, Z. Ding, X. Dai, and R. Schober, "On the outage performance of non-orthogonal multiple access with 1-bit feedback,"

*IEEE Transactions on Wireless Communications*, vol. 15, no. 10, pp. 6716–6730, 2016.

- [37] P. Xu and K. Cumanan, "Optimal power allocation scheme for non-orthogonal multiple access with  $\alpha$ -fairness," *IEEE Journal on Selected Areas in Communications*, vol. 35, no. 10, pp. 2357–2369, 2017.
- [38] Z. Ding, Z. Yang, P. Fan, and H. V. Poor, "On the performance of non-orthogonal multiple access in 5g systems with randomly deployed users," *IEEE signal processing letters*, vol. 21, no. 12, pp. 1501–1505, 2014.
- [39] L. I. Sennott, *Stochastic dynamic programming and the control of queueing systems*. John Wiley & Sons, 2009, vol. 504.




**Qian Wang** received the B.S. degree in biomedical engineering from the Southeast University, Nanjing, China, in 2017. She is currently working toward the Ph.D. degree in telecommunication with The University of Sydney, Sydney, Australia. She holds a postgraduate research scholarship. She is a visiting student the Chinese University of Hong Kong since Sep 2019. Her research involves Industrial Internet of Things (IIoT), with a particular focus on timely status update (Age of Information) and anomaly detection in industrial control networks.




**He (Henry) Chen** is an Assistant Professor with the Department of Information Engineering, the Chinese University of Hong Kong, Hong Kong SAR, China. He received the Ph.D. degree in Electrical Engineering from the University of Sydney, Sydney, Australia, in 2015. He was a Postdoctoral Research Fellow with the School of Electrical and Information Engineering, the University of Sydney, from 2015 to 2019.

Dr. Chen's current research interests are in the field of wireless Internet of Things (IoT) systems, and their applications in manufacturing, logistics, healthcare, and smart city. Dr. Chen is serving on the editorial boards of IEEE Transactions on Wireless Communications and IEEE Wireless Communications Letters.



**Changhong Zhao** (Senior Member, IEEE) is an Assistant Professor with the Department of Information Engineering, the Chinese University of Hong Kong, HKSAR, China. He received the B.E. degree in automation from Tsinghua University, Beijing, China, in 2010, and the Ph.D. degree in electrical engineering from California Institute of Technology, Pasadena, CA, USA, in 2016. From 2016 to 2019, he worked with the National Renewable Energy Laboratory, Golden, CO, USA. His research is on control and optimization of networked systems such as smart grid. He received Wilts Prize from Caltech EE Department and Demetriades Prize from Caltech EAS Division for best PhD thesis, the 2020/21 Early Career Award from Hong Kong Research Grants Council, the 2021 IEEE PES Prize Paper Award, and a 2021 Best Paper of IEEE Transactions on Power Systems.



**Yonghui Li** (M'04-SM'09-F'19) received his PhD degree in November 2002 from Beijing University of Aeronautics and Astronautics. From 1999 to 2003, he was affiliated with Linkair Communication Inc, where he held a position of project manager with responsibility for the design of physical layer solutions for the LAS-CDMA system. Since 2003, he has been with the Centre of Excellence in Telecommunications, the University of Sydney, Australia. He is now a Professor in School of Electrical and Information Engineering, University of Sydney. He

is the recipient of the Australian Queen Elizabeth II Fellowship in 2008 and the Australian Future Fellowship in 2012.

His current research interests are in the area of wireless communications, with a particular focus on MIMO, millimeter wave communications, machine to machine communications, coding techniques and cooperative communications. He holds a number of patents granted and pending in these fields. He is now an editor for IEEE transactions on communications and IEEE transactions on vehicular technology. He was also the guest editor for IEEE JSAC Special issue on Millimeter Wave Communications for Future Mobile Networks. He received the best paper awards from IEEE International Conference on Communications (ICC) 2014, IEEE PIMRC 2017, and IEEE Wireless Days Conferences (WD) 2014.



**Petar Popovski** (Fellow, IEEE) is a Professor at Aalborg University, where he heads the section on Connectivity and a Visiting Excellence Chair at the University of Bremen. He received his Dipl.-Ing and M. Sc. degrees in communication engineering from the University of Sts. Cyril and Methodius in Skopje and the Ph.D. degree from Aalborg University in 2005. He is a Fellow of the IEEE. He received an ERC Consolidator Grant (2015), the Danish Elite Researcher award (2016), IEEE Fred W. Ellersick prize (2016), IEEE Stephen O. Rice prize (2018),

Technical Achievement Award from the IEEE Technical Committee on Smart Grid Communications (2019), the Danish Telecommunication Prize (2020) and Villum Investigator Grant (2021). He is a Member at Large at the Board of Governors in IEEE Communication Society, Vice-Chair of the IEEE Communication Theory Technical Committee and IEEE TRANSACTIONS ON GREEN COMMUNICATIONS AND NETWORKING. He is currently an Area Editor of the IEEE TRANSACTIONS ON WIRELESS COMMUNICATIONS. Prof. Popovski was the General Chair for IEEE SmartGridComm 2018 and IEEE Communication Theory Workshop 2019. His research interests are in the area of wireless communication and communication theory. He authored the book "Wireless Connectivity: An Intuitive and Fundamental Guide", published by Wiley in 2020.



**Branka Vucetic** (SM'00-F'03) is an ARC Laureate Fellow and Professor of Telecommunications, Director of the Centre of Excellence in Telecommunications at the University of Sydney. During her career she has held research and academic positions in Yugoslavia, Australia, UK and China. Her research interests include coding, communication theory and signal processing and their applications in wireless networks and industrial internet of things. Prof. Branka Vucetic co-authored four books and more than four hundred papers in telecommunications

journals and conference proceedings. She is a Fellow of the Australian Academy of Technological Sciences and Engineering and a Fellow of the IEEE.