

## Microcalorimetric Study of Carbonating Produced Water as a Promising CO<sub>2</sub> Storage and Enhanced Oil Recovery Method

Cobos, Jacquelin; Kissami, Yassin; Alkutaini, Issam Abdolkareem; Søgaard, Erik Gydesen

*Published in:*  
Energies

*DOI (link to publication from Publisher):*  
[10.3390/en15082888](https://doi.org/10.3390/en15082888)

*Creative Commons License*  
CC BY 4.0

*Publication date:*  
2022

*Document Version*  
Publisher's PDF, also known as Version of record

[Link to publication from Aalborg University](#)

*Citation for published version (APA):*

Cobos, J., Kissami, Y., Alkutaini, I. A., & Søgaard, E. G. (2022). Microcalorimetric Study of Carbonating Produced Water as a Promising CO<sub>2</sub> Storage and Enhanced Oil Recovery Method. *Energies*, 15(8), Article 2888. <https://doi.org/10.3390/en15082888>

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

### Take down policy

If you believe that this document breaches copyright please contact us at [vbn@aub.aau.dk](mailto:vbn@aub.aau.dk) providing details, and we will remove access to the work immediately and investigate your claim.



## Article

# Microcalorimetric Study of Carbonating Produced Water as a Promising CO<sub>2</sub> Storage and Enhanced Oil Recovery Method

Jacquelin E. Cobos <sup>1,2,†</sup> , Yassin Kissami <sup>2,†</sup>, Issam Abdolkareem Alkutaini <sup>2,†</sup> and Erik G. Søgaard <sup>2,\*,†</sup> 

<sup>1</sup> Department of Mechanical and Electrical Engineering, University of Southern Denmark, 6400 Sønderborg, Denmark; jacobosmora@sdu.dk

<sup>2</sup> Department of Chemistry and Bioscience, Aalborg University, 6700 Esbjerg, Denmark; yassin.kissami@hotmail.com (Y.K.); issamkutaini@yahoo.com (I.A.A.)

\* Correspondence: egs@bio.aau.dk

† These authors contributed equally to this work.

**Abstract:** Carbonated produced water injection (CPWI) might be considered an efficient alternative to handle the largest waste stream while enhancing the oil recovery and storing carbon dioxide (CO<sub>2</sub>) underground. This study was an attempt to get a deeper understanding of the oil recovery process through synergy between spontaneous imbibition and isothermal titration calorimetry (ITC) experiments. The results from the spontaneous imbibition experiments showed 7% to 11% additional oil recovery in comparison with plain produced water. Rock–fluid and fluid–fluid interactions, evaluated by isothermal titration calorimetry (ITC) experiments, confirmed that the CPW interactions with oil+EFB+chalk and oil+EFB systems are much more exothermic than those with plain PW in those systems. The synergy between spontaneous imbibition and ITC experiments provides an improved understanding of carbonated water injection in carbonate reservoirs.

**Keywords:** enhanced oil recovery (EOR); CO<sub>2</sub>; carbonated produced water injection; rock–fluid; fluid–fluid; interactions



**Citation:** Cobos, J.E.; Kissami, Y.; Alkutaini, I.A.; Søgaard, E.G.

Microcalorimetric Study of Carbonating Produced Water as a Promising CO<sub>2</sub> Storage and Enhanced Oil Recovery Method. *Energies* **2022**, *15*, 2888. <https://doi.org/10.3390/en15082888>

Academic Editor: Rouhi Farajzadeh

Received: 10 March 2022

Accepted: 12 April 2022

Published: 14 April 2022

**Publisher's Note:** MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



**Copyright:** © 2022 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

## 1. Introduction

Awareness of climate change and its negative effects has increased since the global concentration of carbon dioxide (CO<sub>2</sub>) in the atmosphere has been rising significantly [1]. CO<sub>2</sub> emission is an inevitable side-effect of burning fossil fuels, which play an important role in the global energy mix of the 20th century [2]. In order to achieve substantial reductions in greenhouse gas emissions while enabling sustainable energy production, anthropogenic CO<sub>2</sub> must be captured, transported, and stored subsequently in geological formations such as deep saline aquifers, coal beds, and depleted oil and gas reservoirs [3–5]. Among those options, depleted oil and gas reservoirs are the best options because of (1) the presence of a wealth of data since the formations have been extensively evaluated, (2) the existence of infrastructure, and (3) revenue from the incremental oil recovery due to CO<sub>2</sub> injection [6]. CO<sub>2</sub> flooding has been widely and successfully used in many oil fields. It contributes to over 5% of the total United States' oil production. Various CO<sub>2</sub> techniques (continuous/slug injection, simultaneous water and gas injection-SWAG, and the water alternating gas process—WAG) have been developed to recover additional oil from depleted reservoirs while at the same time storing large quantities of CO<sub>2</sub> underground [7,8]. Carbonated water injection (CWI) is gaining rapid attention because it is a viable option that can be used onshore and offshore. This technique was conceptualized in the 1930s, but more serious research started in the 1970s [9]. Basically, in CWI, CO<sub>2</sub> is dissolved in brine prior to its injection into a depleted oil reservoir. CWI is an excellent technique for both EOR and CO<sub>2</sub> sequestration because the solubility of CO<sub>2</sub> in water is higher than that of other gases (e.g., nitrogen and light hydrocarbon gases). The main advantages of CWI are (1) better mobility ratio of CO<sub>2</sub> brine than those of other pure gases, (2) higher density of CO<sub>2</sub> brine

than that of pure brine, which reduces the risk of CO<sub>2</sub> leaking, (3) improvement in the sweep efficiency because it suppresses the fingering problem of the pure CO<sub>2</sub> injection, (4) reduction in viscosity as CO<sub>2</sub> moves from the brine to the oil phase, (5) improvement in the rock wettability towards more water-wet conditions due to fluid-rock interactions, (6) production of oil globules trapped in the pore space due to crude oil swelling, (7) delay in water or gas breakthrough [6,10]. Chen et al. [11] found that carbonated water increases the hydrophilicity due to reductions in the contact angles. Those authors developed a geochemical model that couples CO<sub>2</sub> dissolution, mineral dissolution, and oil and calcite surface chemistry. According to those authors, the model gives information of the mechanistic CO<sub>2</sub>-induced wettability shift, and it can be used in larger reservoir simulators.

Microcalorimetry is a direct appraisal of the heat absorbed or released during a binding interaction between molecules. The measured heat can be used to obtain enthalpy ( $\Delta H$ ) changes which are associated with the adhesion of different fluids onto a rock surface [12–14]. One type of microcalorimetric technique is isothermal titration calorimetry (ITC). It allows one to accurately determine thermodynamic parameters, such as entropy ( $\Delta S$ ), Gibbs free energy ( $\Delta G$ ), affinity constant ( $K_d$ ), and binding stoichiometry ( $n$ ) [12]. The popularity of ITC is because of its robustness, speed, and small sample consumption [15]. The degree of accuracy of this technique is higher than those of alternatives (e.g., Van 't Hoff equation) because the enthalpy is determined from measurements [16]. In our previous works, microcalorimetry was proven to be useful for the understanding of complex rock–fluid and fluid–fluid interactions for both enhanced oil recovery and geothermal energy production [2,13,16–18].

This study aimed to gain insights into the complex rock–fluid and fluid–fluid interactions that take place during carbonated produced water injection (CPWI) through spontaneous imbibition and microcalorimetry experiments. The synergy between those experiments showed which part of the rock–fluid and fluid–fluid system is responsible for the enhanced oil recovery observed during the spontaneous imbibition experiments. To the best of our knowledge, this had not done before, since the rock–fluid and fluid–fluid interactions have not been thoroughly investigated from a calorimetric point of view. The present work fills this gap, clarifying the CW EOR system. Moreover, it provides relevant insights into the usage of produced water for carbonated water injection. The possibility of using produced water for CO<sub>2</sub>-EOR and CO<sub>2</sub> storage in carbonates is appealing, since this fluid is considered to be the most problematic source of waste in the oil and gas industry.

## 2. Materials and Methods

### 2.1. Fluids

Synthetic Ekofisk formation brine (EFB) was prepared by mixing reagent grade salts with distilled water (DW). EFB contains 67.3 g/L NaCl, 14.69 g/L CaCl<sub>2</sub>, 4.45 g/L MgCl<sub>2</sub>, 2.27 g/L SrCl<sub>2</sub>, 0.55 g/L KCl, 0.45 g/L BaCl<sub>2</sub> and 0.33 g/L NaHCO<sub>3</sub>. Halfdan produced water (PW) was obtained from a Danish North Sea well and consists of a mixture of brine, precipitates, crude oil, and possibly other chemicals. The ionic composition of PW was investigated by inductively coupled plasma-optical emission spectrometry (ICP-OES) (PerkinElmer instruments) and an 800 series ion chromatography (IC) instrument from Metrohm. Table 1 presents the composition of PW.

**Table 1.** Ionic composition of the Halfdan produced water (PW).

Ions	Na <sup>+</sup>	Ca <sup>2+</sup>	Mg <sup>2+</sup>	K <sup>+</sup>	Sr <sup>2+</sup>	SO <sub>4</sub> <sup>2−</sup>	Cl <sup>−</sup>	Br <sup>−</sup>	F <sup>−</sup>
Concentration (g/L)	29.2	0.98	0.42	0.51	0.14	0.15	49.0	0.16	0.02

Crude oil from a North Sea carbonate reservoir was used in the experiments presented in this study [16]. Impurities (solid particles and water) were removed by centrifuging the crude oil at 3800 rpm for at least one hour. A Tiamo 2.4, Metrohm autotitrator unit was

used to measure the acid (AN) and basic (BN) numbers. The oil density and viscosity were measured with a DMA 35 Anton Paar density meter and a PVS rheometer from Brookfield, respectively. Table 2 displays the crude oil properties.

**Table 2.** The crude oil's properties.

AN (mg KOH)/g	BN (mg KOH)/g	Viscosity mPa.s	Density g/cm <sup>3</sup>
0.52	1.60	11.94	0.86

## 2.2. Rock Material

Austin chalk was used for spontaneous imbibition and isothermal titration calorimetry (ITC) experiments. A part of the rock material was crushed and grounded with a ball mill to obtain particles with a size of <100 µm. Those particles were used for the ITC experiments and elemental composition testing by a Rigaku supermini 200 X-ray fluorescence (XRF) machine. Table 3 displays the results from the XRF analysis [17].

**Table 3.** X-ray fluorescence (XRF) analysis of Austin chalk.

Compound										
	CaO	MgO	Al <sub>2</sub> O <sub>3</sub>	SiO <sub>2</sub>	P <sub>2</sub> O <sub>5</sub>	SrO	Fe <sub>2</sub> O <sub>3</sub>	K <sub>2</sub> O	SO <sub>3</sub>	Cl
%	95.90	1.20	0.40	1.60	0.20	0.10	0.30	0.10	0.13	0.02

The Austin cores were washed gently with tap water to remove loose particles before the spontaneous imbibition experiments. Dry weights and dimensions of those core plugs were measured using Mitutoyo's Absolute Digimatic Caliper after being dried in a heating cabinet at 65 °C for 2 weeks. Thereafter, the cores were air evacuated and saturated with Ekofisk formation brine (EFB) for 24 h and weighed again. The initial porosity and air permeability of the Austin cores were determined by an AP-608 Automated Permeameter–Porosimeter from Coretest systems. The Austin chalk core properties and an overview of the workflow used in this study are presented in Table 4.

**Table 4.** Core data for Austin chalk and an overview of experiments.

Core id.	l [cm]	d [cm]	PV [mL]	φ %	k <sub>w</sub> [mD]	Aging Method	Aging Time [h]
AC-5	7.64	3.79	24.13	28.00	31.92	Static	1000
AC-6	7.62	3.77	24.86	29.22	30.41	Static	1000
AC-8	7.63	3.74	21.14	25.16	19.36	Static	1000

## 2.3. Aging Procedures


Fully brine-saturated Austin chalk core plugs (AC-5, AC-6, and AC-8) were put inside a desiccator with silica gel to achieve 15% connate water ( $Sw_i$ ). Then, crude oil was injected in both directions at a low flow rate (0.1 mL/min) into a core plug placed in a Hassler-type core holder that was kept in an oven at 50 °C. Note that the confining pressure was 10 bars above the injection pressure, and the back pressure was set to 10 bars. In total, 2 pore volumes (PV) were injected in each direction to achieve uniform initial water saturation. After crude oil saturation, the core plug was wrapped with Teflon to ensure a uniform wettability distribution [19]. Thereafter, the core plug was submerged in aging cells with filtered crude oil and stored at no-flow conditions for 1000 h at 50 °C. Wrapping the cores with teflon avoids the precipitation of heavy fractions in the crude oil on the core boundary (circumference), which causes the imbibition to only occur in the interior of the core plug and not in the outermost layer of the cores. In a previous work [18], it was shown that

limestone cores aged in no-flow conditions (statically) only imbibed oil spontaneously when the inner part was in direct contact with the wetting fluid. Therefore, it was mentioned that all faces open (AFO) boundary conditions could not capture the tendency towards weakly oil-wet conditions in the interior of the core samples in statically-aged core plugs, and special precautions should be taken.

#### 2.4. Spontaneous Imbibition Experiments

An aged core plug was placed inside a high-temperature Amott–Harvey imbibition cell that was modified by adding a relief valve and an injection valve. The carbonated Halfdan produced water (CPW) was injected into the cell up to the level of the slim graduated cylinder. As there was a pressure build up due to free CO<sub>2</sub>; the injection was stopped for 2 h to allow the free CO<sub>2</sub> to re-dissolve in the produced water before the injection was resumed. This filling-up process was done 3 times with a waiting time of 2 h. When the injection was completed, the injection valve was closed to ensure that system was completely sealed and CO<sub>2</sub> did not escape from the Amott cell. The crude oil production was recorded every 2–3 h until it reached a plateau.

A schematic illustration of the setup used for the injection of carbonated water into the Amott cell is presented in Figure 1. As observed, a close system was used for the experiments. In order to determine a comparable amount of CO<sub>2</sub>, the solubility of that gas in distilled water was determined through a solubility vs. temperature plot from Engineering ToolBox [20]. The reading value was 0.75 g CO<sub>2</sub>/kg water, corresponding to a temperature of 50 °C.

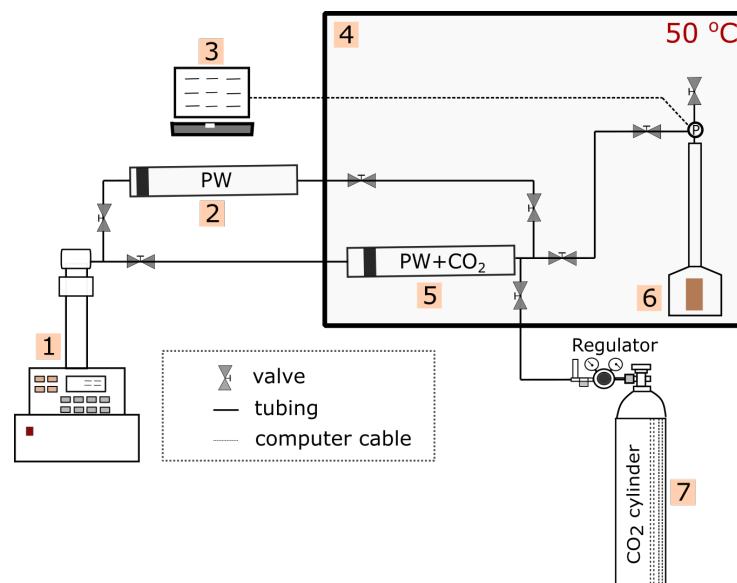

**Figure 1.** Experimental set-up for spontaneous imbibition with carbonated water (produced water with CO<sub>2</sub>: 1—Teledyne ISCO pump, 2—piston#2, 3—computer, 4—oven, 5—piston#3, 6—Amott cell with core plug, 7—CO<sub>2</sub> cylinder.

The solubility value was converted to its equivalents in saline water using Equation (1) proposed by Kilybay et al. [21]. In this equation,  $R_{sb}$  is the CO<sub>2</sub> solubility in saline water (g/kg),  $R_{sw}$  is the CO<sub>2</sub> solubility in water (g/kg),  $C$  is the total dissolved solids in the water given as weight percentage of salts (kg) to the weight of water (% kg/kg), and  $T$  is temperature (°F).

$$\log\left(\frac{R_{sb}}{R_{sw}}\right) = -0.028 * C * T^{-0.12} \quad (1)$$

Thereafter, the solubility was converted to a mole basis, and the number of CO<sub>2</sub> moles required to saturate 400 mL Halfdan produced water (PW) was determined. The calculations indicate that 0.00529 mol is needed for each imbibition experiment. The pressure

required to inject those 0.00529 mols of CO<sub>2</sub> in piston#3 was calculated by the ideal gas law. The results show that 2.9 bar was needed to saturate the 400 mL PW that was injected from piston#2 to piston#3 (see Figure 1). Once PW has been injected, piston#3 should be left inside the oven kept at 50 °C in no-flow conditions for 24 h. According to Kilybay et al. [21], this should be done to ensure the complete miscibility of CO<sub>2</sub> in the fluid.

### 2.5. Microcalorimetry Procedures

A multichannel TAM IV microcalorimetric system from TA Instruments was used to characterize the injection of carbonated Halfdan produced water (CPW) into the same rock+fluid system (chalk+EFB+crude oil). One-hundred milligrams of Austin chalk was placed in an ampule. Then, 200 µL of EFB and 200 µL of crude oil were added to the rock particles to resemble an oil reservoir [13,16–18]. The ampule was lowered into the TA microcalorimeter until it reached its final measuring position. Thereafter, CPW was added to the chalk+EFB+oil system. Note that the interval between injections was 600 s. The interaction between CPW and EFB+crude oil was also determined similarly but without the rock particles.

Baseline experiments were also carried out using a similar procedure. The experiments consisted in adding separately PW into chalk+EFB+crude oil and EFB+crude oil systems.

The ITC experiments were analyzed by *NanoAnalyze*<sup>TM</sup> software from TA Instruments.


## 3. Results and Discussion

### 3.1. Spontaneous Imbibition

The imbibition fluid for AC-5 was Halfdan produced water, whereas it was carbonated Halfdan produced water for AC-6 and AC-8. Figure 2 shows the spontaneous oil imbibition for Austin core plugs after being aged statically for 1000 h. The time from the core plugs being submerged in the imbibition fluid (produced water or carbonated produced water) until they started expelling oil was less than 1 h. This short induction time shows the potential of produced water to enhance oil recovery. As shown in Figure 2, carbonated produced water gives higher oil recovery than plain produced water.

An increment of between 7% and 11% was obtained when the imbibition fluid was saturated with CO<sub>2</sub> in comparison to Halfdan produced water (PW). Sohrabi et al. [3] also obtained higher oil recovery with carbonated water injection (CWI) than with plain water injection. The brine was made of 0.8 wt% sodium chloride (NaCl) and 0.2 wt% calcium chloride hexahydrate (CaCl<sub>2</sub> · 6H<sub>2</sub>O). Those authors concluded that the potential of CWI in both secondary and tertiary recovery modes is significant. This is because 19% PV incremental oil recovery in comparison to plain WI was obtained in secondary mode, whereas 9.2% PV incremental oil was produced in tertiary mode. Seyyedi et al. [22] also observed a significant additional oil recovery by using carbonated synthetic seawater. Additional production of 10% of the original oil in place (OOIP) was obtained in a heterogeneous sandstone core plug. Consequently, the performance of a carbonated fluid is not impacted by heterogeneities in the rock. Zou et al. [23] obtained significant additional production in tight oil reservoirs compared to conventional waterflooding in both secondary and tertiary injection modes by 20.3% and 11.3%, respectively. The proposed mechanisms in the literature for the better performance of carbonated water injection are (1) oil swelling and subsequent viscosity reduction due to CO<sub>2</sub> dissolution in the oil phase, (2) improvement in sweep efficiency due to reconnection of isolated droplets and fluid flow diversion, and (3) wettability alteration [9].



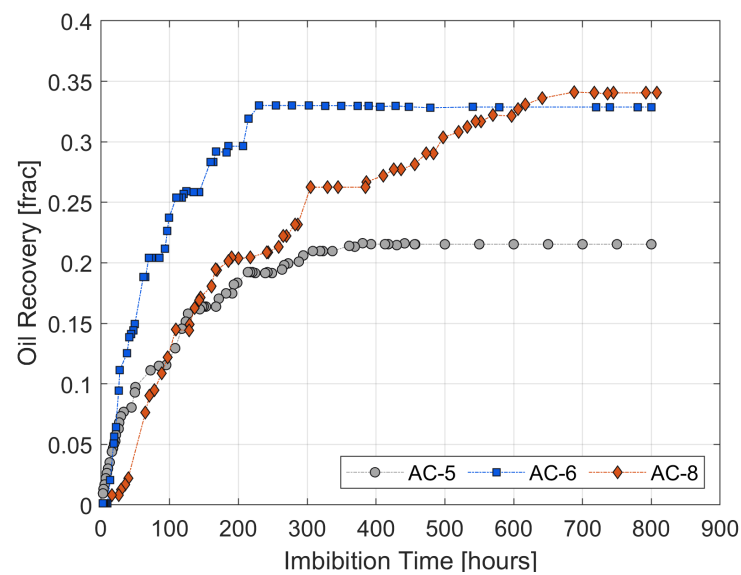

**Figure 2.** Spontaneous oil imbibition characteristics for core plugs exposed to formation water (AC-5) and carbonated formation water (AC-6, AC-8).

The ionic compositions of the brines before and after the spontaneous imbibition experiments, with a focus on the alkaline earth metal group, are presented in Table 5. As observed,  $\text{Ca}^{2+}$  and  $\text{SO}_4^{2-}$  concentrations increased after the spontaneous imbibition with CPW in AC-6 and AC-8 core plugs. This could indicate that carbonic acid dissolved minerals containing those elements (e.g., calcite and anhydrite). In Table 5, slight changes in the  $\text{Mg}^{2+}$  and  $\text{Sr}^{2+}$  concentrations are shown, which could be related to the minor presence of those minerals. Riazi [24] presented scanning electron microscopy (SEM) pictures of a sandstone core before and after being in contact with carbonated water for 2 weeks at a pressure of 2000 psi and a temperature of 38 °C. The SEM images show that effectively the sandstone was corroded by bicarbonate due to prolonged exposure to the carbonated water.

**Table 5.** Ionic composition measured as g/L of all the fluids used in the spontaneous imbibition experiments for AC5 (plain PW), AC6(CPW), and AC8 (CPW).

Ions	Before Experiment	After Experiment		
		AC-5 (Plain PW)	AC-6 (CPW)	AC-8 (CPW)
$\text{Ca}^{+2}$	0.98	0.97	1.24	1.30
$\text{Mg}^{+2}$	0.42	0.43	0.41	0.49
$\text{Sr}^{+2}$	0.14	0.15	0.15	0.18
$\text{SO}_4^{-2}$	0.15	0.18	0.85	0.90


### 3.2. Rock–Fluid and Fluid–Fluid Interactions

The interaction between carbonated produced water (CPW) and the oil+EFB+chalk system was measured to gain further insights into the mechanisms responsible for the higher imbibition rate reported previously. The raw heat signal registered in the TAM IV microcalorimeter when CPW was added directly into the chalk+EFB+oil system is presented in Figure 3. The heat flow signal indicates an exothermic event according to the data collection of the ITC equipment. In other words, when CPW contacted the chalk+EFB+oil system, an exothermic process took place inside the microcalorimeter's reaction vessel. It can be noticed in Figure 3 that the heights of the peaks are larger at the beginning of the process than at the end. This is because the  $\text{CO}_2$  transfer to the crude oil was higher at the beginning than at the end due to more and more saturation of the oil, EFB, chalk system with  $\text{CO}_2$ . Note that each peak observed in the figure represents a single addition of 9.947  $\mu\text{L}$  into the chalk+EFB+oil system.



CPW was injected into the crude oil+EFB system to determine the physicochemical interactions that occur at the oil–water interface. The heat flow obtained for the injection of CPW into crude oil+EFB (fluid–fluid interaction) is presented in Figure 3. As observed, the peaks are much higher than the ones observed in Figure 3. This could indicate that the exothermic process that occurs when CPW is injected into an oil reservoir is driven by the fluid–fluid interactions and the dissolution of the chalk with carbonic acid is entropy driven.

Baseline ITC experiments were also performed to distinguish the impacts of CO<sub>2</sub> in the rock–fluid and fluid–fluid interactions. In this case, Halfdan produced water (PW) was injected into either crude oil+EFB+chalk or crude oil+EFB systems. The thermogram of the interaction between PW and those systems is presented in Figure 3. As observed, no major changes were registered when PW was added to those systems. In other words, PW slightly interacts with the rock but not with the in situ crude oil. Those results show that effectively, crude oil was being diffused from CPW to the crude oil phase, giving a higher oil recovery.

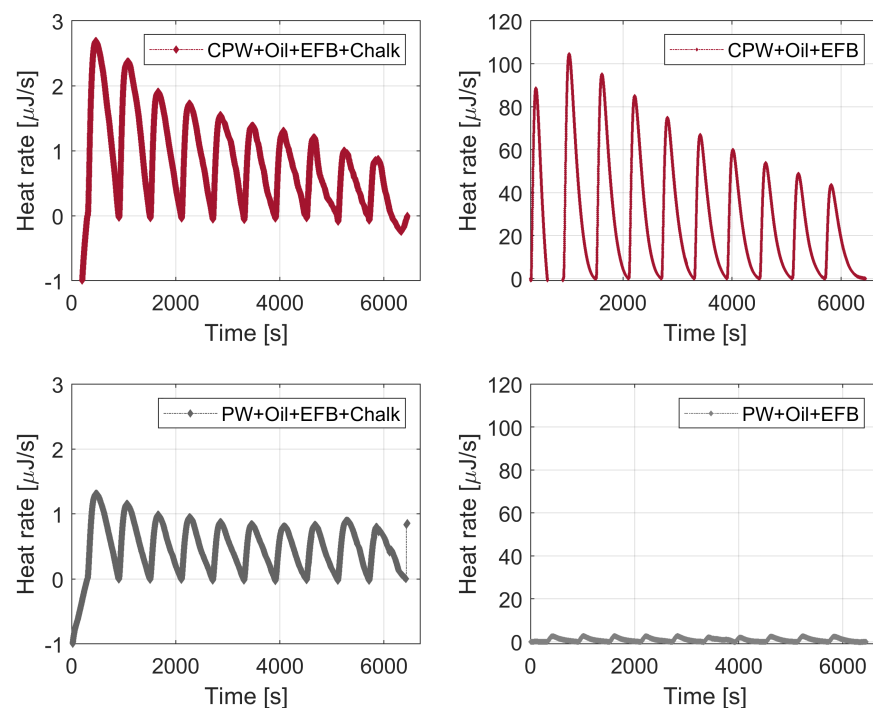

**Figure 3.** Heat rate versus time for carbonated produced water and produced water titrated into the system of oil, Ekofisk brine and chalk

The integration of the heat rate observed in Figure 3 over the baseline (time) gives the heat developed by each injection of 9.947  $\mu\text{L}$  of CPW or PW into the rock–fluid (chalk+EFB+oil) or fluid–fluid (oil+EFB) system. Table 6 presents the results from the integration of the area between peaks and the baseline.

**Table 6.** Heat values for rock–fluid and fluid–fluid interactions.


Injection	CPW System (mJ)		Heat PW System (mJ)	
	Oil+EFB+Chalk	Oil+EFB	Oil+EFB+Chalk	Oil+EFB
1	−0.98	−16.35	−0.47	−0.62
2	−0.85	−23.86	−0.38	−0.59
3	−0.64	−22.43	−0.32	−0.57
4	−0.59	−19.89	−0.30	−0.59
5	−0.55	−17.91	−0.28	−0.58
6	−0.44	−16.10	−0.28	−0.62
7	−0.42	−13.98	−0.26	−0.36
8	−0.31	−12.57	−0.26	−0.54
9	−0.30	−11.36	−0.31	−0.60
10	−0.18	−10.86	−0.29	−0.53

The results presented in Table 6 clearly show that the heat responses for injecting CPW into chalk+EFB+oil and oil+EFB systems are much higher than those for injecting PW into the same systems. In this sense, the total interaction heat for the injection into the chalk+EFB+oil system was −6.02 mJ, whereas the injection of PW into the same rock–fluid system was −3.16 mJ. Thus, the overall reaction was more exothermic for CPW than PW.

When carbonated water makes contact with the in situ oil, CO<sub>2</sub> migrates from the water phase into the oil phase because it has a higher solubility in hydrocarbons [25]. Seyyedi et al. [4] conducted a series of high pressure and high-temperature direct visualizations (micromodel) and compositional variation (PVT) experiments. Those experiments were done to get insights into the complex fluid–fluid interactions and compositional changes that occur during carbonated water injection (CWI). According to these authors, a one-way CO<sub>2</sub> mass transfer from the injection fluid into crude oil takes place during CWI. This mass transfer results in an oil viscosity reduction that leads to a color change (oil became lighter) due to rapid nucleation of CO<sub>2</sub> within the oil phase. Seyyedi and coauthors [4] also found that the in situ oil composition does not change during carbonated water injection. Only after extensive pore volumes of CW was the in situ crude oil composition changed due to the small extraction of light components into a condensate phase. Those results are in accordance with the microcalorimetry findings reported in this work, in which CO<sub>2</sub> dissolved in the carbonated fluid was mainly interacting with the in situ crude oil. As presented in Table 6, the total interaction heat for CPW into oil+EFB was −165.32 mJ. The interaction between PW and the reservoir fluids was negligible because the PW did not contain CO<sub>2</sub>.

A graphical representation of the microcalorimetric system and the one-way CO<sub>2</sub> mass transfer into the in situ crude oil can be found in Figure 4. The consequence of that mass transfer is the formation of a new gaseous phase formed inside the oil phase that leads to crude oil swelling.

The combination of rock–fluid and fluid–fluid interactions could explain the enhanced oil recovery observed when carbonated produced water was used as an imbibition fluid. It is believed that both rock–fluid and fluid–fluid interactions are responsible for the observed oil recovery. The rock–fluid interactions are related to a wettability alteration from oil-wet to water-wet conditions, rock dissolution, and opening of new paths [26,27]. On the other hand, the fluid–fluid interactions can be associated with the mass transfer of CO<sub>2</sub> into the crude oil phase, leading to a better sweep efficiency due to swelling and improved mobility (viscosity reduction) of the crude oil.

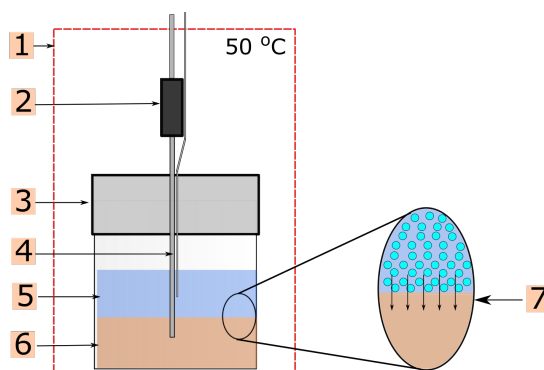

**Figure 4.** Graphical representation of the mass transfer happening during carbonated produced water injection and microcalorimeter description. 1—TAM IV microcalorimeter at 50 °C, 2—titration ampule, 3—reaction vessel, 4—titration shaft, 5—carbonated produced water, 6—crude oil and 7—CO<sub>2</sub> transfer.

The implication of both rock–fluid and fluid–fluid interactions is that CO<sub>2</sub> in the injection fluid (CPW) could be potentially stored in geological formations while recovering crude oil. Several studies in the literature [3,6,25,28] have reported this secondary benefit. Kechut et al. [28] showed that a high percentage of the total CO<sub>2</sub> volume (45–51%) is stored at the end of the secondary and tertiary carbonated waterfloods. According to those authors, the high solubility of CO<sub>2</sub> in the water phase increases the storing capacity in CWI and reduces the risk of buoyancy-driven leakage through micro-pores of the caprock.

#### 4. Conclusions

- Carbonated produced water (CPW) injection increases the oil recovery by 7–11% in comparison to plain produced water (PW).
- The inorganic content (IC) showed that CO<sub>2</sub> dissolved in the production water caused rock dissolution, which was confirmed by an increase in the calcium concentration from 0.87 g/L before the spontaneous imbibition experiment to 1.2 after the experiment.
- The rock–fluid experiments indicate that CPW is more reactive than PW. The obtained heat for the interaction between CPW and chalk+EFB+oil was double the that for the interaction between PW and chalk+EFB+oil.
- The fluid–fluid experiments show that when CPW makes contact with the reservoir fluids (oil+EFB), CO<sub>2</sub> reacts strongly with the reservoir fluids. This effect was not observed for PW.
- Produced water with CO<sub>2</sub> is a promising fluid not only for enhanced oil recovery (EOR) purposes, but also for CO<sub>2</sub> sequestration and storage in oil reservoirs.

**Author Contributions:** J.E.C.: Conceptualization, Investigation, Methodology, Software, Validation, Visualization, Writing—Original Draft. Y.K.: Investigation, Methodology, Experimental Work. I.A.A.: Investigation, Methodology, Experimental Work. E.G.S.: Conceptualization, Validation, Experimental Work, Writing—Review and Editing. All authors have read and agreed to the published version of the manuscript.

**Funding:** The financial assistance to acquire the TAM IV equipment was offered by Fabrikant Mads Clausens Fond and 402 Esbjerg Seminariefond.

**Institutional Review Board Statement:** Not applicable.

**Informed Consent Statement:** Not applicable.

**Data Availability Statement:** The raw coreflooding and microcalorimetry data are available.

**Conflicts of Interest:** The authors declare no conflict of interest.

## References

- Newell, R.; Raimi, D.; Villanueva, S.; Prest, B. *Global Energy Outlook 2020: Energy Transition or Energy Addition?* Technical Report; Resources for the Future: Washington, DC, USA, 2020.
- Cobos, J. Microcalorimetric Evaluation of Wettability Alteration and Geothermal Brine Reinjection. Ph.D. Thesis, Aalborg University, Aalborg, Denmark, 2020.
- Sohrabi, M.; Kechut, N.I.; Riazi, M.; Jamiolahmady, M.; Ireland, S.; Robertson, G. Coreflooding Studies to Investigate the Potential of Carbonated Water Injection as an Injection Strategy for Improved Oil Recovery and CO<sub>2</sub> Storage. *Transp. Porous Media* **2011**, *91*, 101–121. [\[CrossRef\]](#)
- Seyyedi, M.; Mahzari, P.; Sohrabi, M. A comparative study of oil compositional variations during CO<sub>2</sub> and carbonated water injection scenarios for EOR. *J. Pet. Sci. Eng.* **2018**, *164*, 685–695. [\[CrossRef\]](#)
- Esene, C.; Rezaei, N.; Aborig, A.; Zendehboudi, S. Comprehensive review of carbonated water injection for enhanced oil recovery. *Fuel* **2019**, *237*, 1086–1107. [\[CrossRef\]](#)
- Motie, M.; Assareh, M. CO<sub>2</sub> sequestration using carbonated water injection in depleted naturally fractured reservoirs: A simulation study. *Int. J. Greenh. Gas Control* **2020**, *93*, 102893. [\[CrossRef\]](#)
- Shu, G.; Dong, M.; Chen, S.; Luo, P. Improvement of CO<sub>2</sub> EOR performance in water-wet Reservoirs by Adding active carbonated water. *J. Pet. Sci. Eng.* **2014**, *121*. [\[CrossRef\]](#)
- Fernø, M.A.; Eide, O.; Steinsbø, M.; Langlo, S.A.W.; Christophersen, A.; Skibenes, A.; Ydstebø, T.; Graue, A. Mobility control during CO<sub>2</sub> EOR in fractured carbonates using foam: Laboratory evaluation and numerical simulations. *J. Pet. Sci. Eng.* **2015**, *135*, 442. [\[CrossRef\]](#)
- Bisweswar, G.; Al-Hamairi, A.; Jin, S. Carbonated water injection: An efficient EOR approach. A review of fundamentals and prospects. *J. Pet. Explor. Prod. Technol.* **2019**, *10*, 673–685. [\[CrossRef\]](#)
- Xu, Z.X.; Li, S.Y.; Li, B.F.; Chen, D.Q.; Liu, Z.Y.; Li, Z.M. A review of development methods and EOR technologies for carbonate reservoirs. *Pet. Sci.* **2020**, *17*, 990–1013. [\[CrossRef\]](#)
- Chen, Y.; Sari, A.; Xie, Q.; Brady, P.V.; Hossain, M.M.; Saeedi, A. Electrostatic Origins of CO<sub>2</sub>-Increased Hydrophilicity in Carbonate Reservoirs. *Sci. Rep.* **2018**, *8*, 17691. [\[CrossRef\]](#)
- Salim, N.N.; Feig, A. Isothermal Titration Calorimetry of RNA. *Methods* **2009**, *47*, 198–205. [\[CrossRef\]](#)
- Cobos, J.E.; Sogaard, E.G. Effect of individual ions on rock-brine-oil interactions: A microcalorimetric approach. *Fuel* **2021**, *290*, 119955. [\[CrossRef\]](#)
- Cobos, J.E.; Sogaard, E.G. Study of geothermal brine reinjection by microcalorimetry and core flooding experiments. *Geothermics* **2020**, *87*, 101863. [\[CrossRef\]](#)
- Huang, Y.; Keller, A.A. Isothermal titration microcalorimetry to determine the thermodynamics of metal ion removal by magnetic nanoparticle sorbents. *Environ. Sci. Nano* **2016**, *3*, 1206–1214. [\[CrossRef\]](#)
- Cobos, J.E.; Westh, P.; Sogaard, E.G. Isothermal Titration Calorimetry Study of Brine Oil Rock Interactions. *Energy Fuels* **2018**, *32*, 7338–7346. [\[CrossRef\]](#)
- Cobos, J.E.; Sogaard, E.G. Impact of Compositional Differences in Chalk and Water Content on Advanced Water Flooding: A Microcalorimetric Assessment. *Energy Fuels* **2020**, *34*, 12291–12300. [\[CrossRef\]](#)
- Cobos, J.E.; Sandnes, M.; Steinsbø, M.; Brattekkås, B.; Sogaard, E.G.; Graue, A. Evaluation of wettability alteration in heterogeneous limestone at microscopic and macroscopic levels. *J. Pet. Sci. Eng.* **2021**, *202*, 108534. [\[CrossRef\]](#)
- Standnes, D.C.; Austad, T. Wettability alteration in chalk: 1. Preparation of core material and oil properties. *J. Pet. Sci. Eng.* **2000**, *28*, 111–121. [\[CrossRef\]](#)
- Engineering ToolBox. Solubility of Carbon Dioxide (CO<sub>2</sub>) in Water. 2008. Available online: [https://www.engineeringtoolbox.com/gases-solubility-water-d\\_1148.html](https://www.engineeringtoolbox.com/gases-solubility-water-d_1148.html) (accessed on 16 November 2021).
- Kilybay, A.; Ghosh, B.; Thomas, N.C.; Sulemana, N.T. Hybrid EOR Technology: Carbonated Water-Smart Water Flood Improved Recovery in Oil Wet Carbonate Formation: Part-II. In Proceedings of the SPE Oil and Gas India Conference and Exhibition, Mumbai, India, 4–6 April 2017; p. 10. [\[CrossRef\]](#)
- Seyyedi, M.; Sohrabi, M.; Sisson, A.; Ireland, S. Quantification of oil recovery efficiency, CO<sub>2</sub> storage potential, and fluid-rock interactions by CWI in heterogeneous sandstone oil reservoirs. *J. Mol. Liq.* **2018**, *249*, 779–788. [\[CrossRef\]](#)
- Zou, J.; Liao, X.; Li, X.; Zhu, Z.; Chu, H.; Yuan, Z.; Luo, W.; Shen, X. An Experimental Study on Carbonated Water Injection of Core Samples from Tight Oil Reservoirs from Ordos Basin. In Proceedings of the SPE Russian Petroleum Technology Conference, Moscow, Russia, 15–17 October 2018; p. 10. [\[CrossRef\]](#)
- Riazi, M. Pore Scale Mechanisms of Carbonated Water Injection in Oil Reservoirs. Ph.D. Thesis, Heriot-Watt University, Putrajaya, Malaysia, 2011.
- Foroozesh, J.; Jamiolahmady, M.; Sohrabi, M. Mathematical modeling of carbonated water injection for EOR and CO<sub>2</sub> storage with a focus on mass transfer kinetics. *Fuel* **2016**, *174*, 325–332. [\[CrossRef\]](#)
- Shakiba, M.; Ayatollahi, S.; Riazi, M. Investigation of oil recovery and CO<sub>2</sub> storage during secondary and tertiary injection of carbonated water in an Iranian carbonate oil reservoir. *J. Pet. Sci. Eng.* **2016**, *137*, 134–143. [\[CrossRef\]](#)

- 
27. Mosavat, N.; Torabi, F. Micro-optical analysis of carbonated water injection in irregular and heterogeneous pore geometry. *Fuel* **2016**, *175*, 191–201. [[CrossRef](#)]
  28. Kechut, N.I.; Jamiolahmady, M.; Sohrabi, M. Numerical simulation of experimental carbonated water injection (CWI) for improved oil recovery and CO<sub>2</sub> storage. *J. Pet. Sci. Eng.* **2011**, *77*, 111–120. [[CrossRef](#)]