

Data report on Rørdal chalk

Nielsen, Søren Dam; Peri, Elena; Nielsen, Benjamin Nordahl

Publication date:
2018

Document Version
Publisher's PDF, also known as Version of record

[Link to publication from Aalborg University](#)

Citation for published version (APA):

Nielsen, S. D., Peri, E., & Nielsen, B. N. (2018). *Data report on Rørdal chalk*. (1 ed.) Aalborg Universitet, Institut for Byggeri og Anlæg. DCE Technical reports No. 257

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

Take down policy

If you believe that this document breaches copyright please contact us at vbn@aub.aau.dk providing details, and we will remove access to the work immediately and investigate your claim.



DEPARTMENT OF CIVIL ENGINEERING
AALBORG UNIVERSITY

Data report on Rørdal Chalk

**Søren Dam Nielsen
Elena Peri
Benjamin Nordahl Nielsen**

Aalborg University
Department of Civil Engineering
Division of Structures, Materials and Geotechnics

DCE Technical Report No. 257

Data report on Rørdal Chalk

by

Søren Dam Nielsen
Elena Peri
Benjamin Nordahl Nielsen

Month 2018

© Aalborg University

Scientific Publications at the Department of Civil Engineering

Technical Reports are published for timely dissemination of research results and scientific work carried out at the Department of Civil Engineering (DCE) at Aalborg University. This medium allows publication of more detailed explanations and results than typically allowed in scientific journals.

Technical Memoranda are produced to enable the preliminary dissemination of scientific work by the personnel of the DCE where such release is deemed to be appropriate. Documents of this kind may be incomplete or temporary versions of papers—or part of continuing work. This should be kept in mind when references are given to publications of this kind.

Contract Reports are produced to report scientific work carried out under contract. Publications of this kind contain confidential matter and are reserved for the sponsors and the DCE. Therefore, Contract Reports are generally not available for public circulation.

Lecture Notes contain material produced by the lecturers at the DCE for educational purposes. This may be scientific notes, lecture books, example problems or manuals for laboratory work, or computer programs developed at the DCE.

Theses are monographs or collections of papers published to report the scientific work carried out at the DCE to obtain a degree as either PhD or Doctor of Technology. The thesis is publicly available after the defence of the degree.

Latest News is published to enable rapid communication of information about scientific work carried out at the DCE. This includes the status of research projects, developments in the laboratories, information about collaborative work and recent research results.

Published 2018 by
Aalborg University
Department of Civil Engineering
Thomas Manns Vej 23
DK-9220 Aalborg Ø, Denmark

Printed in Aalborg at Aalborg University

ISSN 1901-726X
DCE Technical Report No. 257

Recent publications in the DCE Technical Report Series

Table of Content

Description of sample collection	9
Collection from Rørdal	9
Performed tests	10
Test Numbering	10
Classification	11
Resume	11
Water Content	11
Total Density	11
Specific Gravity	11
Void Ratio	12
Porosity	12
Unit weight	12
Dry density	12
Oedometer tests	13
Unconfined compression tests	16
Acknowledgement	19
Appendix	20
Test 1704CON0903 – Load steps	20
Test 1704CON1001 – Load steps	29
Test 1704CON1103 – Load steps	39
Test 1704CON1201 – Load steps	48

Description of sample collection

Collection from Rørdal

The tested material is chalk and has been collected from Aalborg Portlands chalk quarry in Rørdal the 4th of December 2017. The material was excavated during the night between the 3rd and 4th of December and 12 blocks of chalk were taken from the surface in the morning. The material was not exposed to sun and no mist was observed. For each block of chalk a sample for water content was taken before the remaining material were sealed in a plastic bag. The figures below show the environment where the samples has been collected. The 12 blocks were then sealed in plastic bags and stored at a constant temperature of 7°C.



Performed tests

This data report presents results from the following geotechnical tests:

- Classification Tests (CLA)
- Oedometer Tests (CON)
- Unconfined Compression Tests (UCT)

Test Numbering

Oedometer tests, Unconfined Compression Tests and Triaxial Tests are given a four-digit test no. The tests number consist of xxyy, where xx refers to the block sample it originated from and yy which is a consecutive number of tests on that specific block sample.

Classification

Resume

Parameter	symbol	value	Unit
Water content	w	28	%
Total density	ρ_t	2.11	Mg/m ³
Specific gravity	G_s	2.7	-
Void ratio	e	0.84	-
Porosity	n	46	%
Unit weight (in-situ)	γ	20.7	kN/m ³
Dry density	ρ_d	1.65	Mg/m ³

Water Content

The water content of the chalk I calculated as

$$w = \frac{m_w}{m_s}$$

m_w is the mass of water and m_s is the mass of the solids (the soil grains). The material for water content of each block sample were taken on location, and must be very similar to the in-situ water content. The water contents are presented below, resulting in a mean water content of 28%.

Block sample	01	02	03	04	05	06	07	08	09	10	11	12
Water content [%]	29	32	21	24	30	32	25	29	28	25	27	31

Test no.	Natural water content	Water content after testing
0101	29%	29%
0102	29%	29%
0103	29%	31%
0104	29%	28%
0901	28%	31%
0902	28%	32%
1101	27%	28%
1102	27%	31%
0903	28%	-
1001	25%	-
1103	27%	-
1201	31%	-

Total Density

The total density is calculated as

$$\rho_t = \frac{m_t}{V_t}$$

where m_t is the total sample (soil and water) mass and V_t is the total volume of the sample (voids and solids).

Specific Gravity

The specific gravity is calculated as

$$G_s = \frac{\gamma_s}{\gamma_0}$$

where γ_s is the unit weight of the solid part (soil grain) and γ_0 is the unit weight of pure (demineralized) water at 4°C.

Void Ratio

The void ratio is calculated as

$$e = \frac{G_s \rho_w}{\rho_d} - 1$$

where V_v is the volume of voids and V_s is the volume of solids.

Porosity

The porosity is calculated as

$$n = \frac{e}{1 + e}$$

where e is the void ratio.

Unit weight

The unit weight of the chalk is calculated as

$$\gamma = \frac{m_t g}{V_t}$$

where m_t is the total mass, V_t is the total volume and g is the acceleration of gravity. The presented unit weights have been measured on samples from Block sample No. 3 on samples with masses of 200-500g.

Test 1	Test 2	Test 3	Test 4	Test 5	Test 6	Mean
21.18	20.42	20.86	20.49	20.38	20.81	20.7

Dry density

The dry density of the chalk is calculated as

$$\rho_d = \frac{\rho_t}{1 + w}$$

where m_d is the dry mass and V_t is the total volume.

Oedometer tests


The oedometer tests presented in the data report are all conducted as incremental loaded oedometer tests. Each load step had a duration of 7 days.


The strains adopted are the so-called natural strains, defined as:

$$\varepsilon = \ln\left(\frac{H_0}{H_0 - u_1}\right)$$

Where, H_0 is the initial height of the sample and u_1 is the deformation achieved at each load step.

Test No.	Sample height, H	Sample Diameter, D
0101	35mm	70mm
0102	35mm	70mm
0103	35mm	70mm
0104	35mm	70mm
0901	35mm	70mm
0902	35mm	70mm
0903	20mm	35mm
1001	35mm	35mm
1101	35mm	70mm
1102	35mm	70mm
1103	20mm	35mm
1201	35mm	35mm

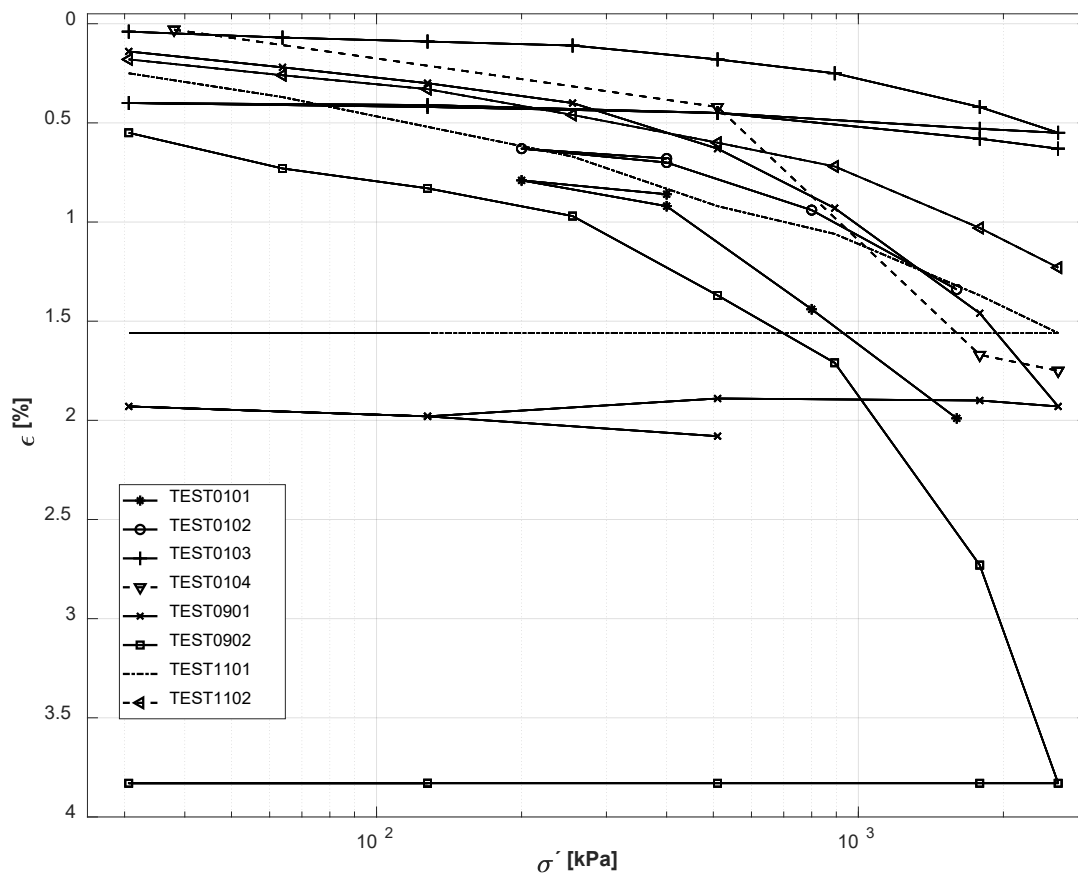

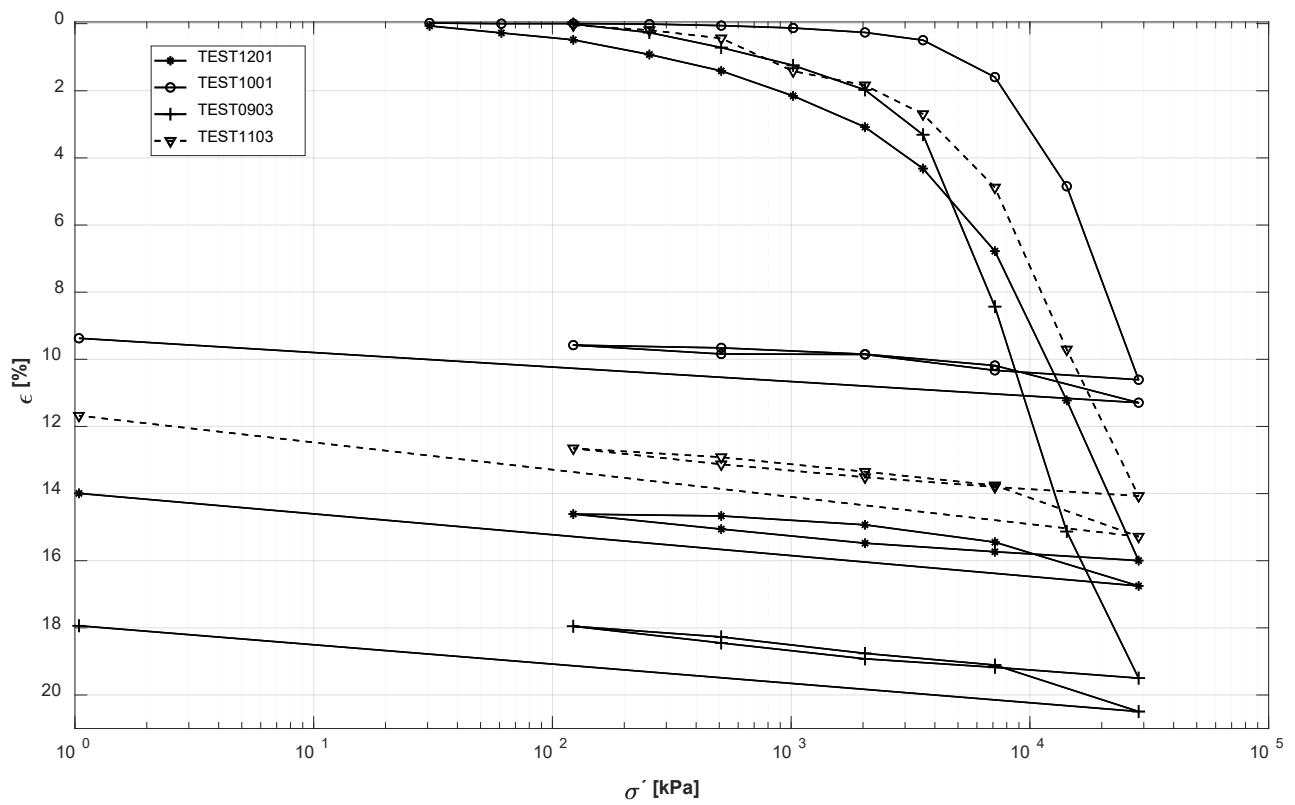

1704CON0101		1704CON0102		1704CON0103		1704CON0104	
ϵ_{tot} [%]	σ [kPa]	ϵ_{tot} [%]	σ [kPa]	ϵ_{tot} [%]	σ [kPa]	ϵ_{tot} [%]	σ [kPa]
0.86	400	0.68	400	0.04	30.6	0.03	38
0.79	200	0.63	200	0.07	63.8	0.42	510
0.92	400	0.70	400	0.09	127.6	1.67	1786
1.44	800	0.94	800	0.11	255.2	1.75	2598
1.99	1600	1.34	1600	0.18	510.3		
				0.25	893.1		
				0.42	1786		
				0.55	2598.4		
				0.53	1786.2		
				0.45	510.3		
				0.42	127.6		
				0.40	30.6		
				0.41	127.6		
				0.45	510.3		
				0.58	1786.2		
				0.63	2595.4		


1704CON0901		1704CON0902		1704CON1101		1704CON1102	
ϵ_{tot} [%]	σ [kPa]	ϵ_{tot} [%]	σ [kPa]	ϵ_{tot} [%]	σ [kPa]	ϵ_{tot} [%]	σ [kPa]
0.14	30.6	0.55	30.6	0.25	30.6	0.18	30.6
0.22	63.8	0.73	63.8	0.37	63.8	0.26	63.8
0.3	127.6	0.83	127.6	0.52	127.6	0.33	127.6
0.4	255.2	0.97	255.2	0.67	255.2	0.46	255.2
0.63	510.3	1.37	510.3	0.92	510.3	0.6	510.3
0.93	893.1	1.71	893.1	1.06	893.1	0.72	893.1
1.46	1786.2	2.73	1786.2	1.37	1786.2	1.03	1786.2
1.93	2598.4	3.83	2598.4	1.56	2598.4	1.23	2598.4
1.9	1786.2	3.83	1786.2	1.56	1786.2		
1.89	510.3	3.83	510.3	1.56	510.3		
1.98	127.6	3.83	127.6	1.56	127.6		
1.93	30.6	3.83	30.6	1.56	30.7		
1.98	127.6	3.83	127.6	1.56	127.6		
2.08	510.3						

1704CON0903		1704CON1001		1704CON1103		1704CON1201	
ϵ_{tot} [%]	σ [kPa]	ϵ_{tot} [%]	σ [kPa]	ϵ_{tot} [%]	σ [kPa]	ϵ_{tot} [%]	σ [kPa]
0.01	122	0	31	0.05	122	0.07	31
0.27	255	0	61	0.19	255	0.28	61
0.71	510	-0.78	122	0.44	510	0.48	122
1.24	1019	-0.77	255	1.42	1019	0.92	255
1.97	2039	-0.72	510	1.84	2039	1.41	510
3.31	3567	-0.65	1019	2.70	3567	2.15	1019
8.43	7135	-0.52	2039	4.88	7135	3.08	2039
15.13	14270	-0.29	3567	9.71	14270	4.32	3567
19.50	28540	0.81	7135	14.07	28540	6.78	7135
19.18	7135	4.06	14270	13.81	7135	11.22	14270
18.92	2039	9.83	28540	13.51	2039	16.00	28540
18.45	510	9.55	7135	13.13	510	15.73	7135
17.95	122	9.08	2039	12.65	122	15.48	2039
18.27	510	9.06	510	12.91	510	15.06	510
18.76	2039	8.80	122	13.35	2039	14.61	122
19.11	7135	8.88	510	13.76	7135	14.67	510
20.49	28540	9.07	2039	15.28	28540	14.93	2039
17.94	0	9.40	7135	11.68	0	15.45	7135
		10.51	28540			16.75	28540
		8.59	0			13.99	0

Unconfined compression tests

Three unconfined compression tests were conducted according to STANDARD. The dimensions and mass are presented below. The tests were performed with a strain rate of 0.8-0.9%/min.


Test No	Height	Cross section	Mass
0301	122mm	71.5mm×70.0mm	1271.2g
0302	123mm	63mm×62mm	993.2g
0303	81mm	45mm×45mm	339.7g

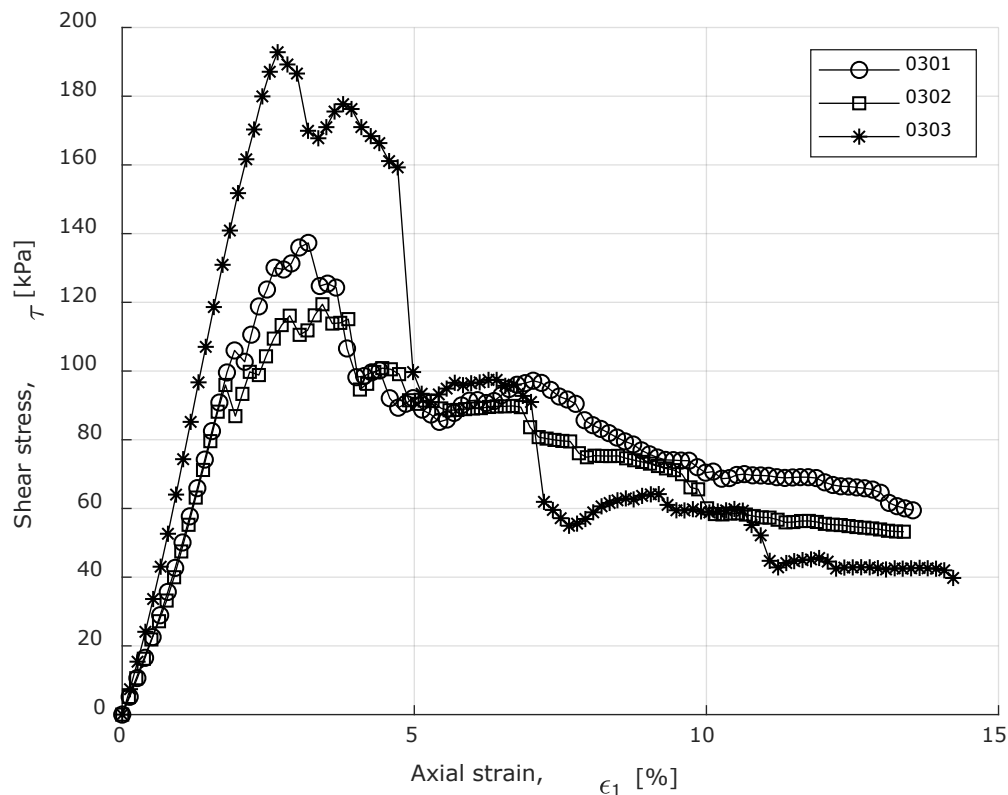

Test No	Peak shear strength [kPa]	Peak shear strain [%]	Water content after test w_f [%]
0301	137	3.4	21%
0302	119	3.2	21%
0303	193	2.7	22%

1704UCT0301			1704UCT0302			1704UCT0303		
t [s]	ϵ_{tot} [%]	σ [kPa]	t [s]	ϵ_{tot} [%]	σ [kPa]	t [s]	ϵ_{tot} [%]	σ [kPa]
1	0.00	0.0	1	0.00	0.0	1	0.00	0.0
2	0.13	10.4	2	0.11	10.3	2	0.13	14.8
3	0.26	21.3	3	0.24	21.2	3	0.26	30.8
4	0.39	33.1	4	0.37	32.5	4	0.40	48.2
5	0.52	45.1	5	0.50	43.7	5	0.53	67.3
6	0.65	57.8	6	0.63	54.4	6	0.66	86.1
7	0.78	71.4	7	0.76	66.4	7	0.78	105.3
8	0.91	85.4	8	0.89	80.0	8	0.92	128.1
9	1.03	100.2	9	1.01	95.0	9	1.04	148.7
10	1.16	115.4	10	1.14	110.5	10	1.17	170.4
11	1.29	131.8	11	1.26	126.3	11	1.31	193.4
12	1.41	148.5	12	1.38	142.4	12	1.43	214.1
13	1.54	165.0	13	1.51	159.2	13	1.57	237.3
14	1.66	181.7	14	1.63	176.3	14	1.72	261.8
15	1.79	199.2	15	1.77	191.9	15	1.84	281.8
16	1.92	212.0	16	1.94	173.8	16	1.98	303.6
17	2.10	205.4	17	2.06	186.7	17	2.12	323.3
18	2.21	221.2	18	2.18	199.5	18	2.26	340.6
19	2.34	237.6	19	2.34	197.7	19	2.40	359.9
20	2.48	247.5	20	2.46	208.6	20	2.53	374.2
21	2.61	260.2	21	2.59	218.9	21	2.66	385.6
22	2.76	259.1	22	2.73	226.8	22	2.83	378.5
23	2.90	262.7	23	2.87	232.2	23	2.99	373.2
24	3.03	271.9	24	3.04	221.1	24	3.18	339.9
25	3.19	274.6	25	3.17	223.7	25	3.36	335.5
26	3.38	249.5	26	3.30	232.4	26	3.49	342.0
27	3.52	250.9	27	3.43	238.9	27	3.63	351.1
28	3.66	248.6	28	3.60	227.6	28	3.78	355.4
29	3.85	213.1	29	3.73	228.1	29	3.93	352.6
30	4.01	196.4	30	3.87	230.2	30	4.09	342.0
31	4.14	197.1	31	4.07	189.2	31	4.25	336.8
32	4.27	199.3	32	4.19	192.6	32	4.40	332.7
33	4.41	200.3	33	4.32	199.5	33	4.57	322.2
34	4.58	184.2	34	4.45	201.7	34	4.72	318.6
35	4.72	178.6	35	4.60	201.0	35	4.98	199.4
36	4.85	181.0	36	4.74	198.2	36	5.13	186.8
37	4.98	184.2	37	4.91	183.0	37	5.28	181.9
38	5.13	177.5	38	5.05	180.9	38	5.42	186.4

The pictures below is taken before, during and after performing the unconfined compression test.

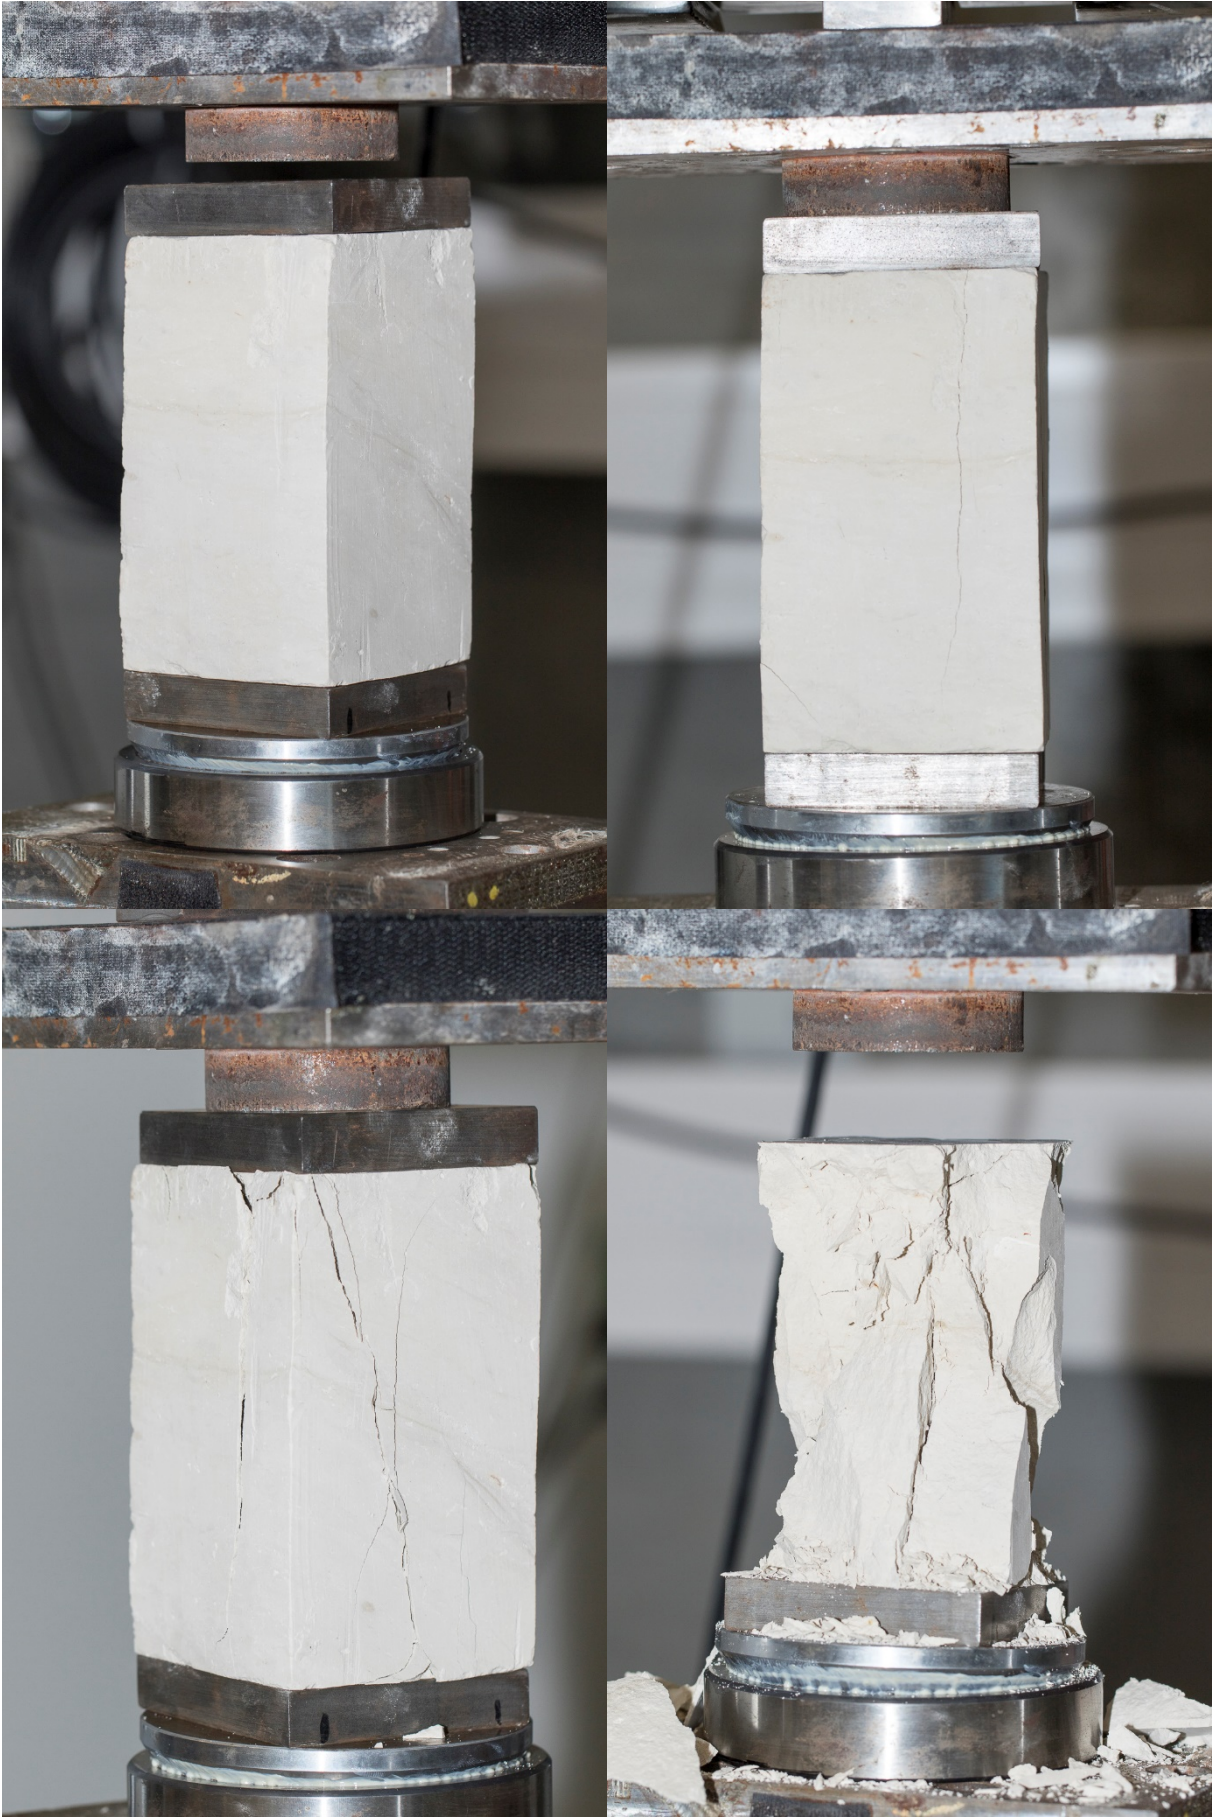

Acknowledgement


The authors would like to acknowledge Aalborg Portland A/S for providing the tested material.

Appendix


Test 1704CON0903 – Load steps

The results of each load step of Test 1704CON0903 is shown in a $\sqrt{t}$ [min] - ε [%] graph.


- Phase 1 – $\sigma' = 122$ kPa

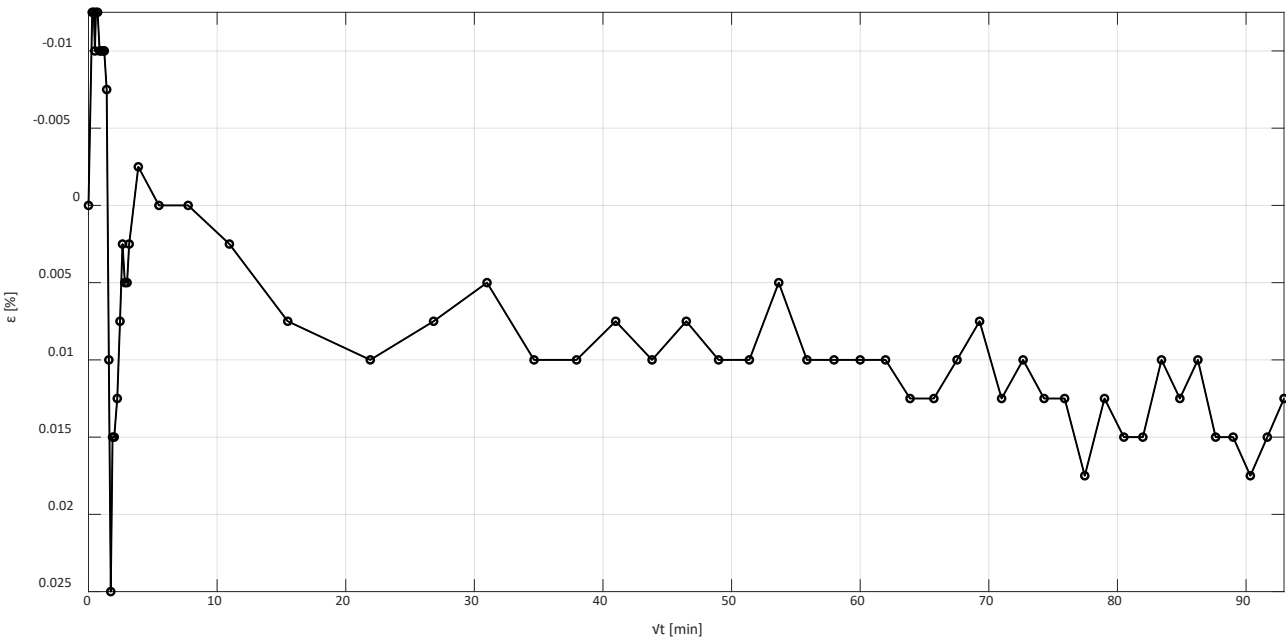


- Phase 2 – $\sigma' = 255$ kPa

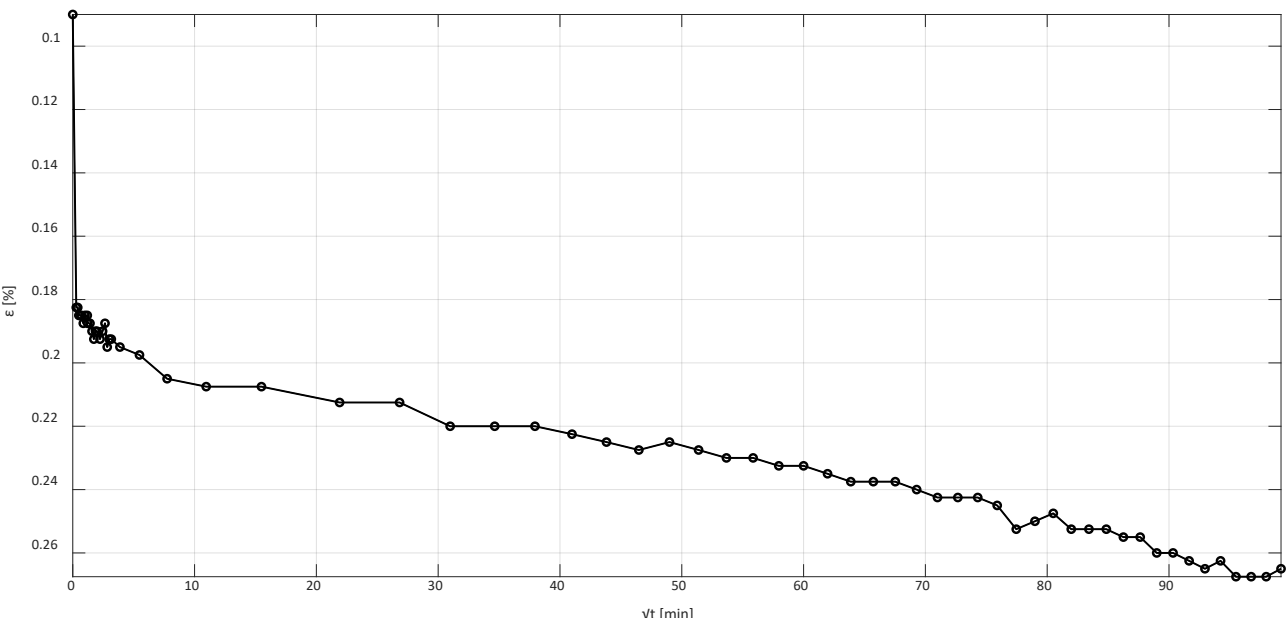


- Phase 3 – $\sigma' = 510$ kPa

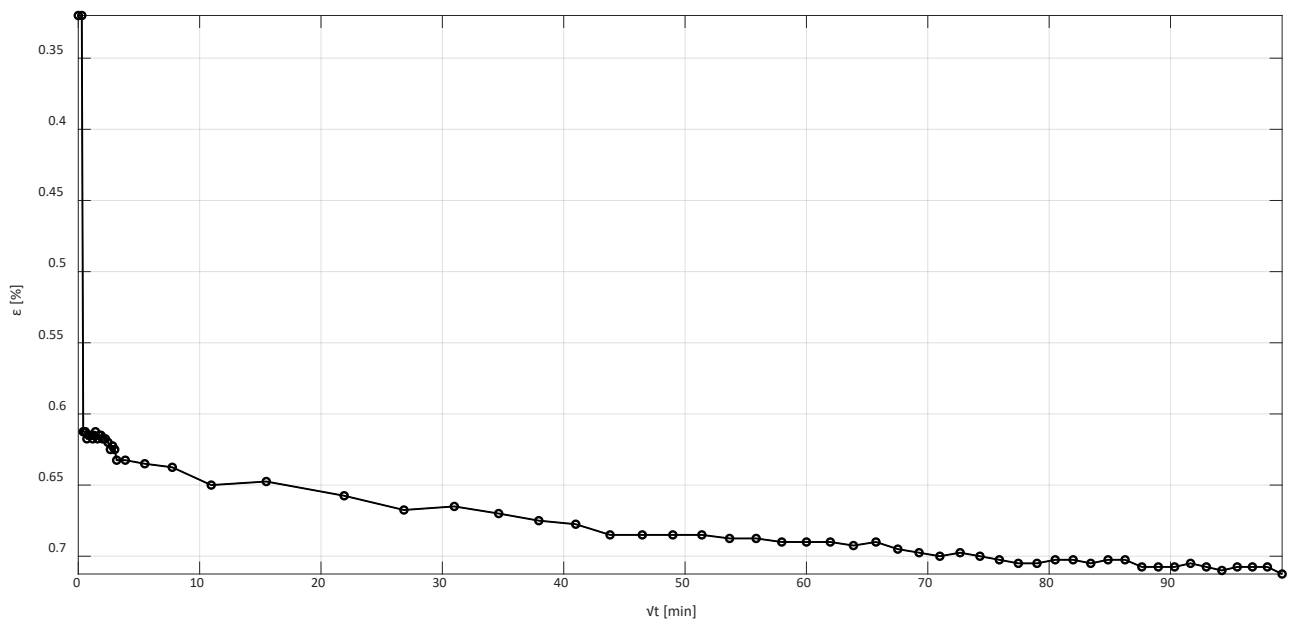


- Phase 4 – $\sigma' = 1019$ kPa

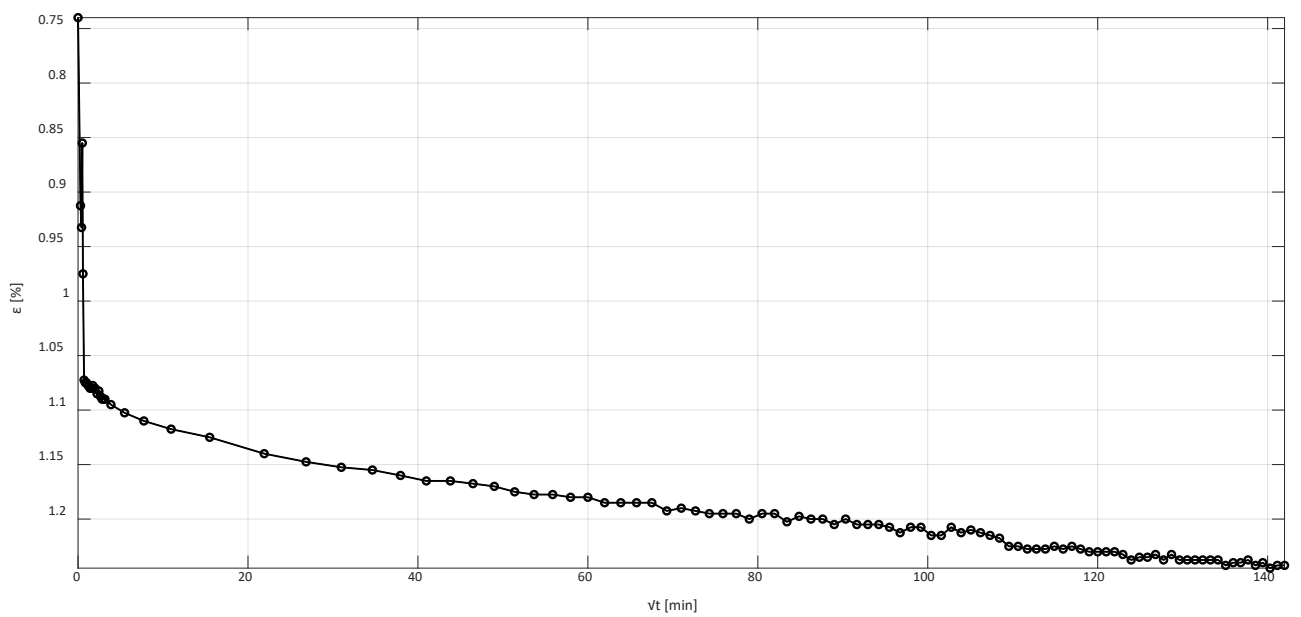


- Phase 5 – $\sigma' = 2039$ kPa

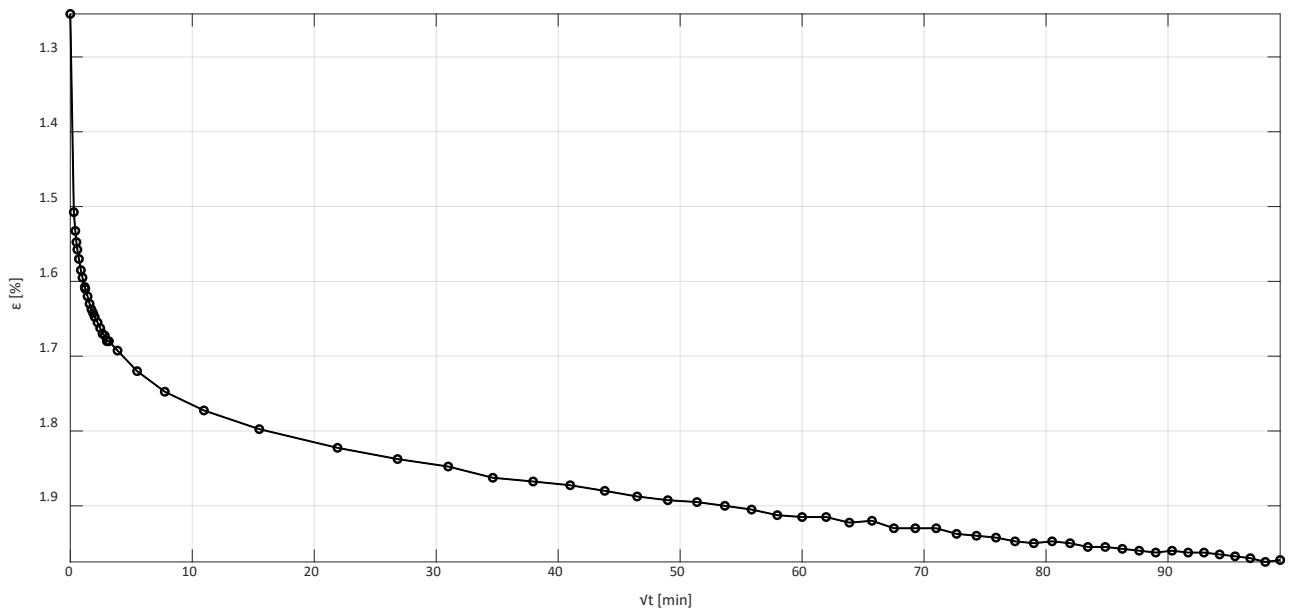


- Phase 6 – $\sigma' = 3567$ kPa

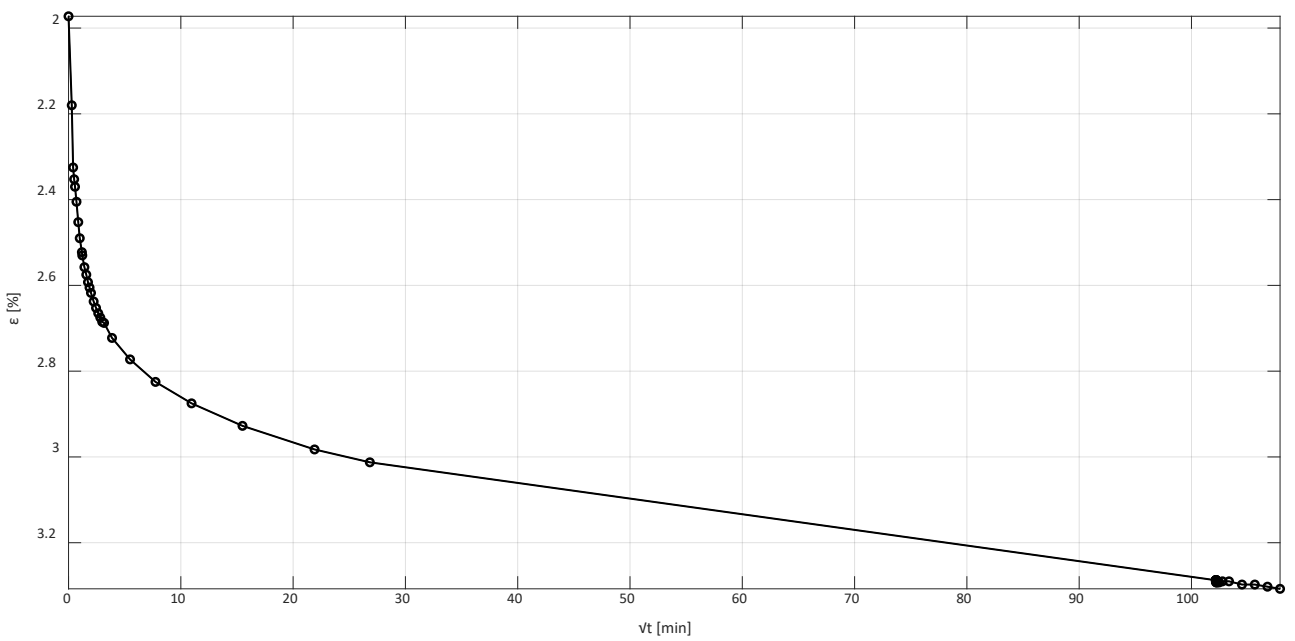


- Phase 7 – $\sigma' = 7135$ kPa

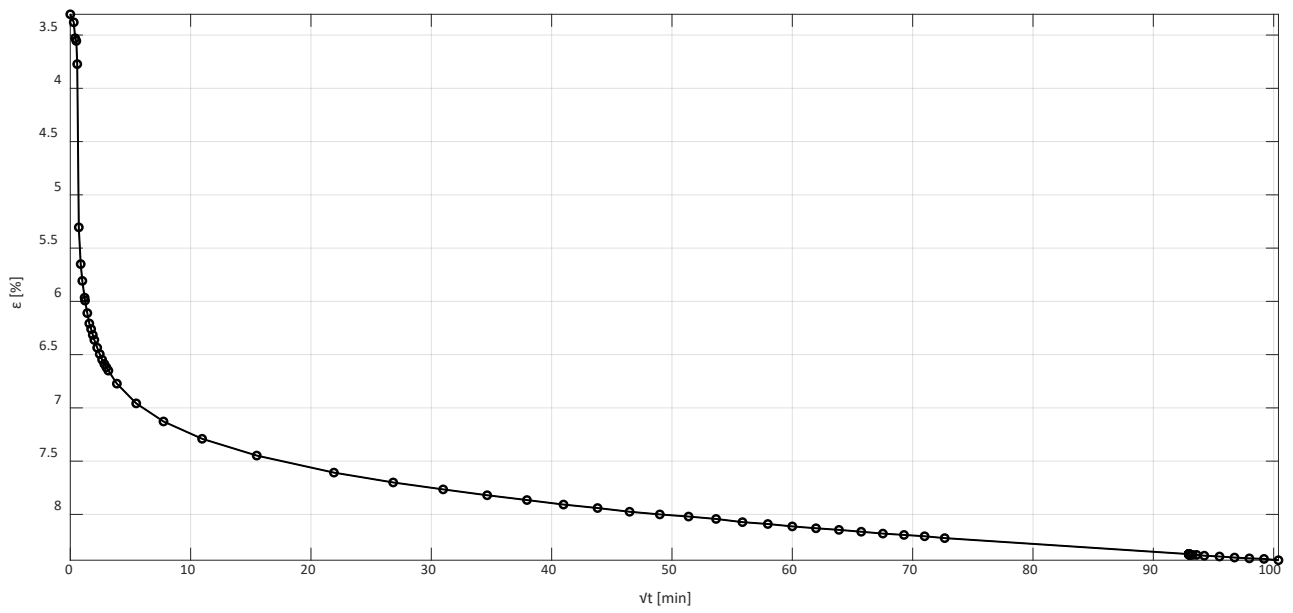


- Phase 8 – $\sigma' = 14270$ kPa

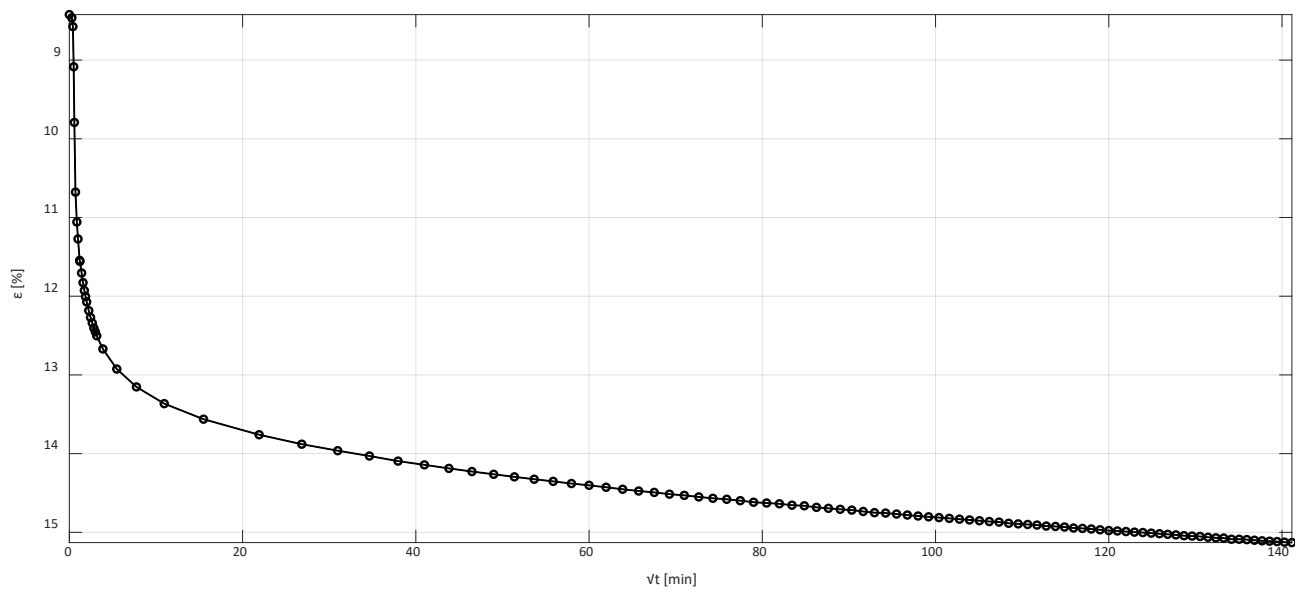


- Phase 9 – $\sigma' = 28540$ kPa

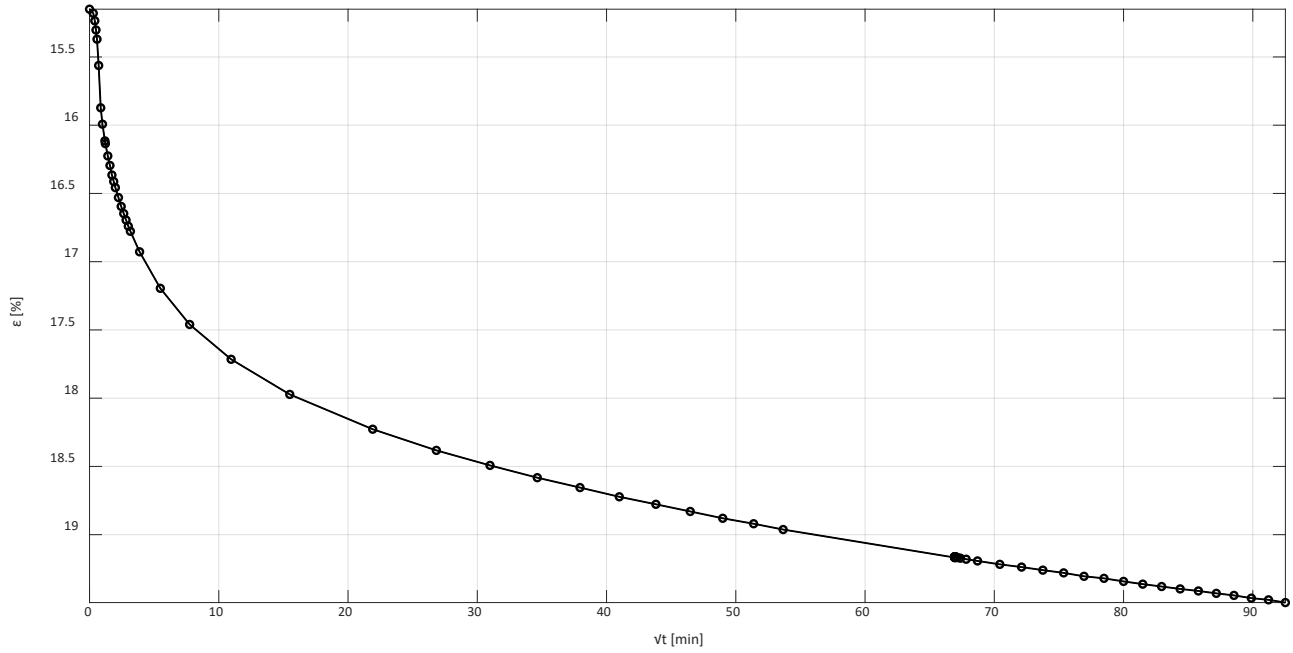


- Phase 10 – $\sigma' = 7135$ kPa

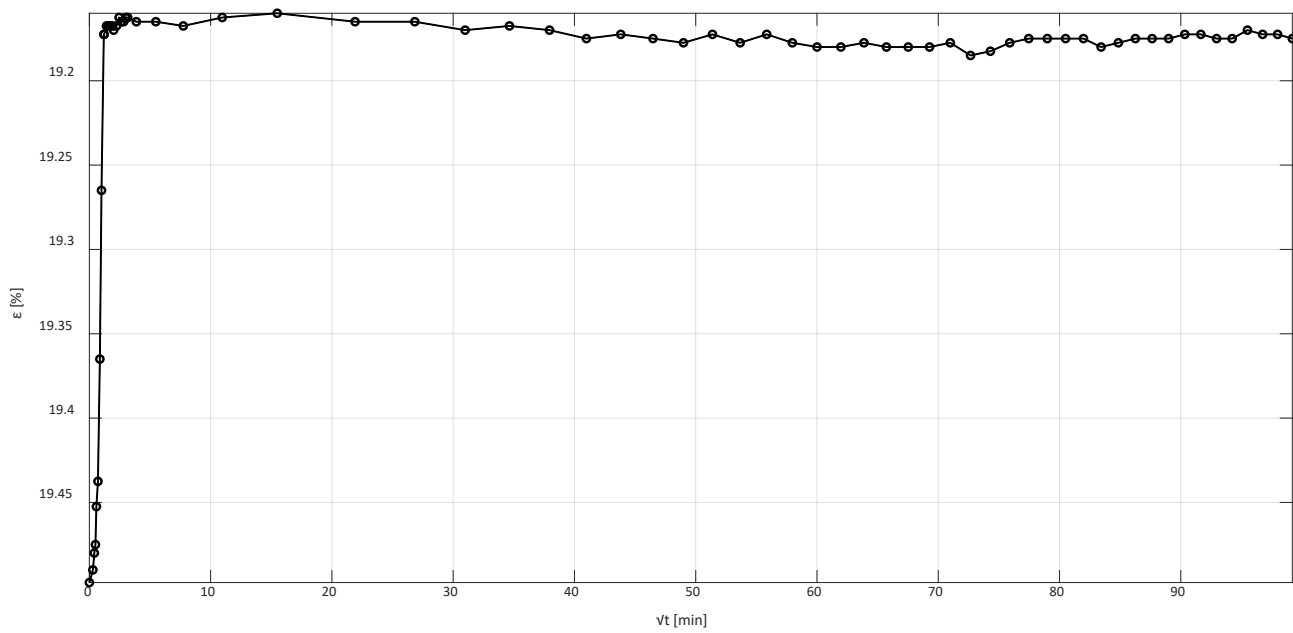


- Phase 11 – $\sigma' = 2039$ kPa

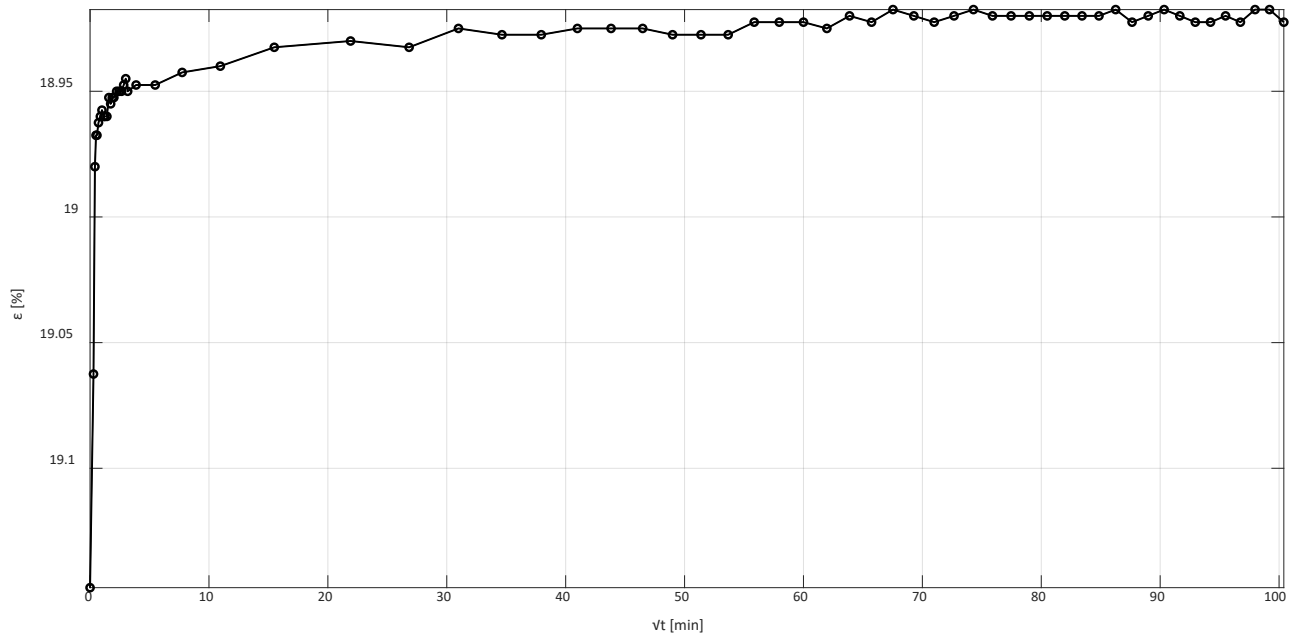


- Phase 12 – $\sigma' = 510$ kPa

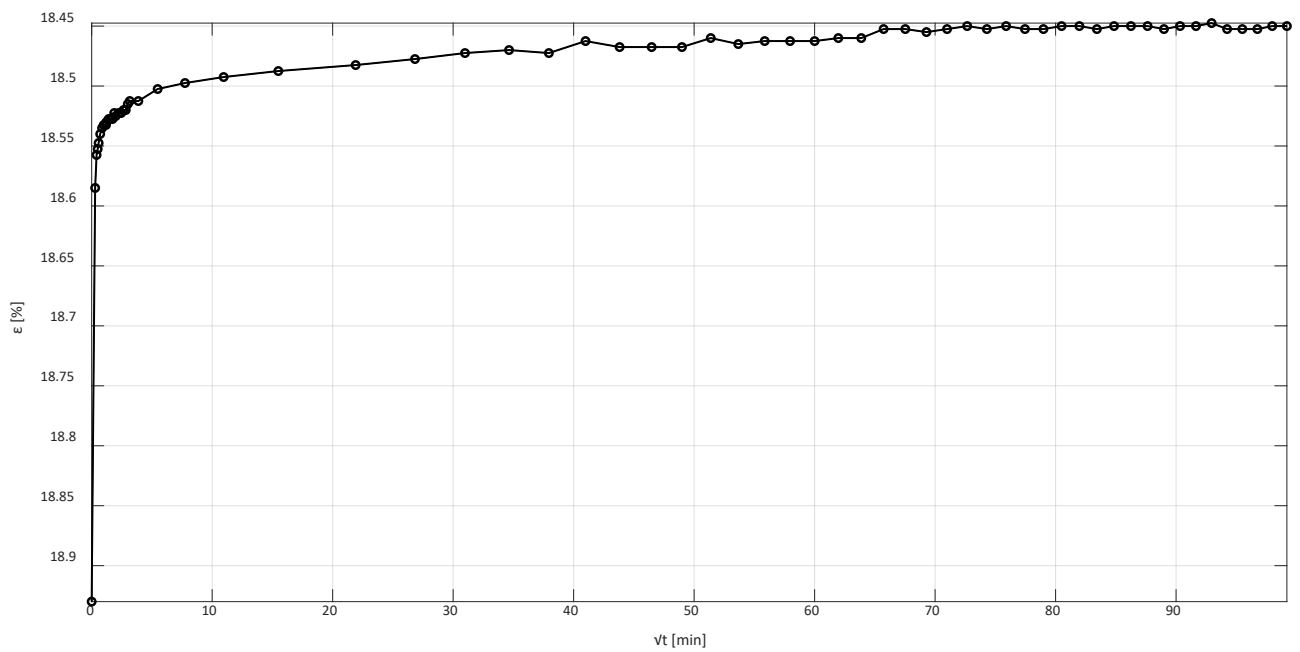


- Phase 13 – $\sigma' = 122 \text{ kPa}$

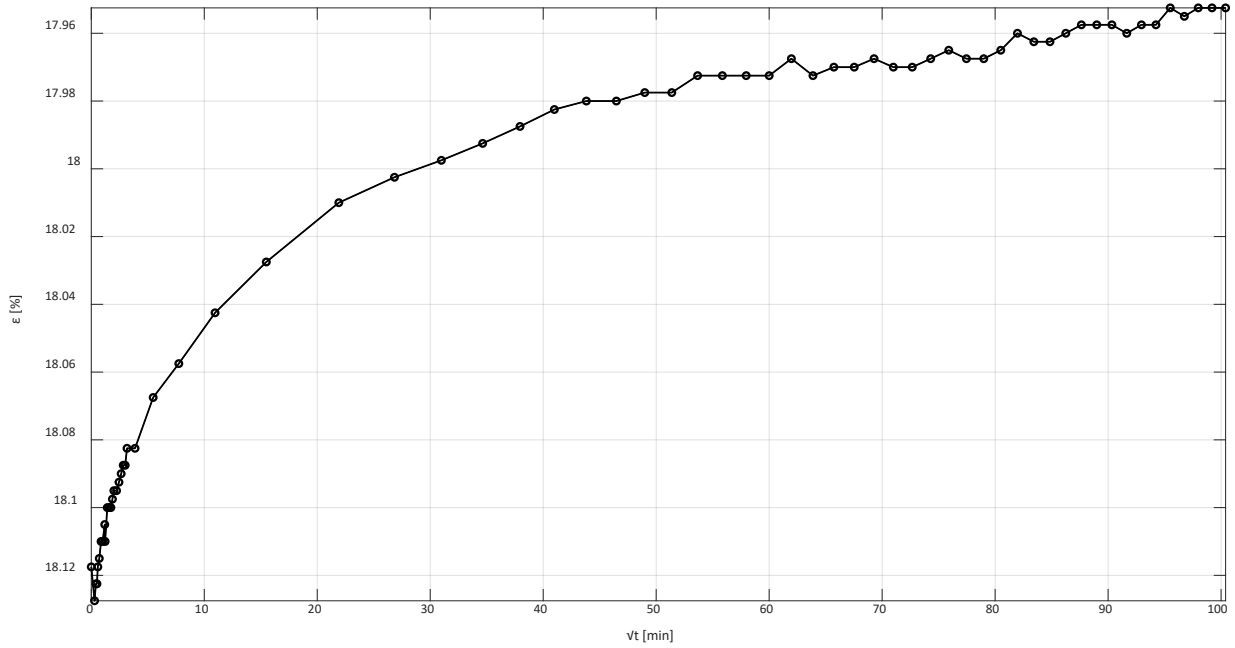


- Phase 14 – $\sigma' = 510 \text{ kPa}$

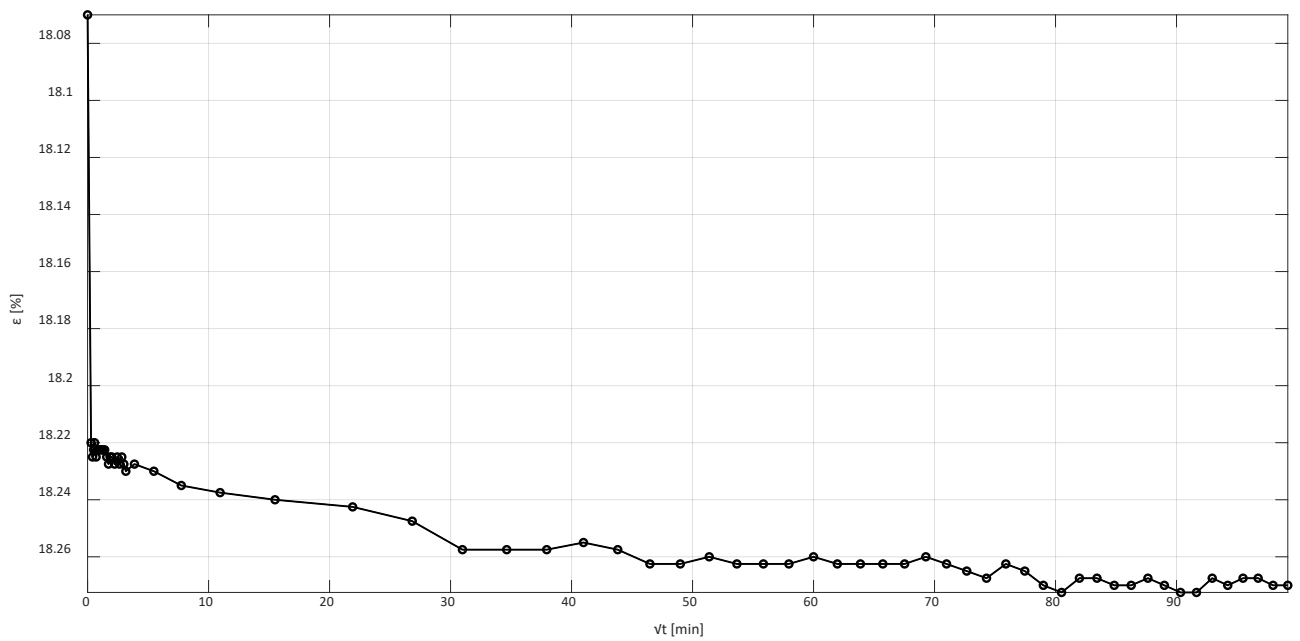


- Phase 15 – $\sigma' = 2039$ kPa

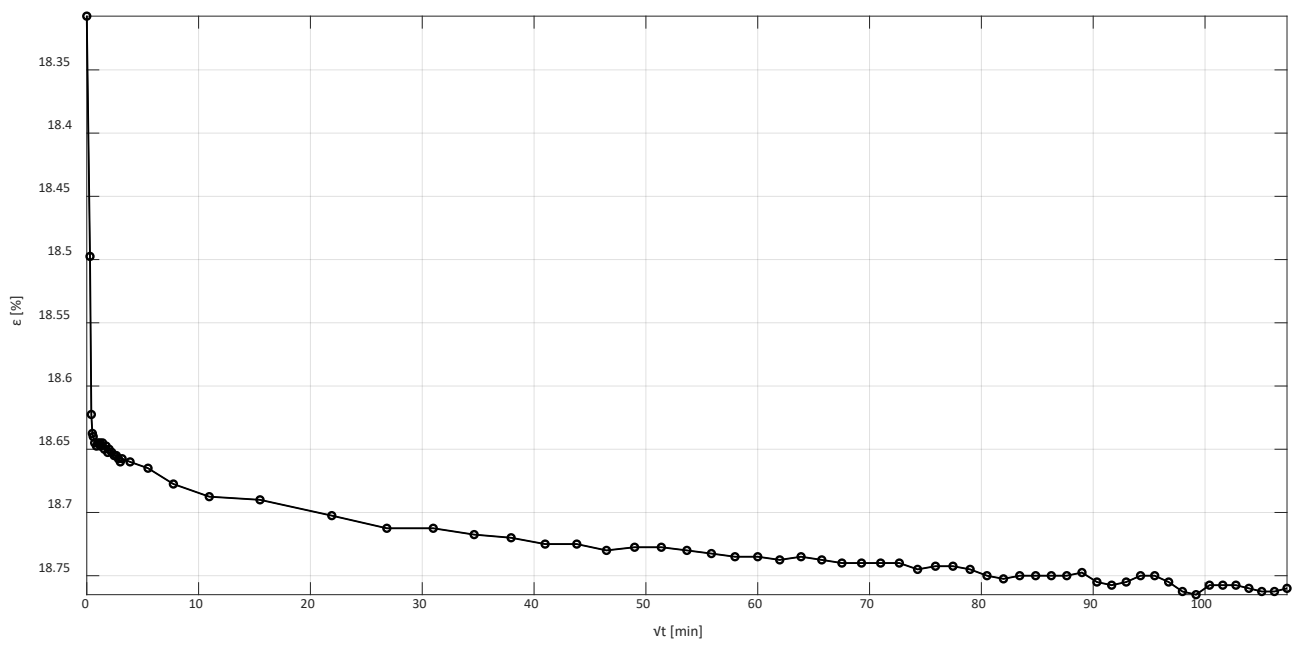


- Phase 16 – $\sigma' = 7135$ kPa

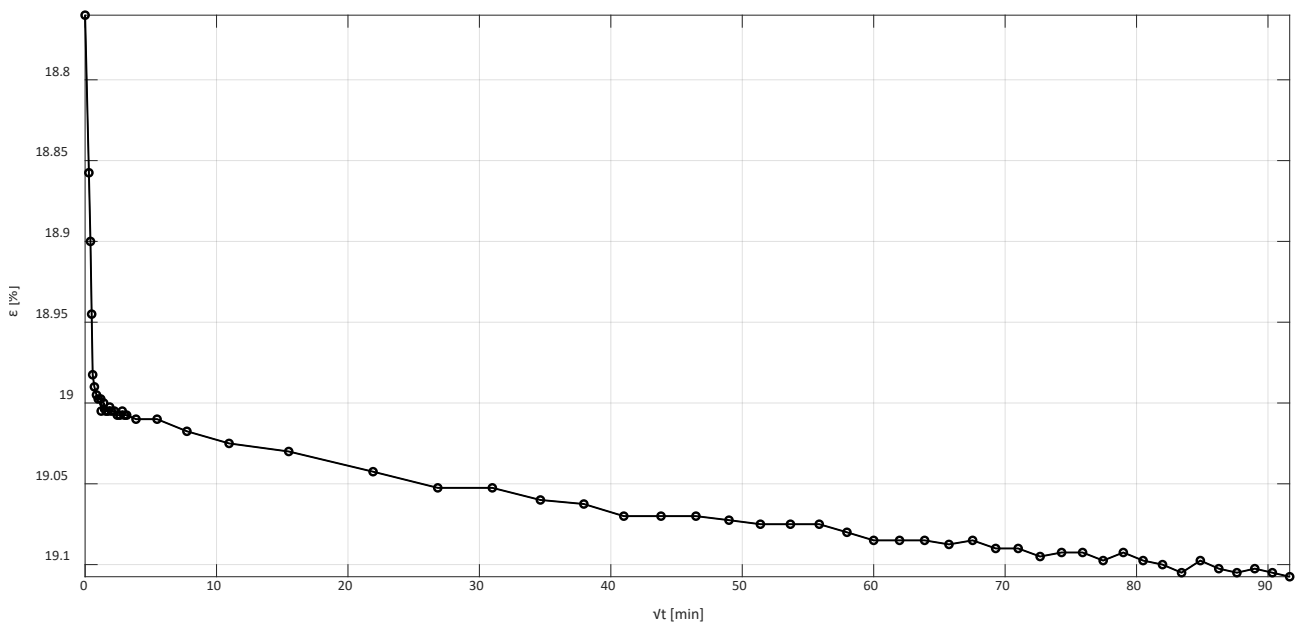

- Phase 17 – $\sigma' = 28540$ kPa

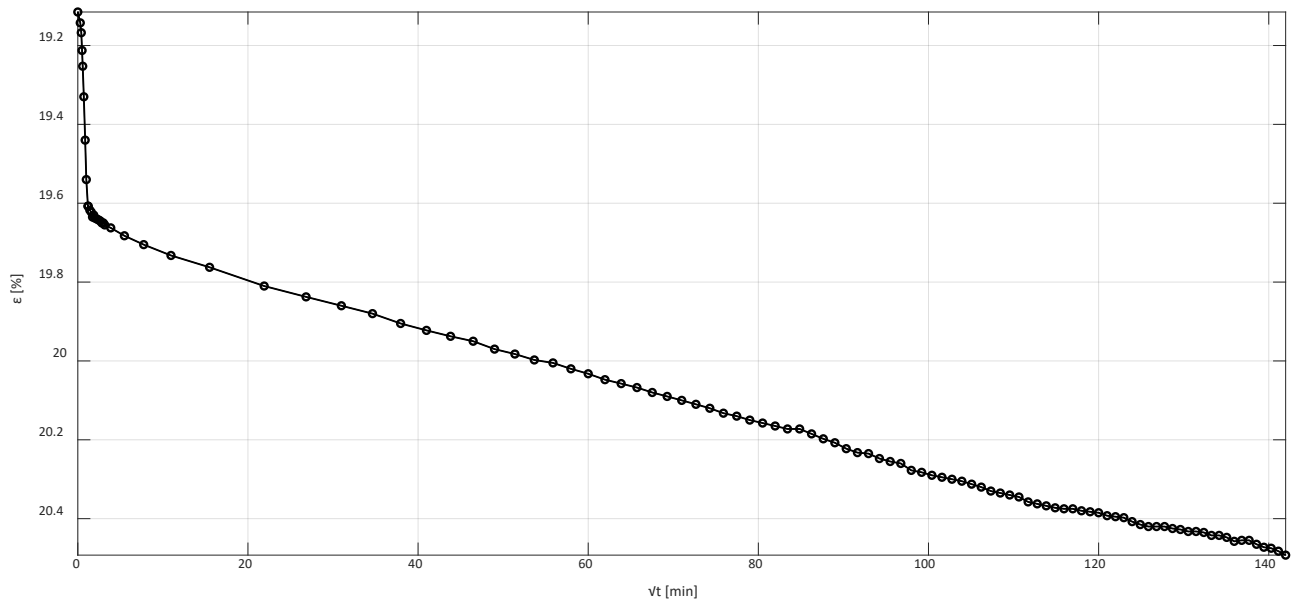


- Phase 18 – $\sigma' = 0$ kPa

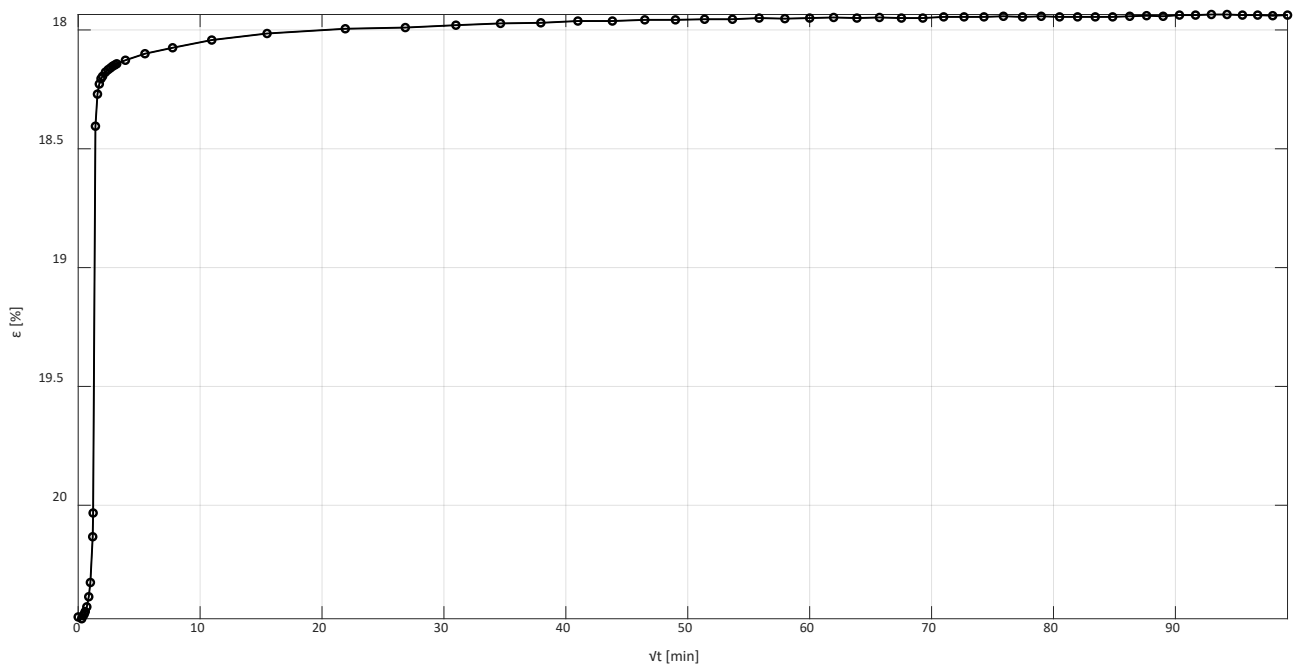


Test 1704CON1001 – Load steps

The results of each load step of Test 1704CON1001 is shown in a $\sqrt{t}$ [min] - ε [%] graph.


- Phase 1 – $\sigma' = 31$ kPa

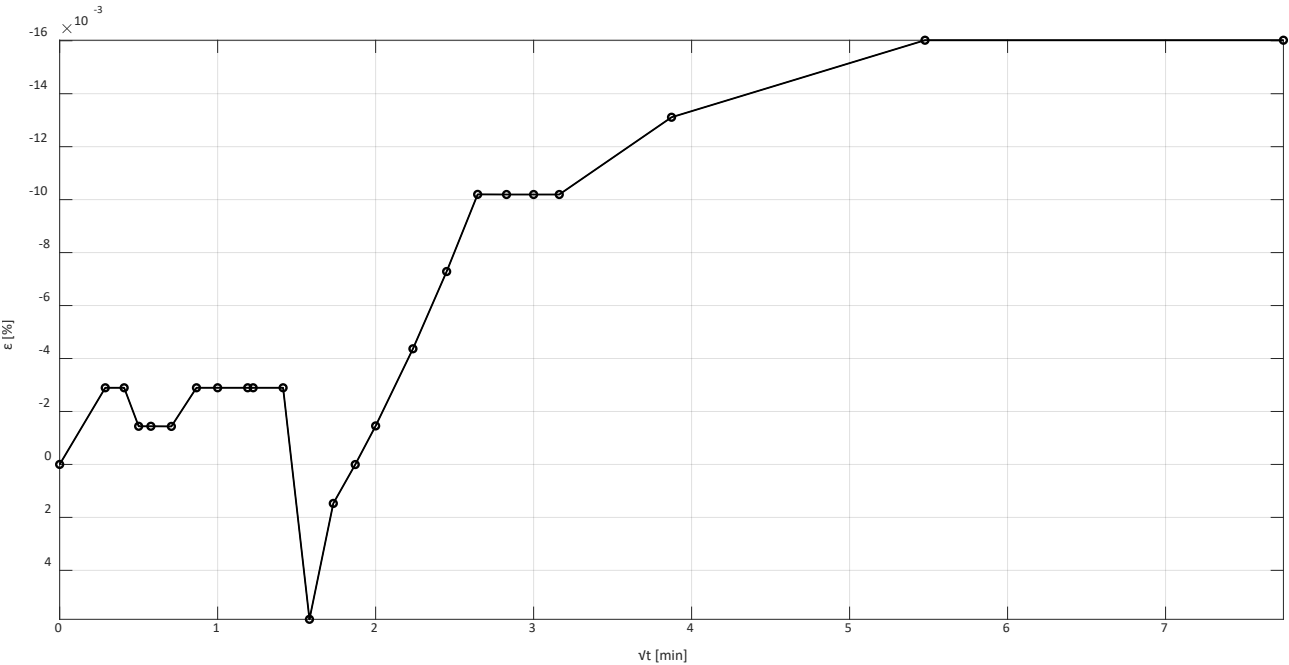


- Phase 2 – $\sigma' = 61$ kPa

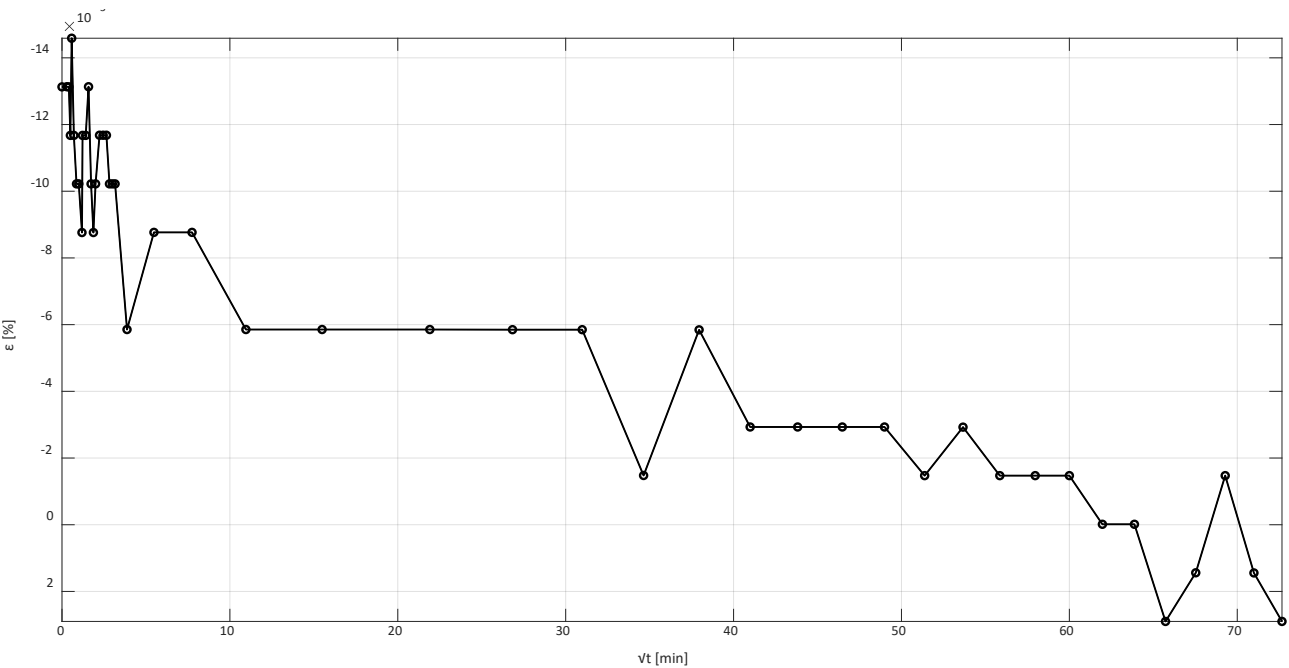


- Phase 3 – $\sigma' = 122 \text{ kPa}$

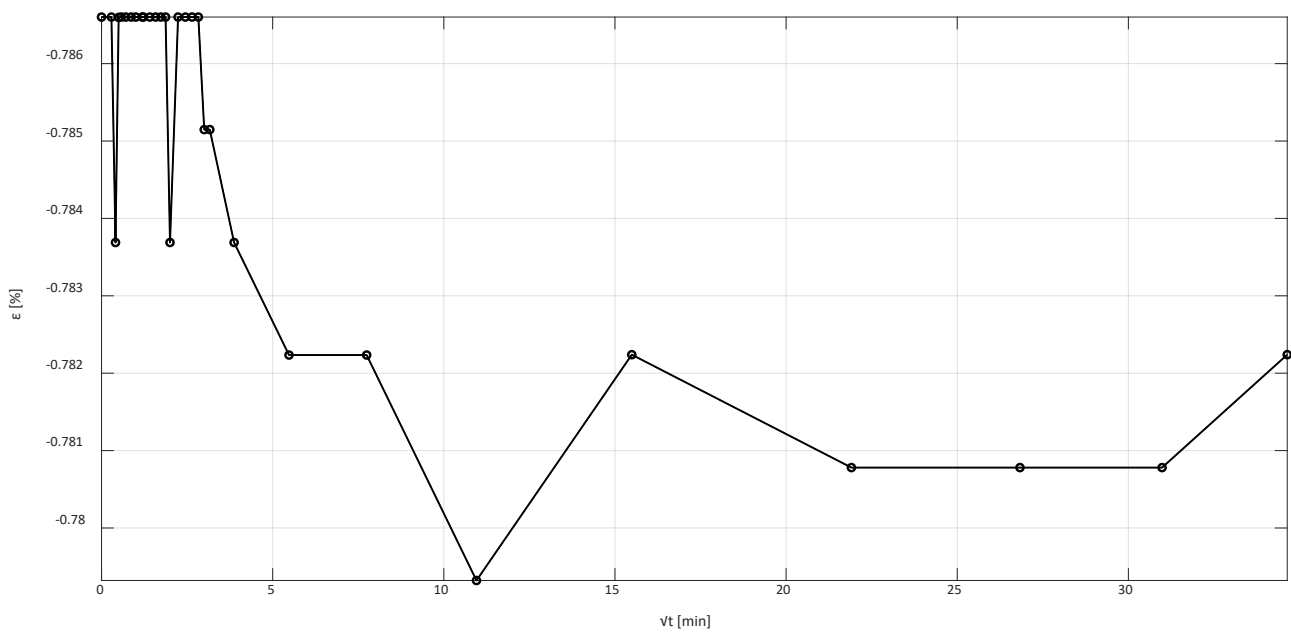


- Phase 4 – $\sigma' = 255 \text{ kPa}$

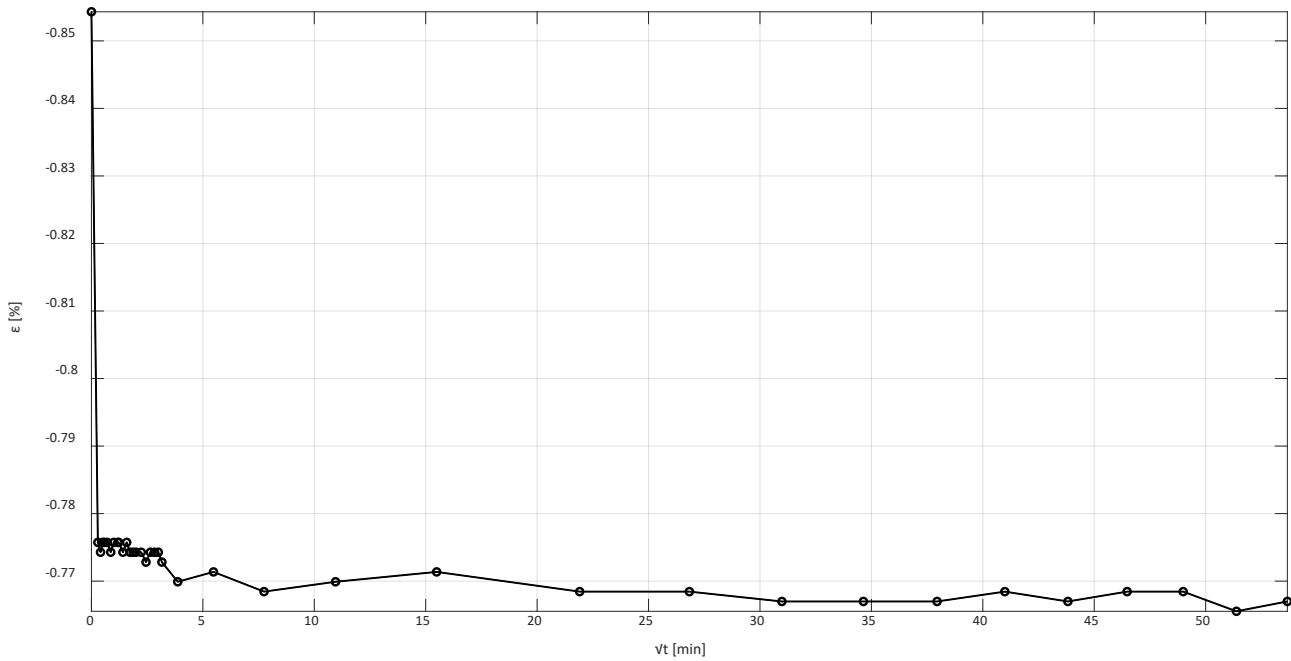


- Phase 5 – $\sigma' = 510$ kPa

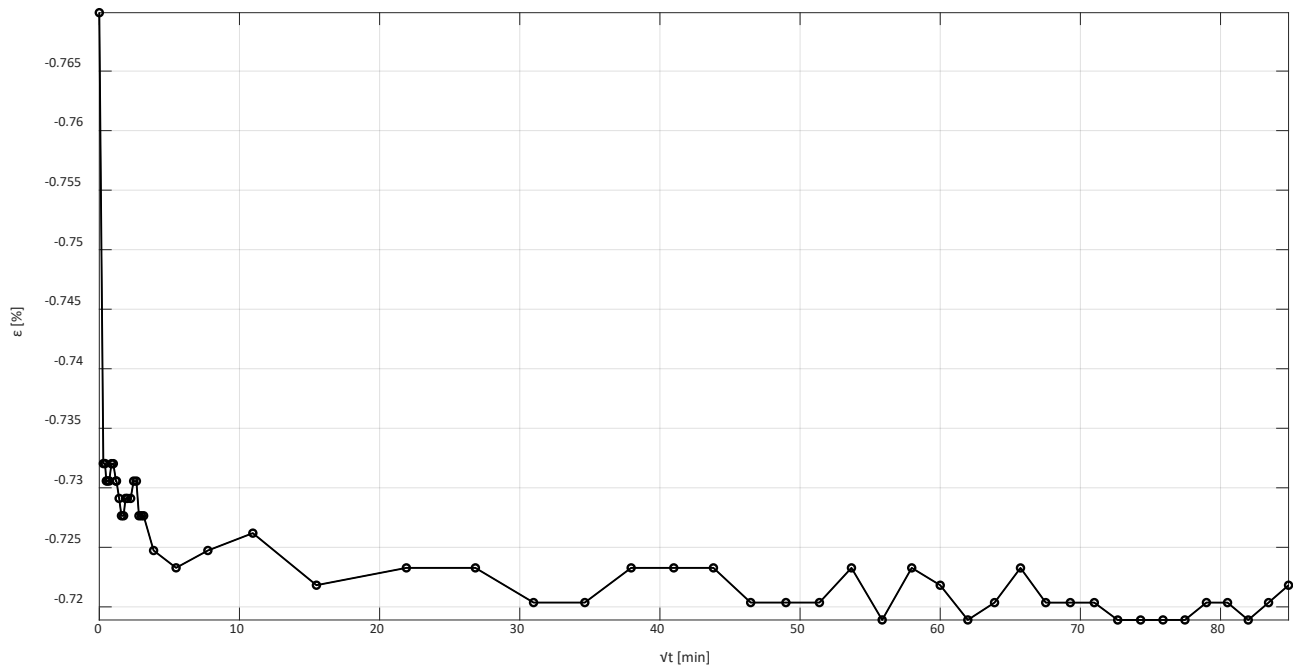


- Phase 6 – $\sigma' = 1019$ kPa

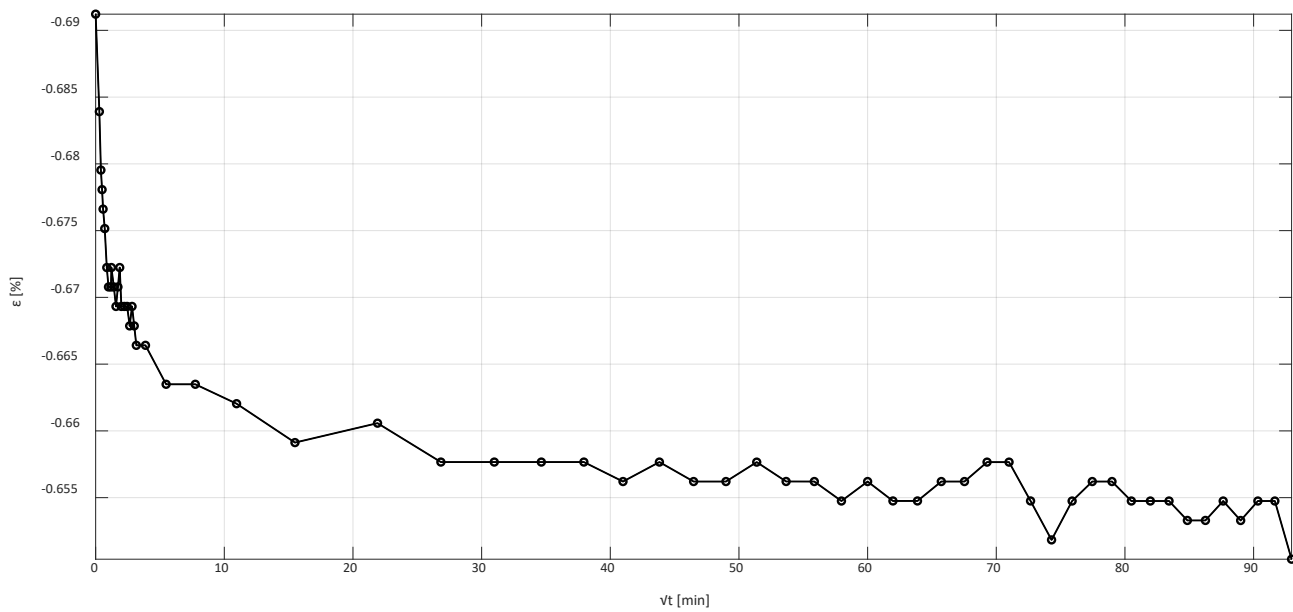


- Phase 7 – $\sigma' = 2039$ kPa

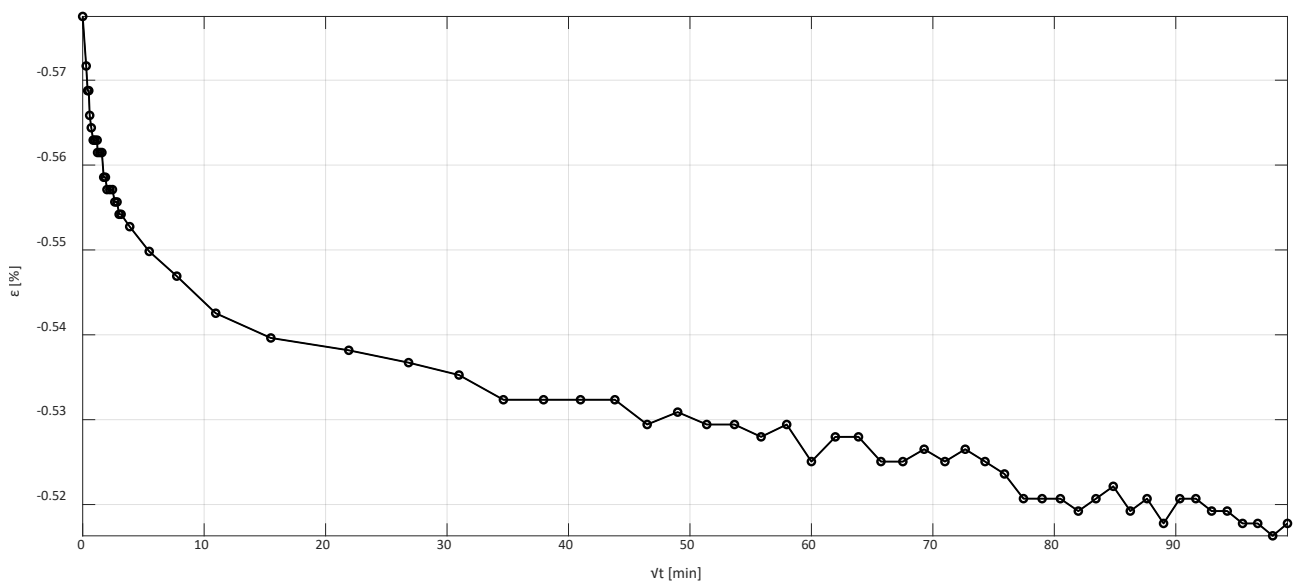


- Phase 8 – $\sigma' = 3567$ kPa

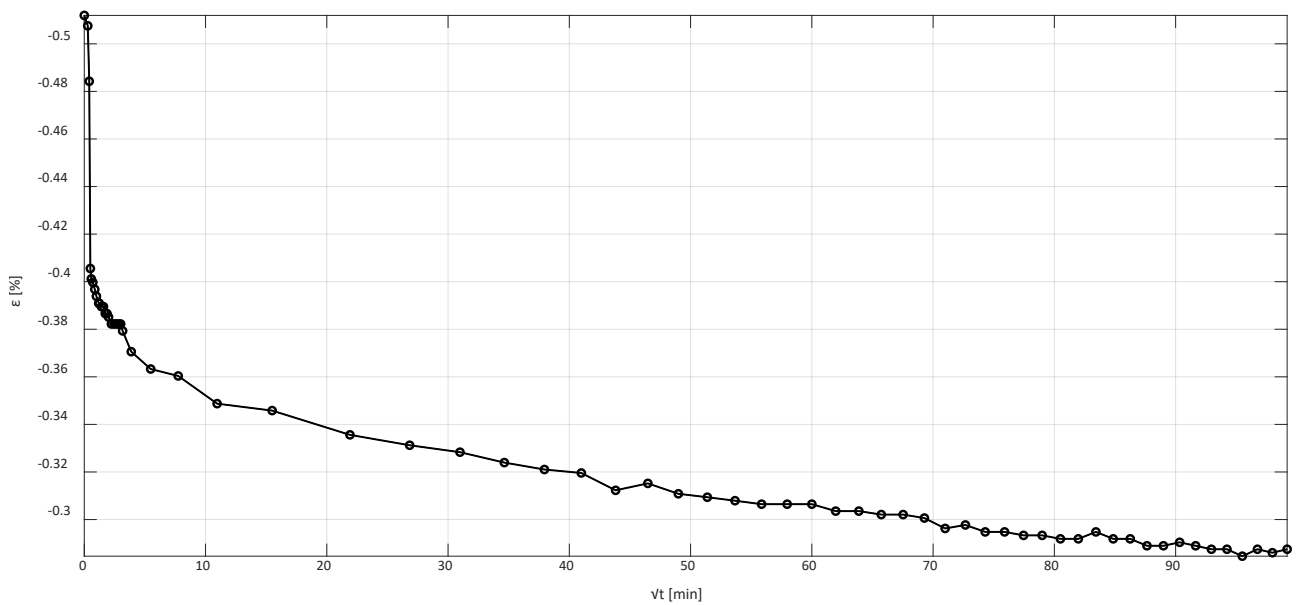


- Phase 9 – $\sigma' = 7135$ kPa

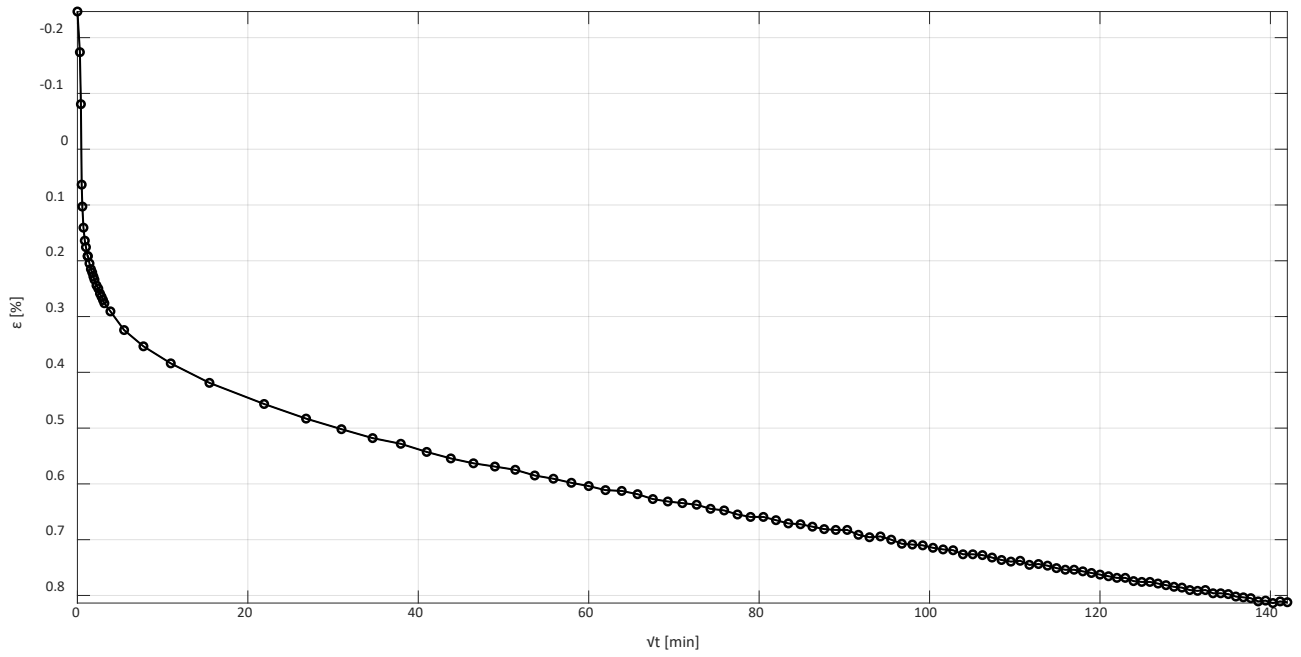


- Phase 10 – $\sigma' = 14270$ kPa

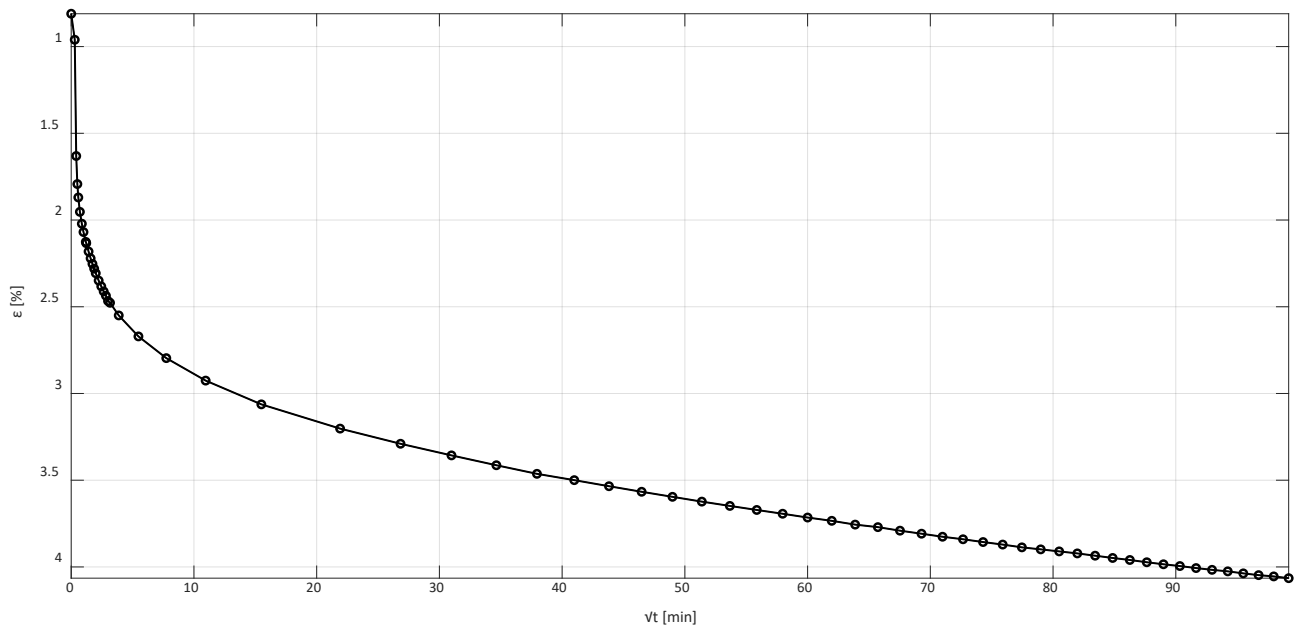


- Phase 11 – $\sigma' = 28540$ kPa

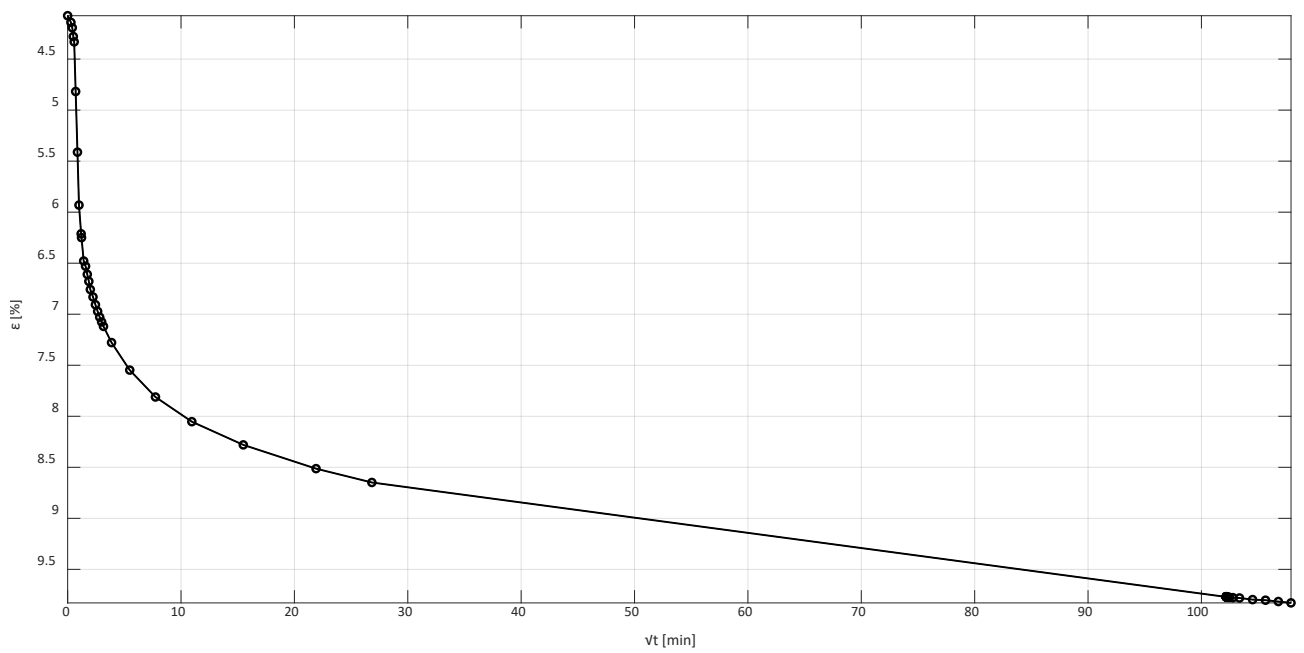


- Phase 12 – $\sigma' = 7135$ kPa

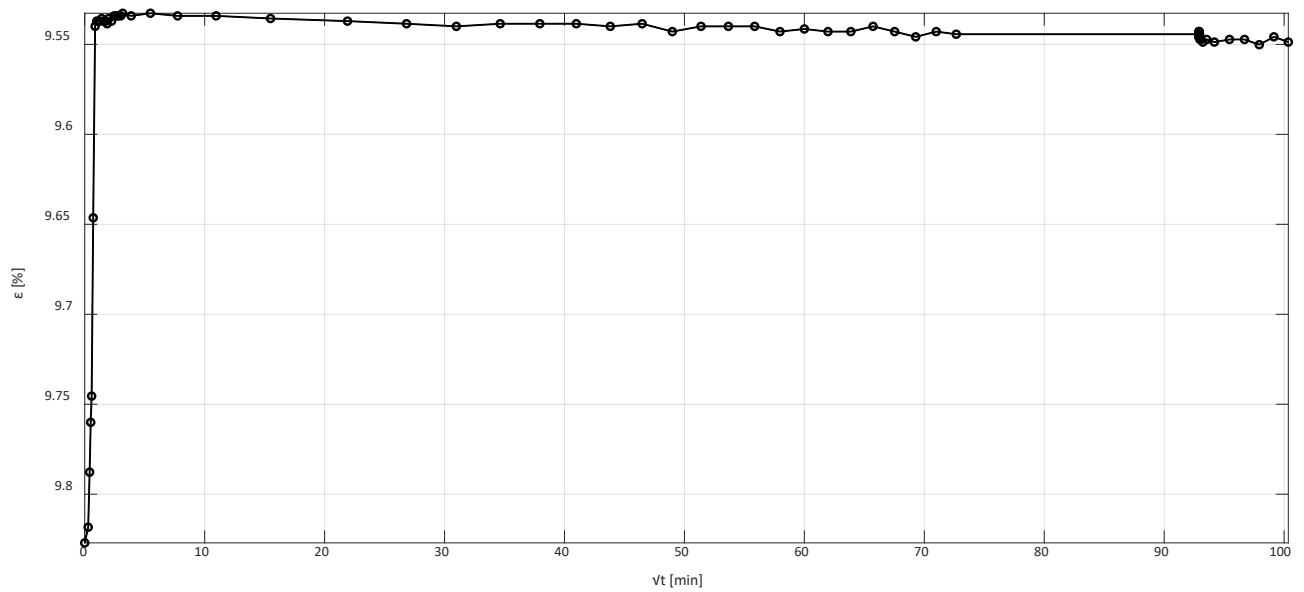


- Phase 13 – $\sigma' = 2039$ kPa

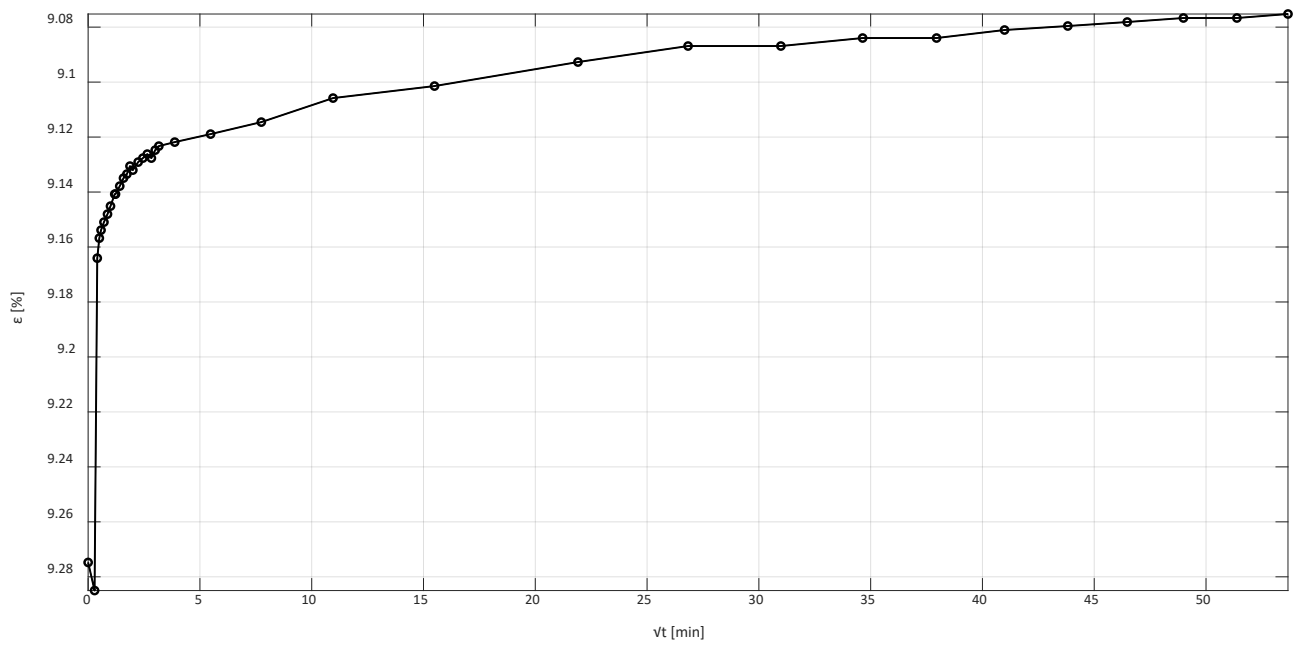


- Phase 14 – $\sigma' = 510$ kPa

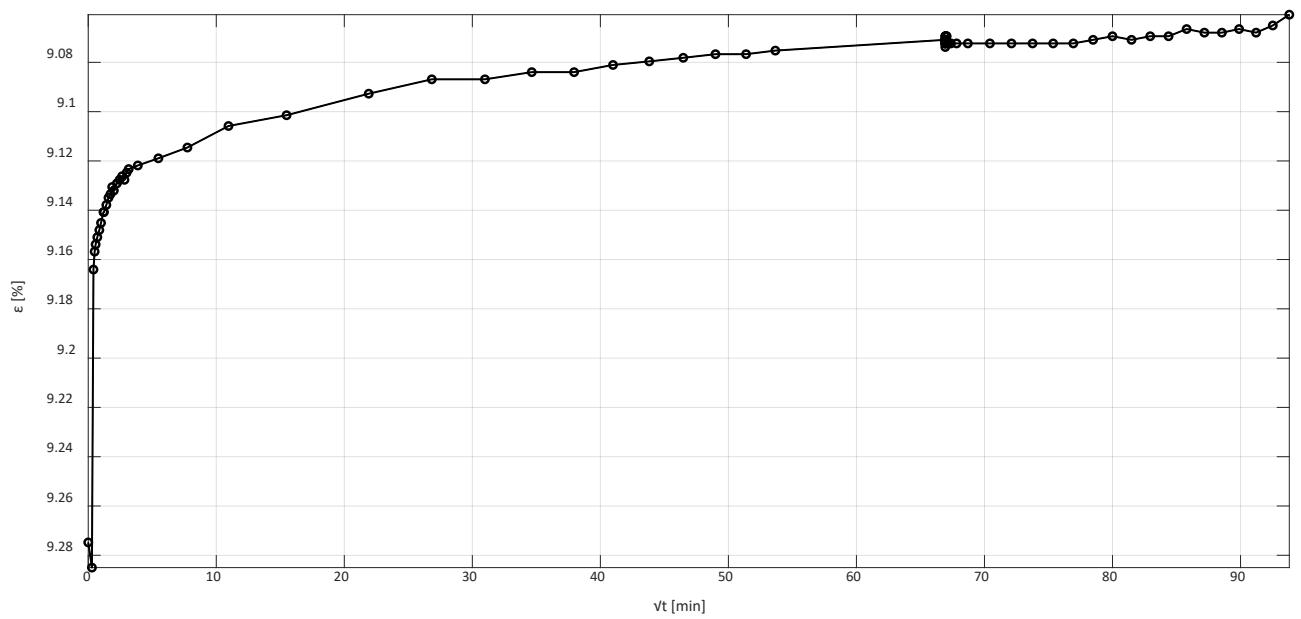


- Phase 15 – $\sigma' = 122$ kPa

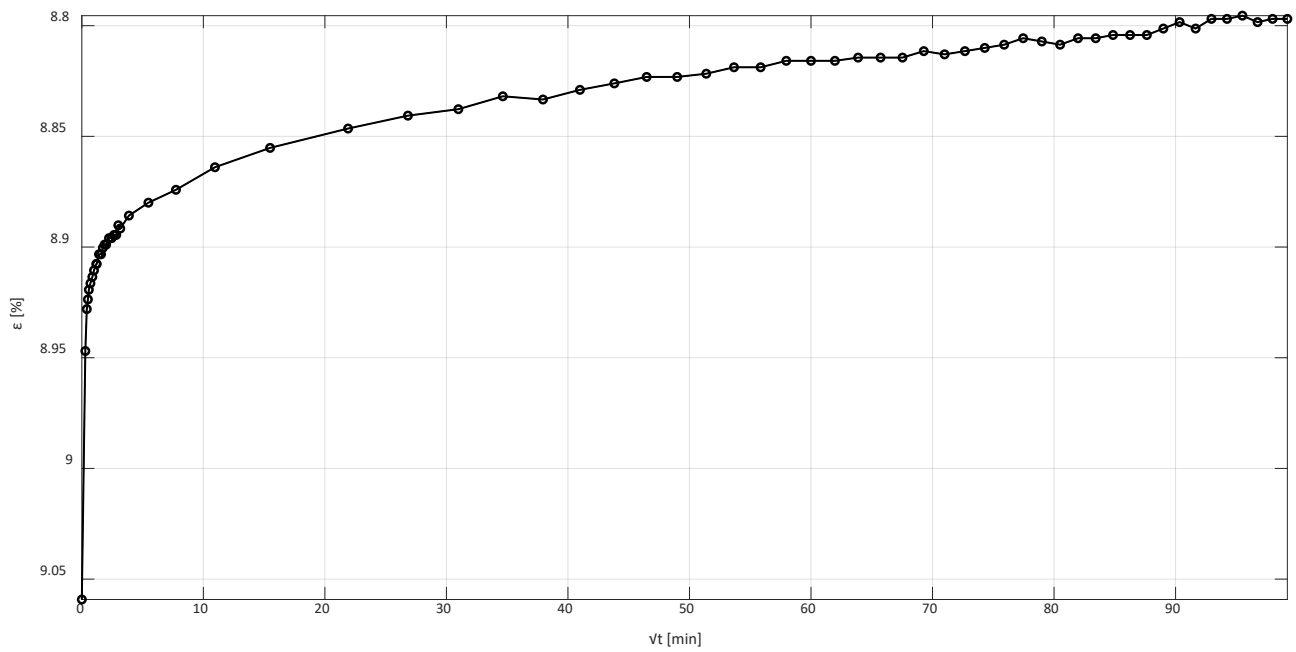


- Phase 16 – $\sigma' = 510$ kPa

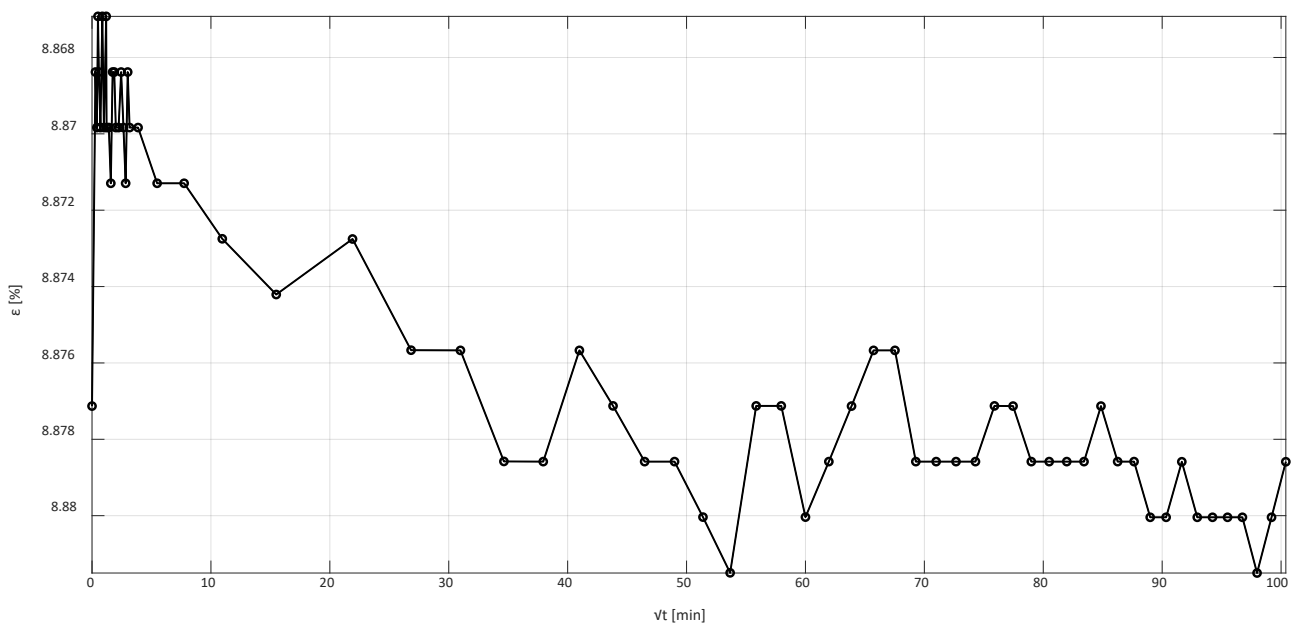


- Phase 17 - $\sigma' = 2039$ kPa

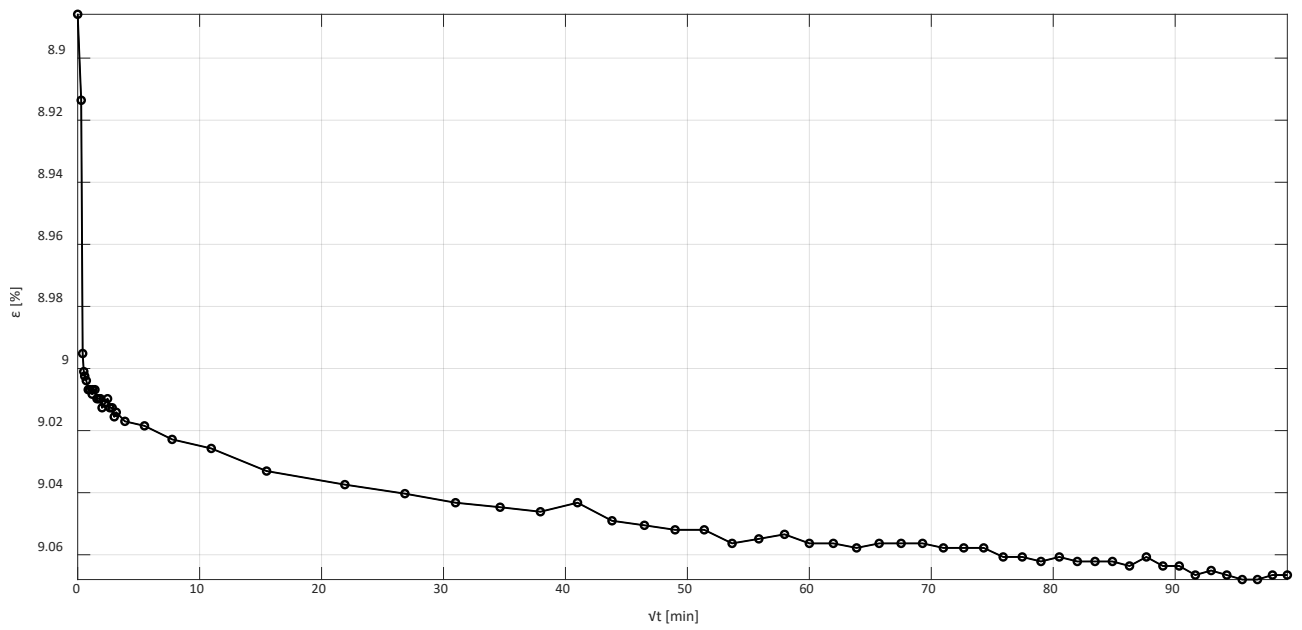


- Phase 18 - $\sigma' = 7135$ kPa

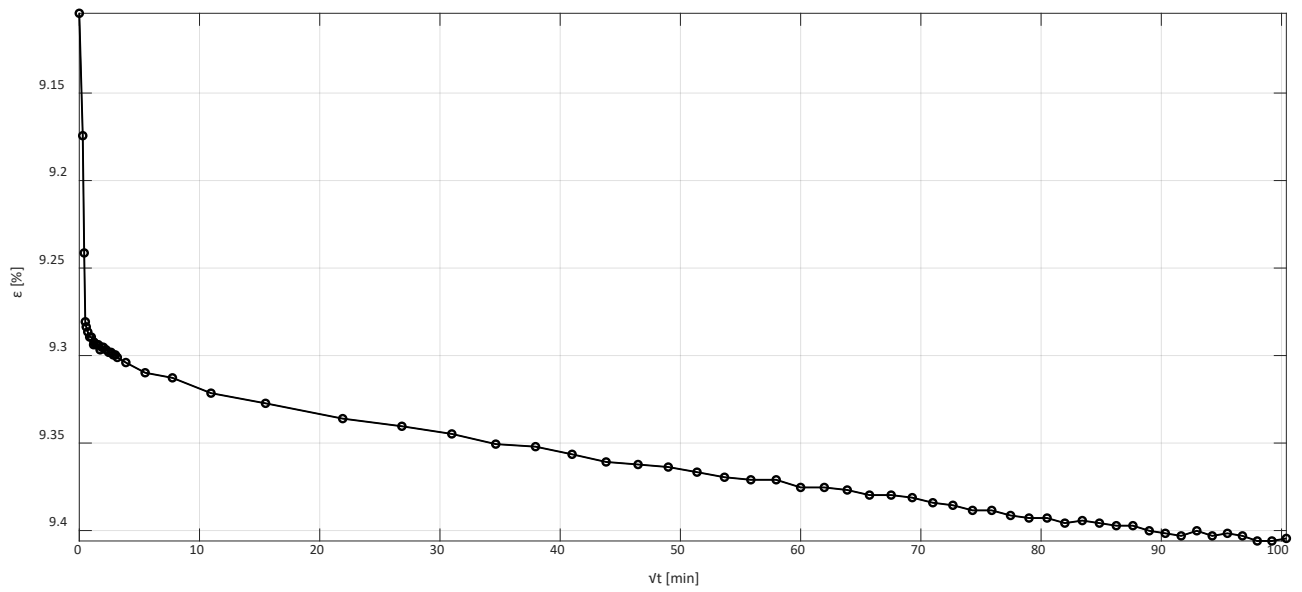

- Phase 19 – $\sigma' = 28540$ kPa

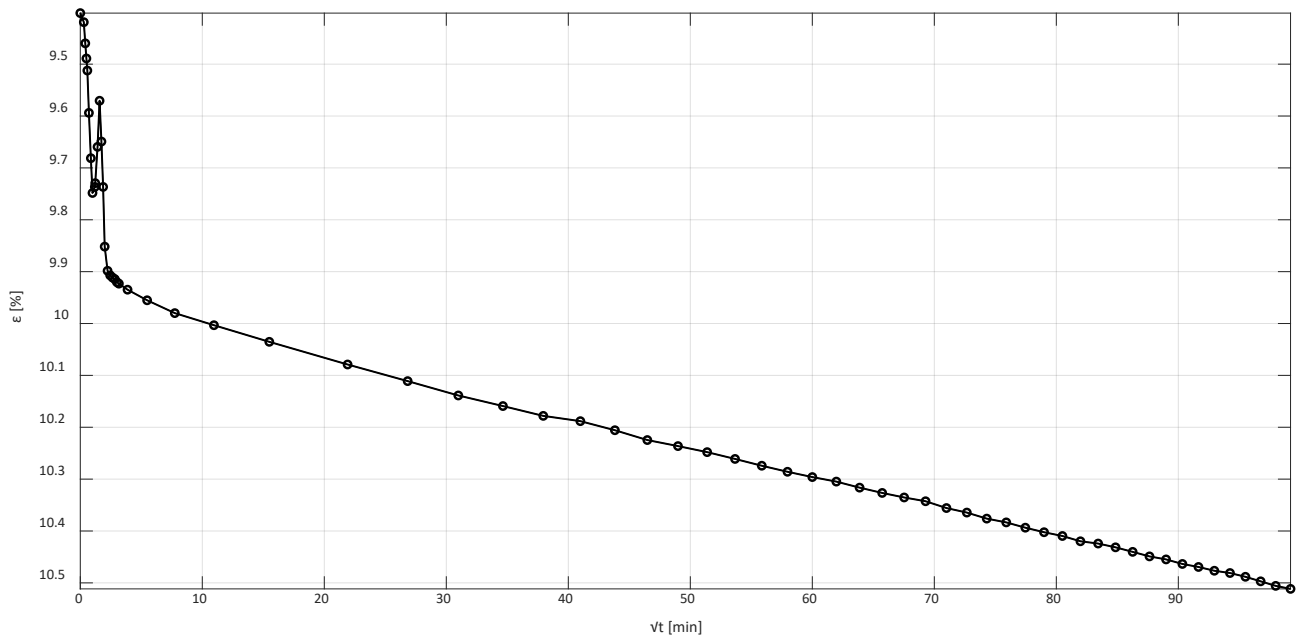


- Phase 20 – $\sigma' = 0$ kPa

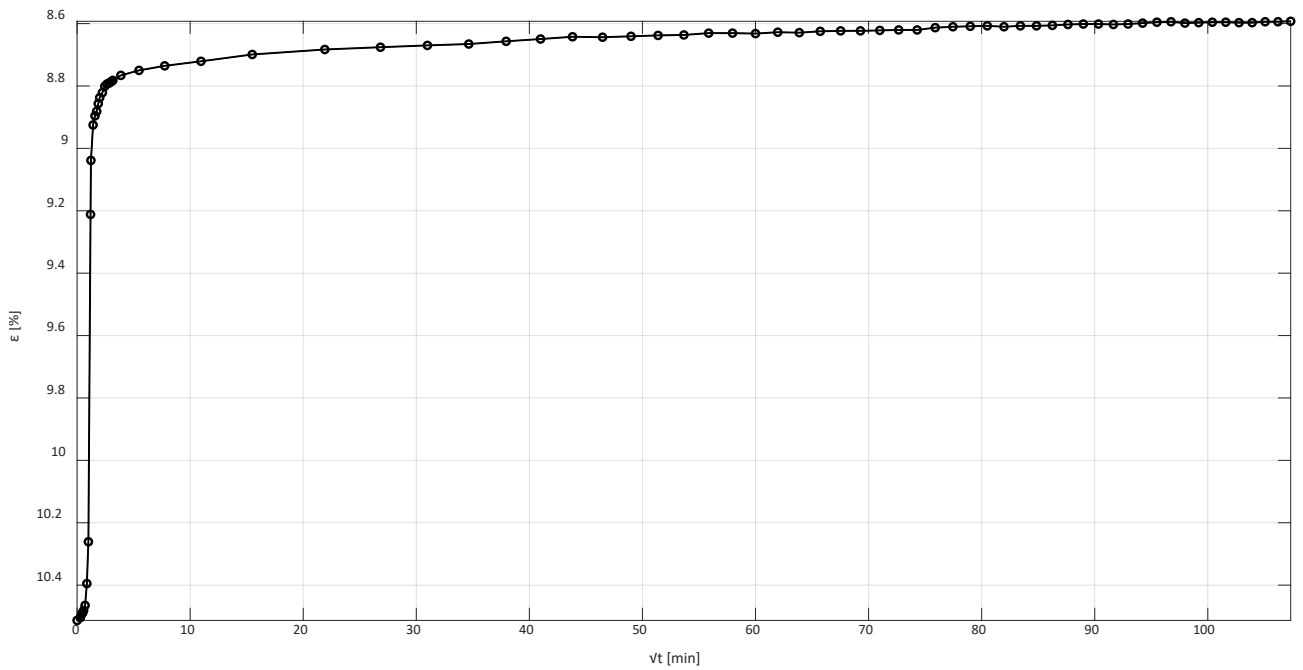


Test 1704CON1103 – Load steps

The results of each load step of Test 1704CON1103 is shown in a $\sqrt{t}$ [min] - ε [%] graph.


- Phase 1 – $\sigma' = 122$ kPa

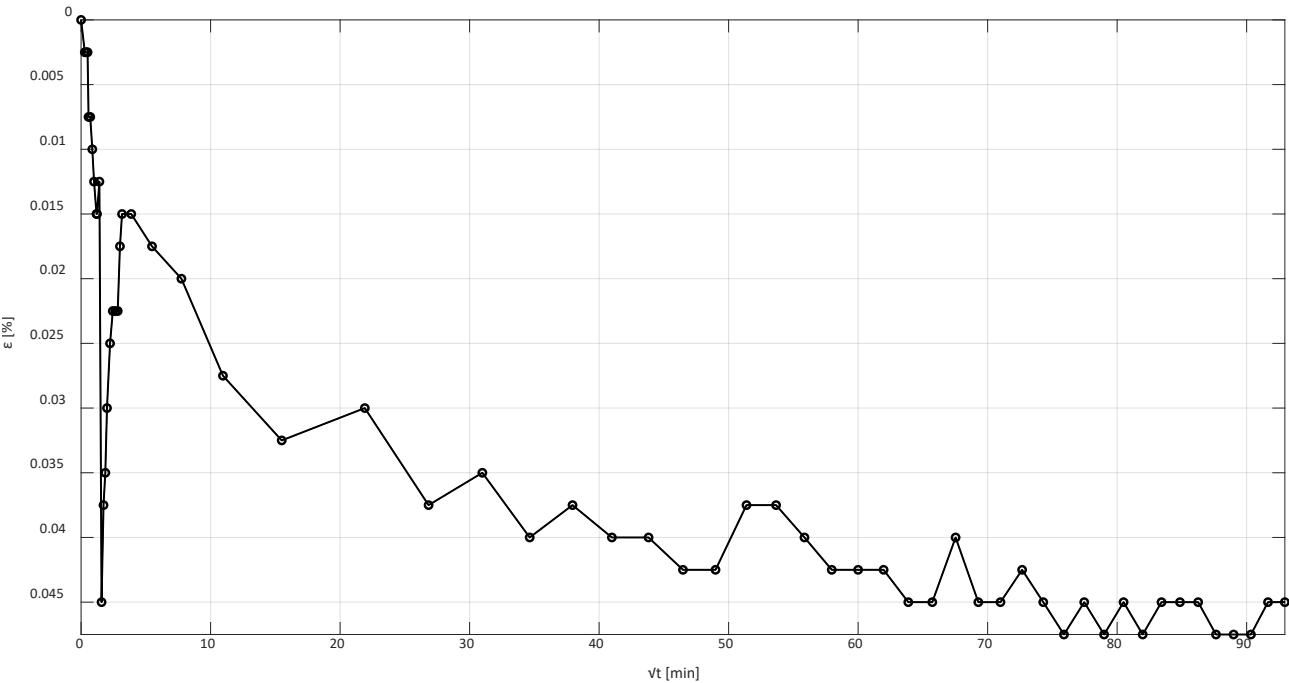


- Phase 2 – $\sigma' = 255$ kPa

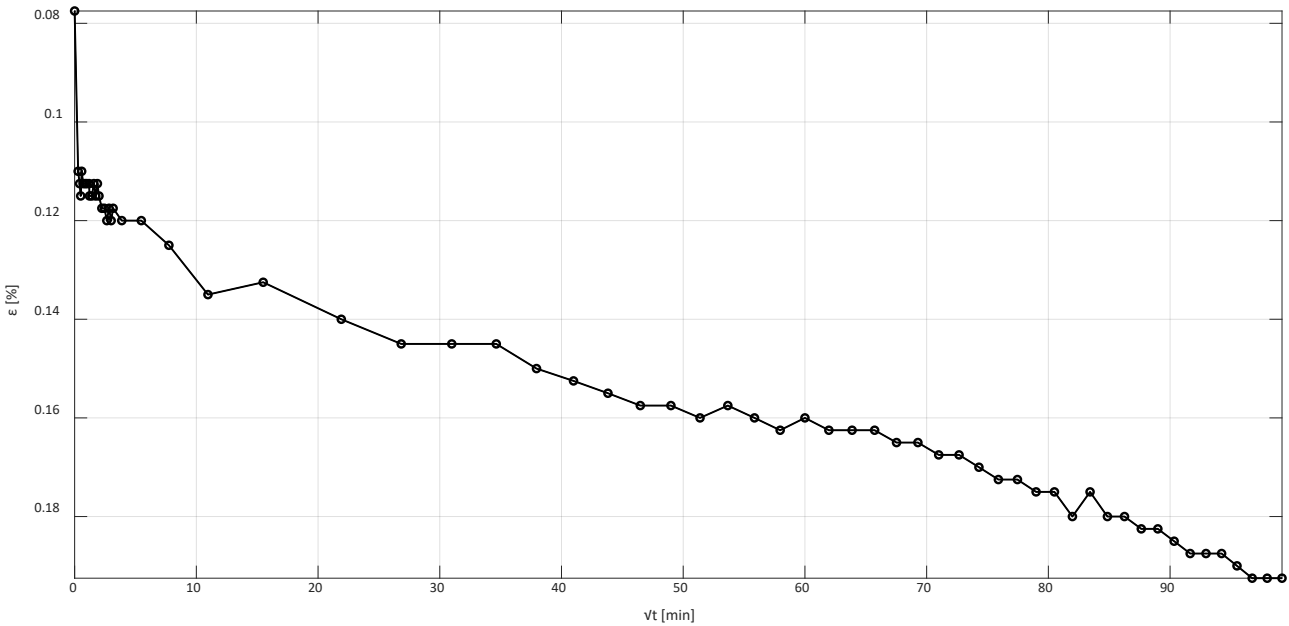


- Phase 3 – $\sigma' = 510$ kPa

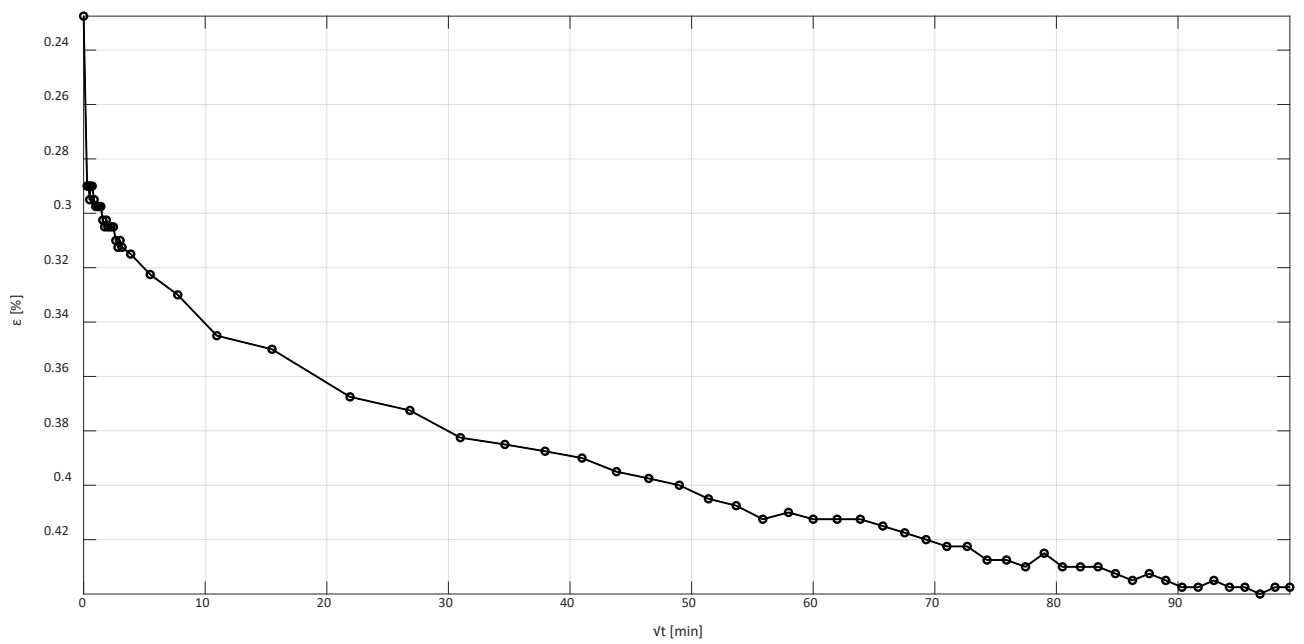


- Phase 4 – $\sigma' = 1019$ kPa

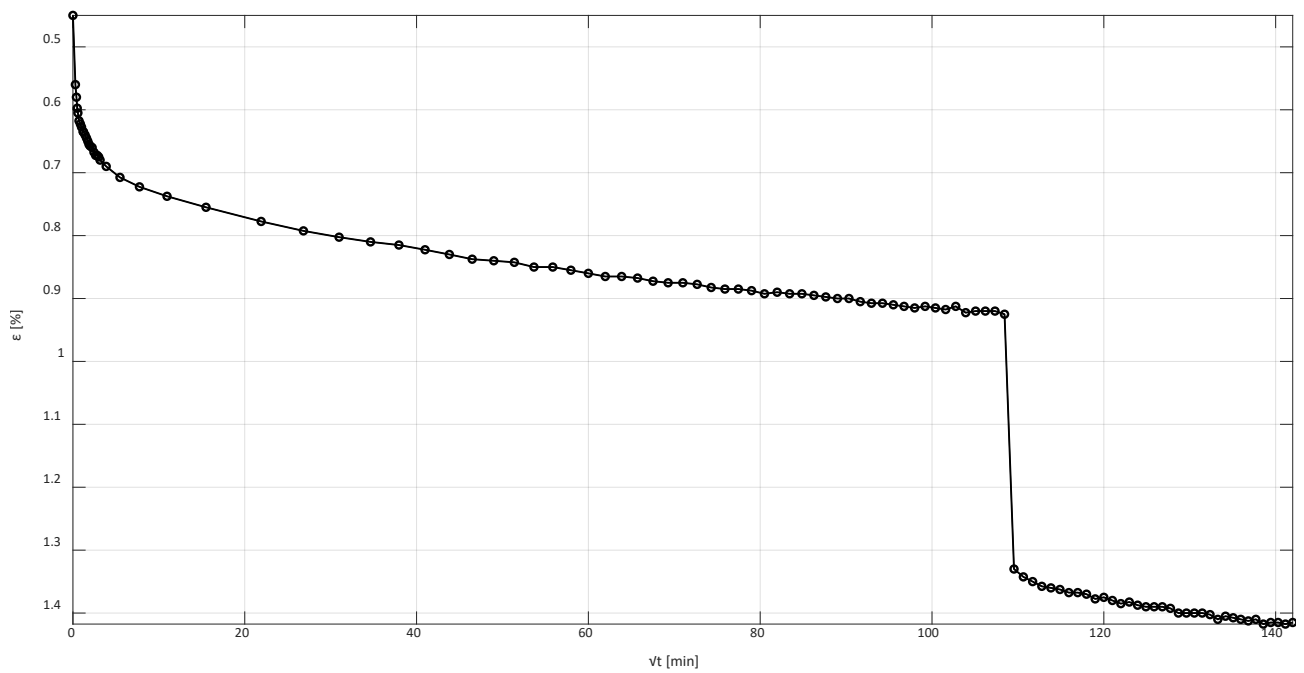


- Phase 5 – $\sigma' = 2039$ kPa

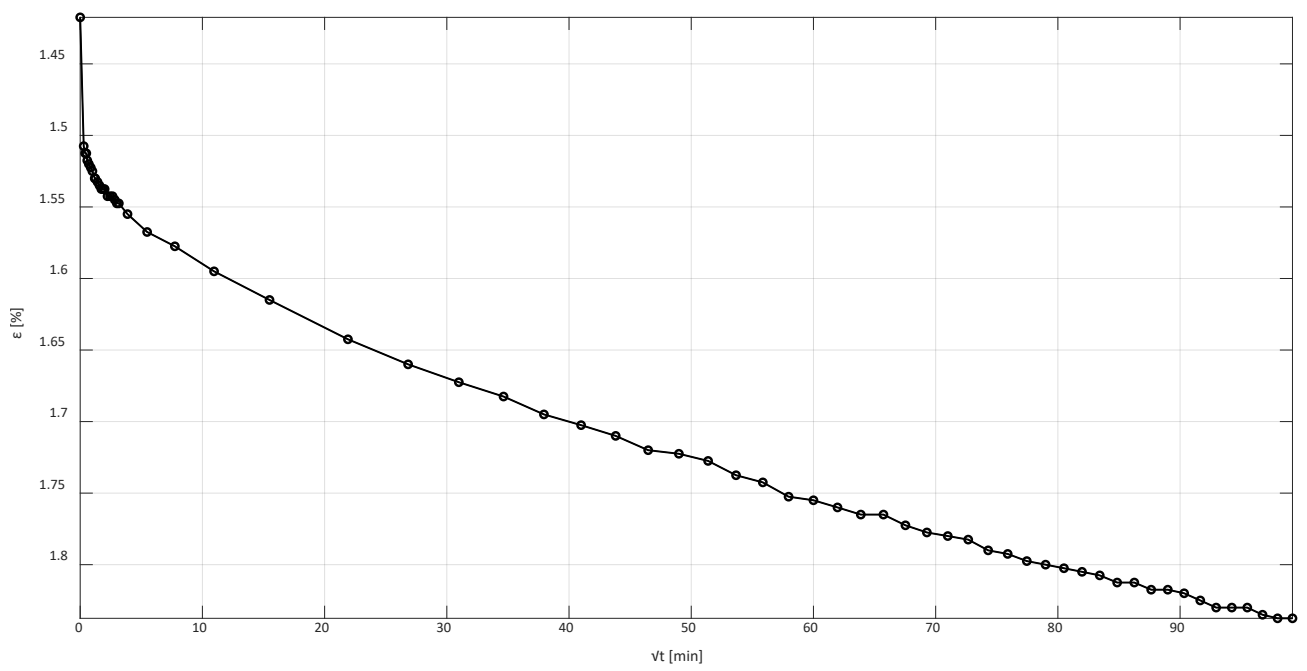


- Phase 6 – $\sigma' = 3567$ kPa

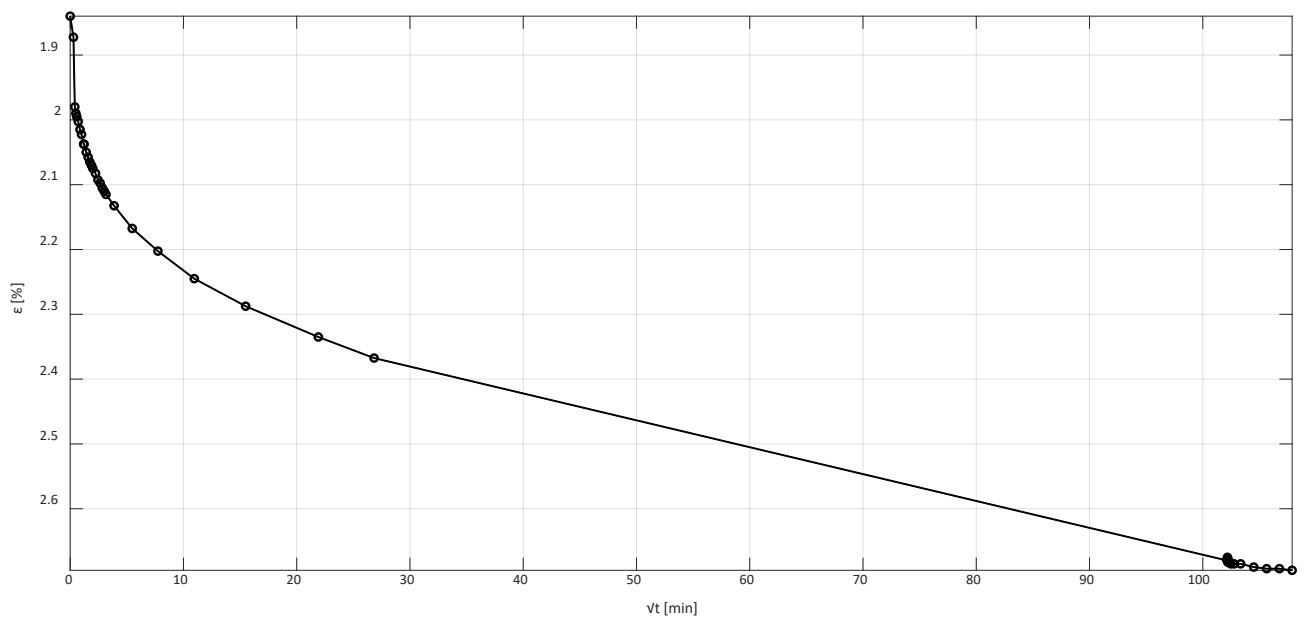


- Phase 7 – $\sigma' = 7135$ kPa

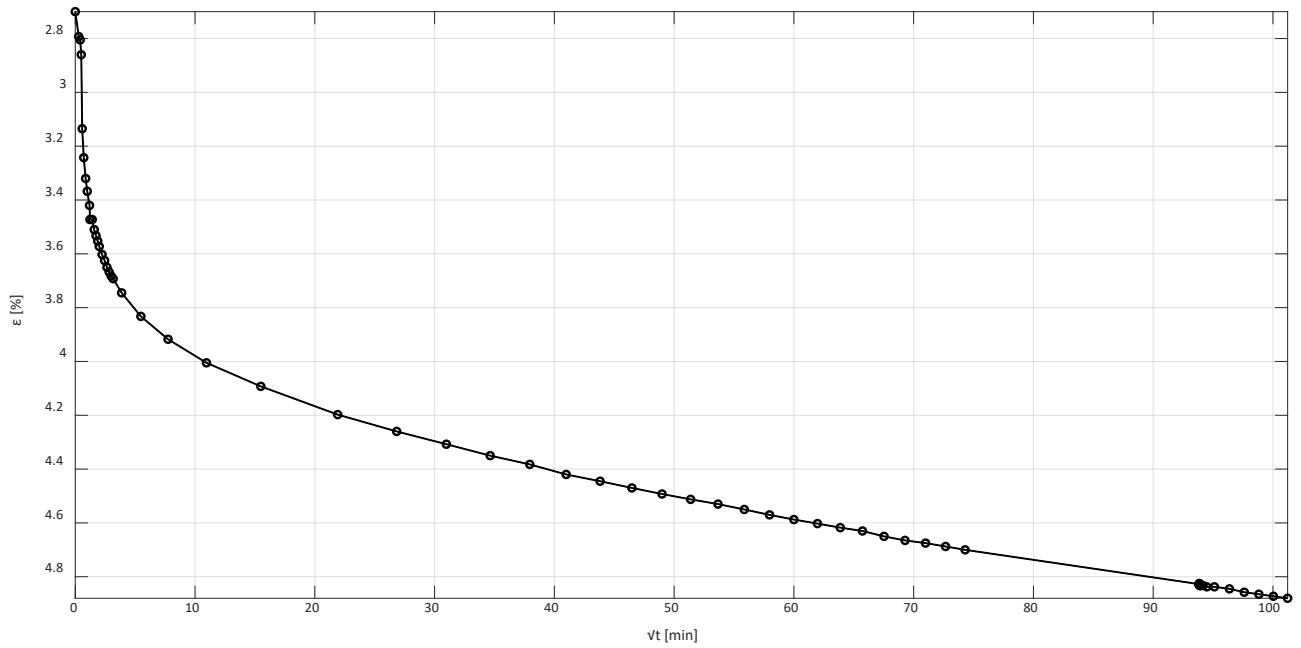


- Phase 8 – $\sigma' = 14270$ kPa

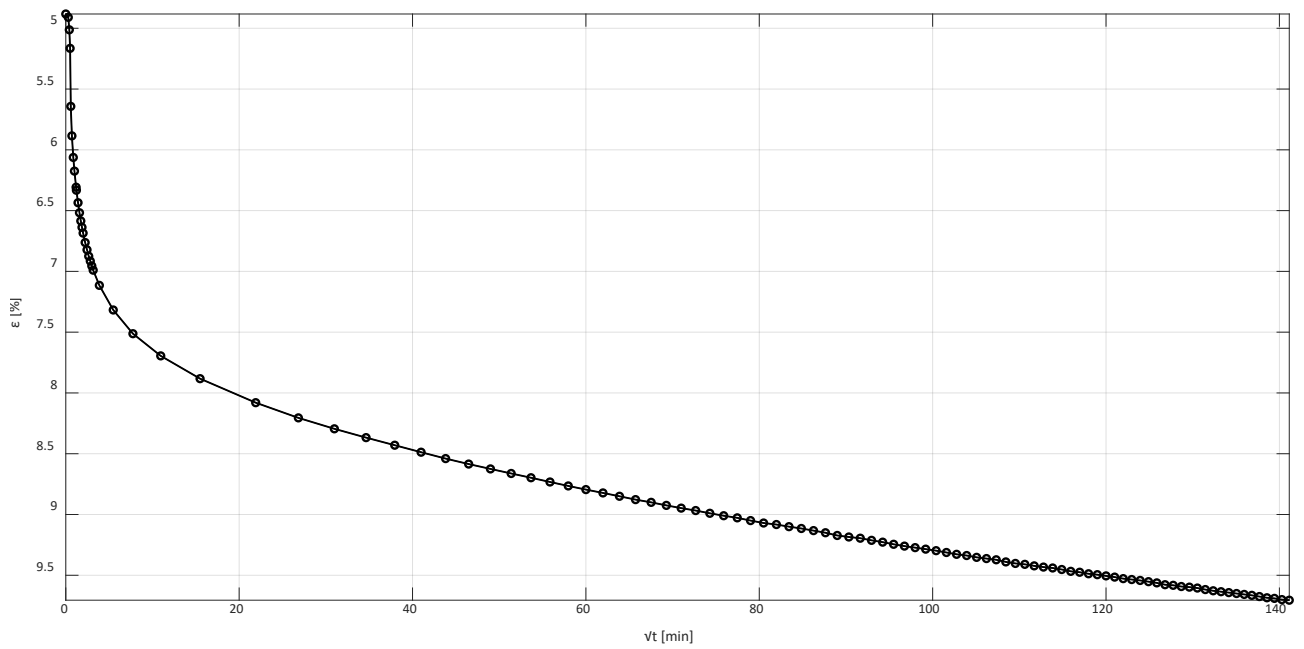


- Phase 9 – $\sigma' = 28540$ kPa

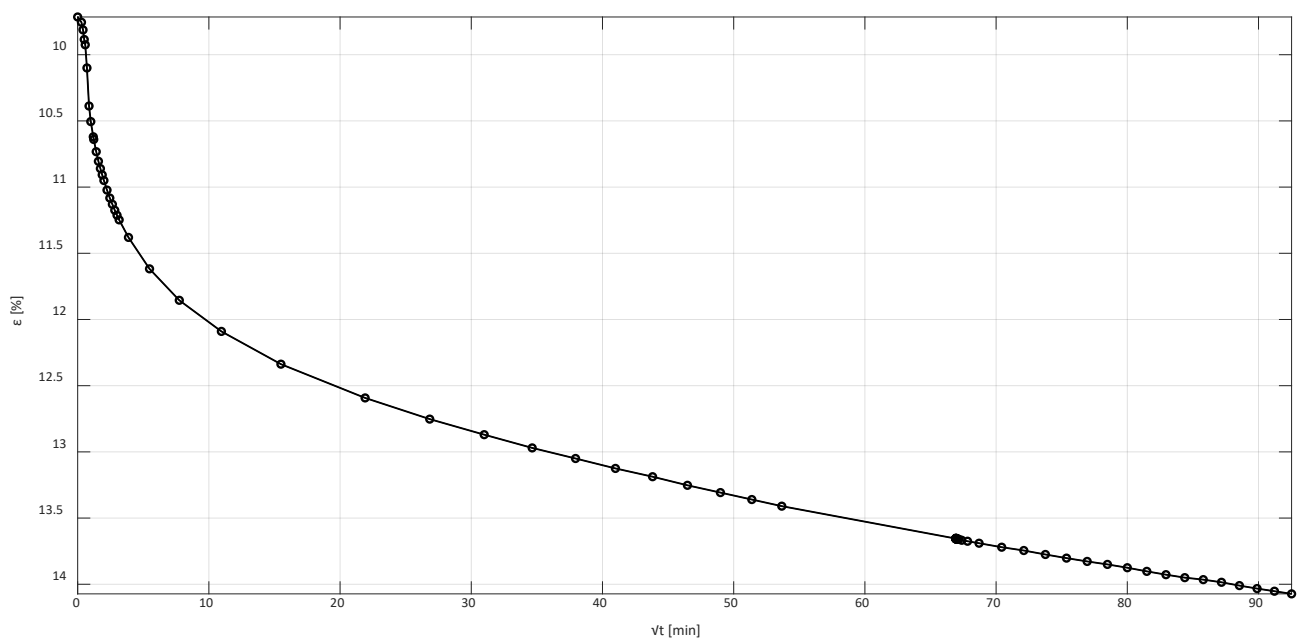


- Phase 10 – $\sigma' = 7135$ kPa

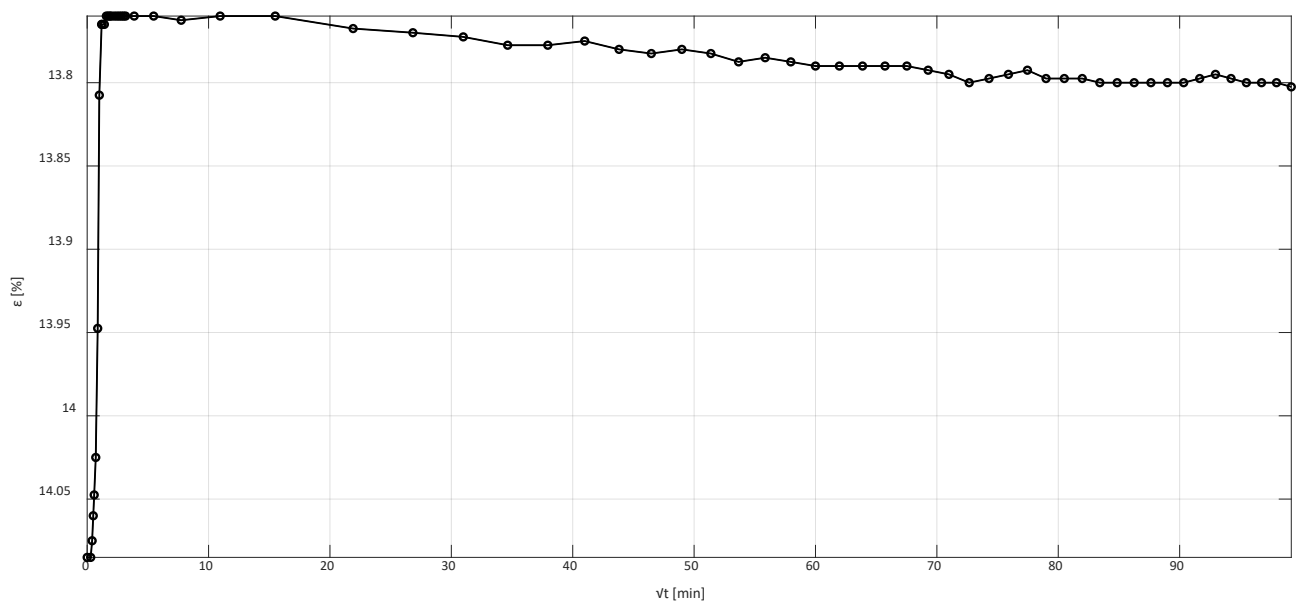


- Phase 11 – $\sigma' = 2039$ kPa

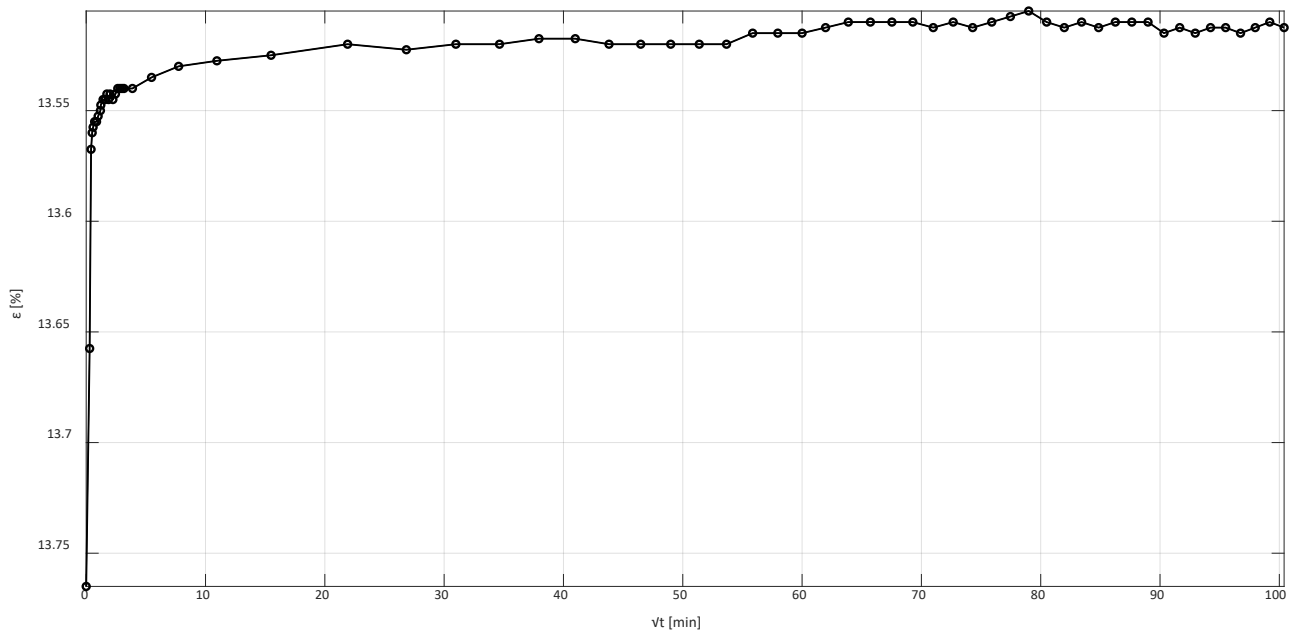


- Phase 12 – $\sigma' = 510$ kPa

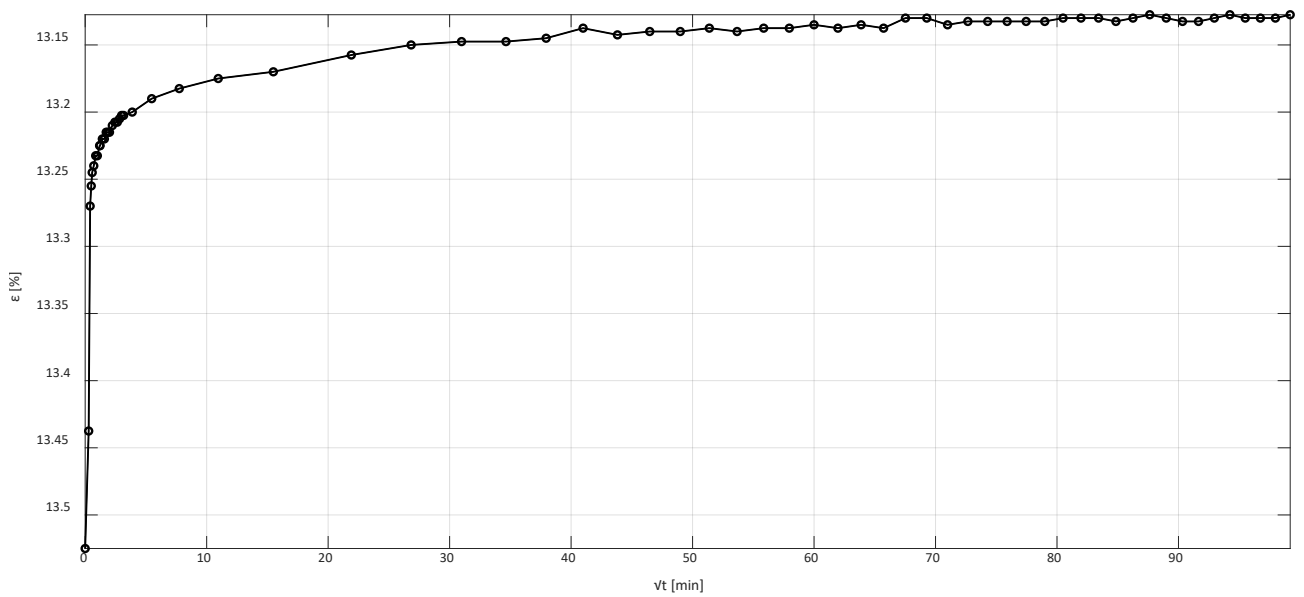


- Phase 13 – $\sigma' = 122$ kPa

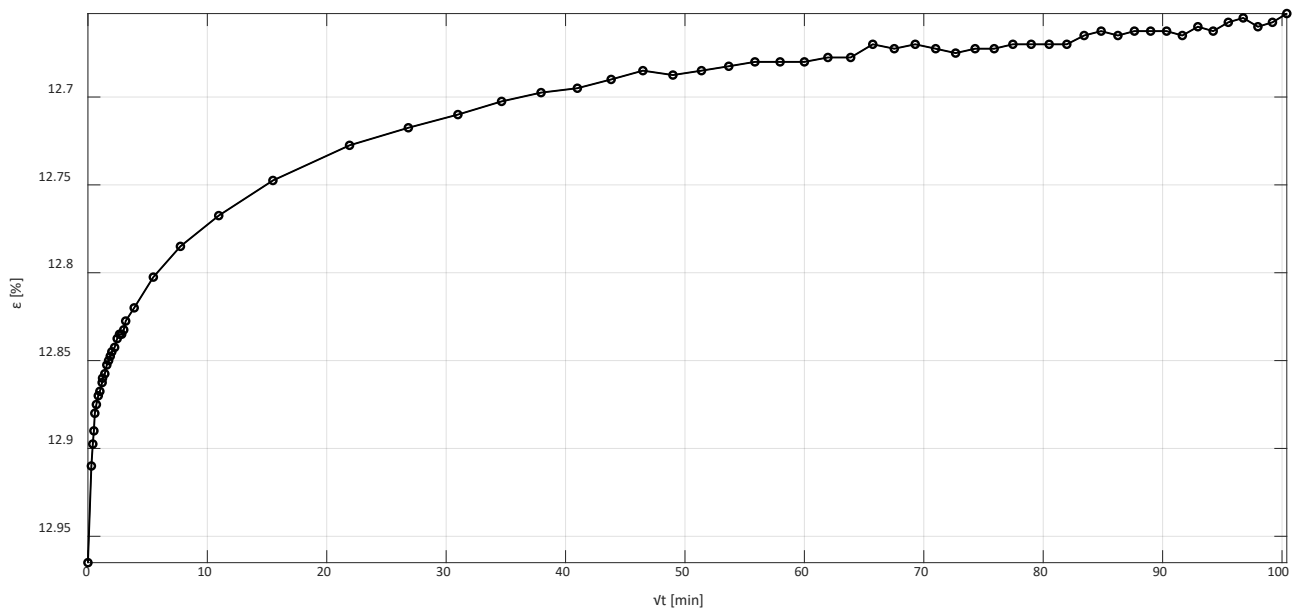


- Phase 14 – $\sigma' = 510$ kPa

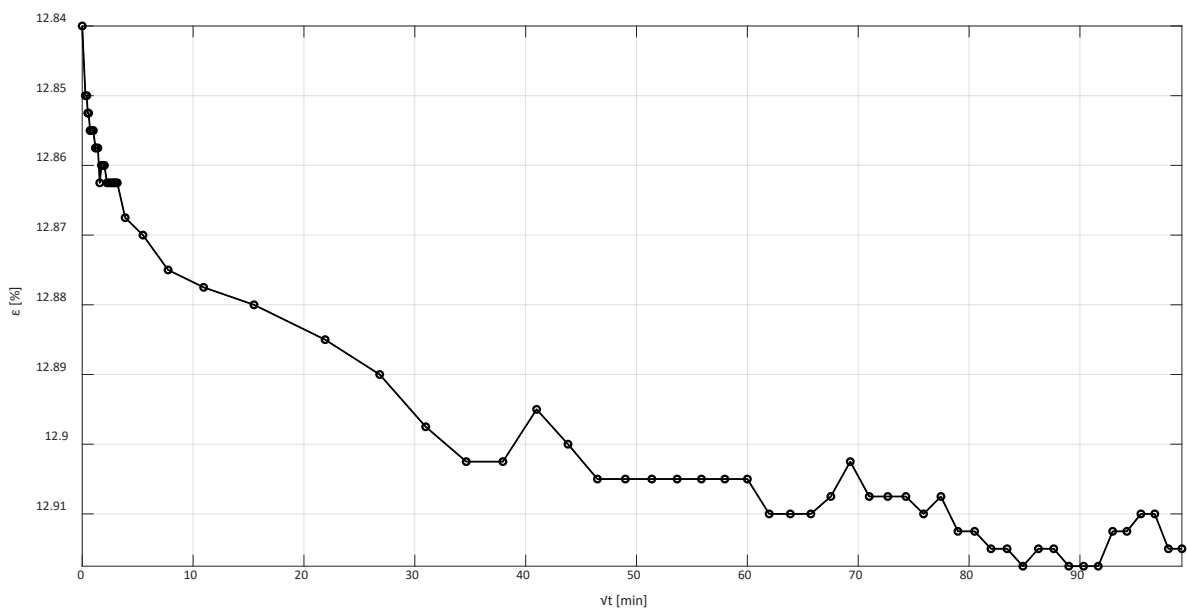


- Phase 15 – $\sigma' = 2039$ kPa

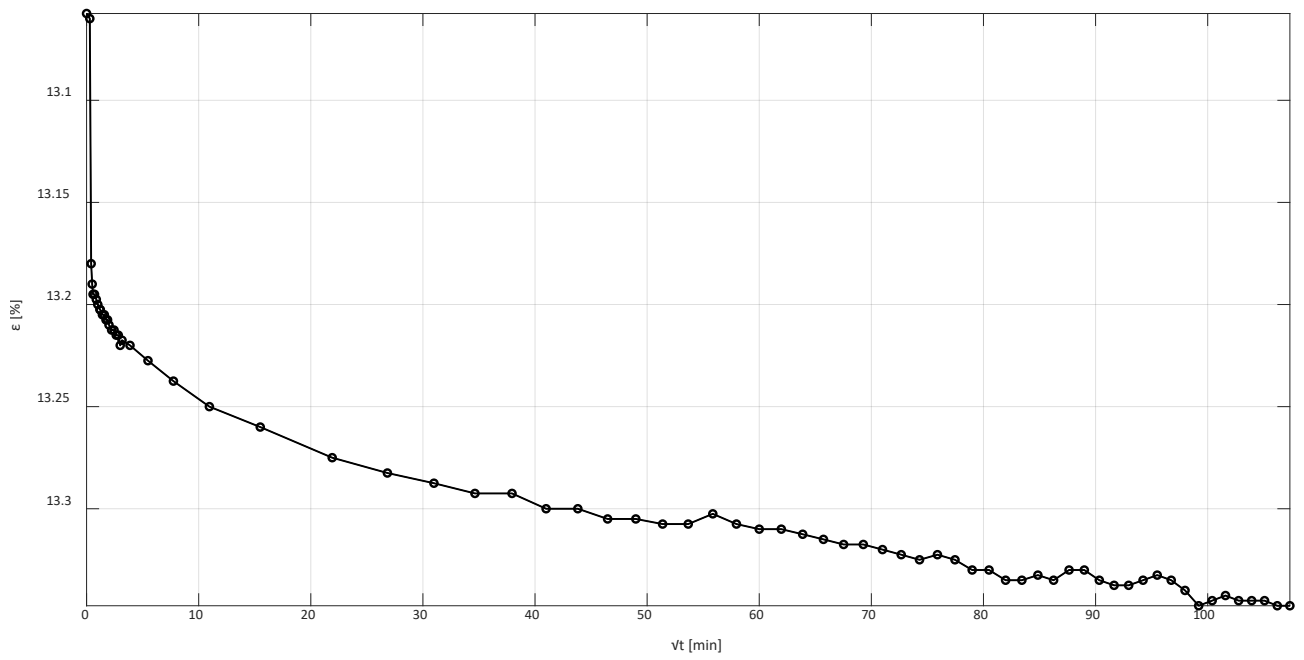


- Phase 16 – $\sigma' = 7135$ kPa

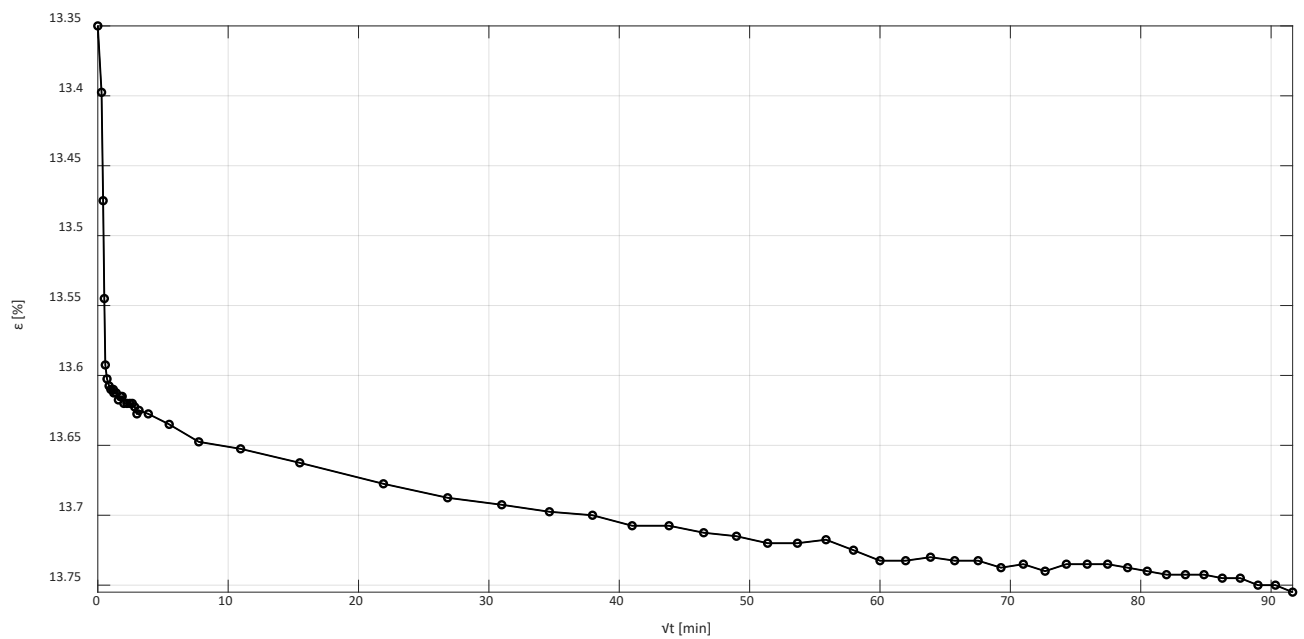

- Phase 17 – $\sigma' = 28540$ kPa

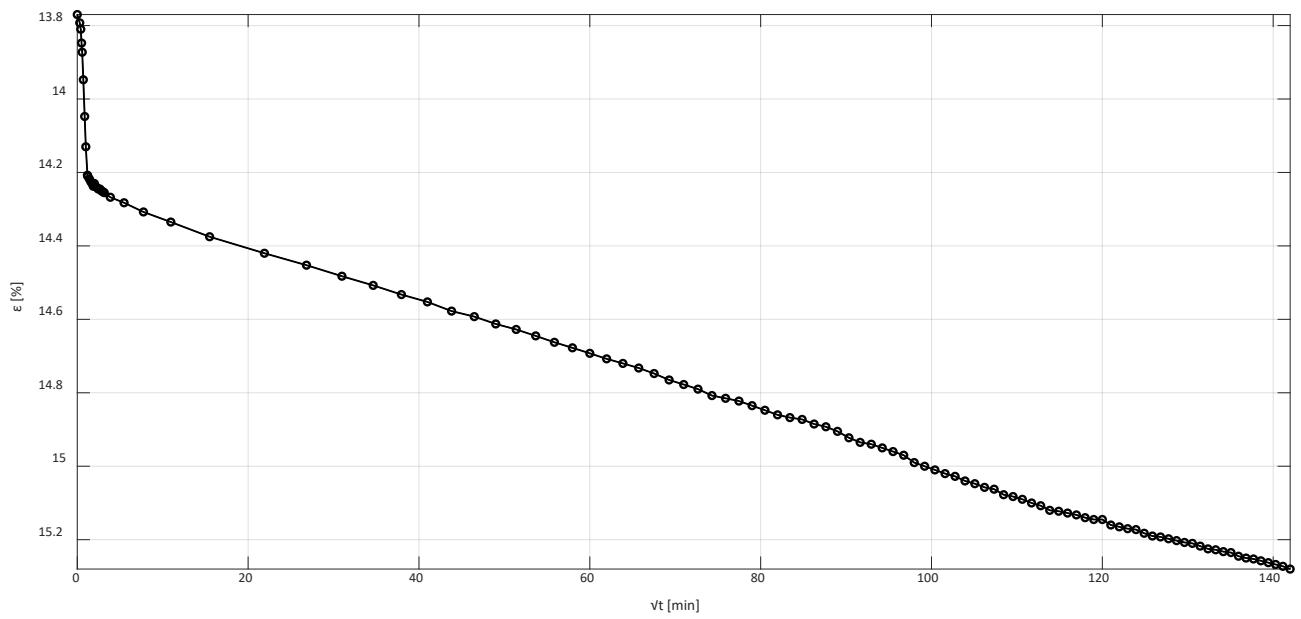


- Phase 18 – $\sigma' = 0$ kPa

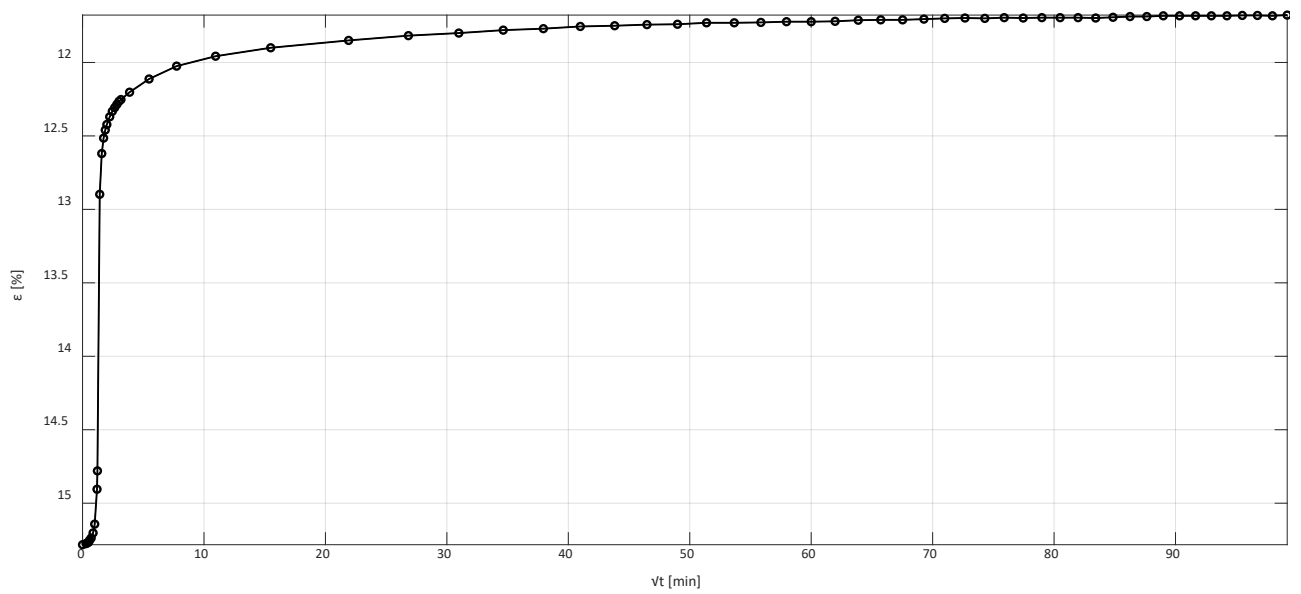


Test 1704CON1201 – Load steps

The results of each load step of Test 1704CON1201 is shown in a $\sqrt{t}$ [min] - ε [%] graph.


- Phase 1 – $\sigma' = 31$ kPa

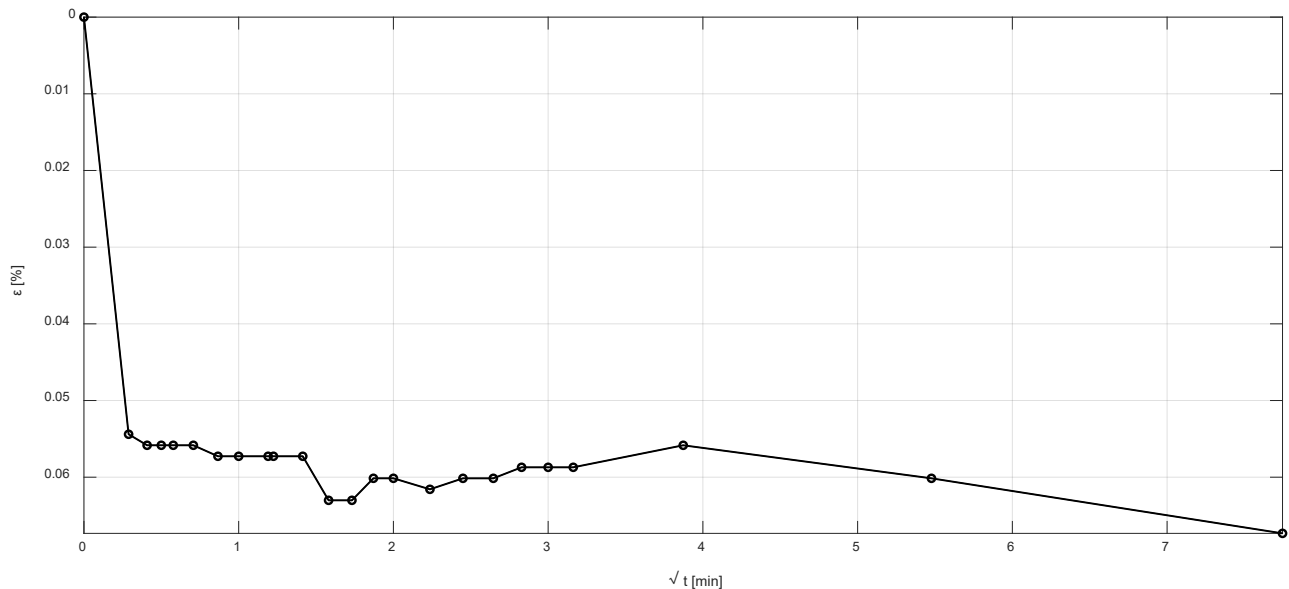


- Phase 2 – $\sigma' = 61$ kPa

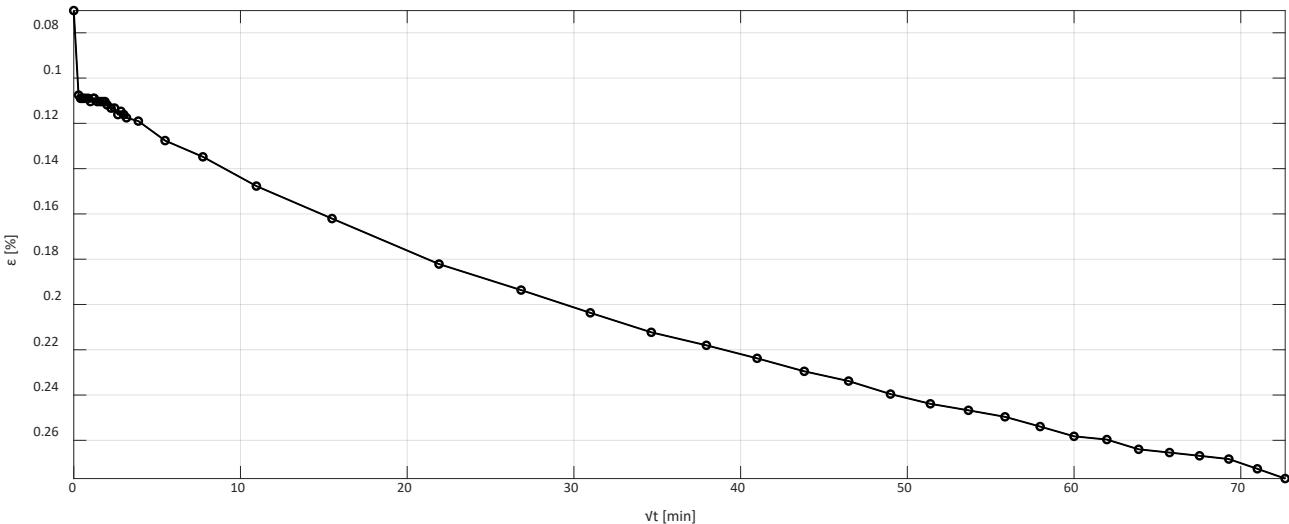


- Phase 3 – $\sigma' = 122$ kPa

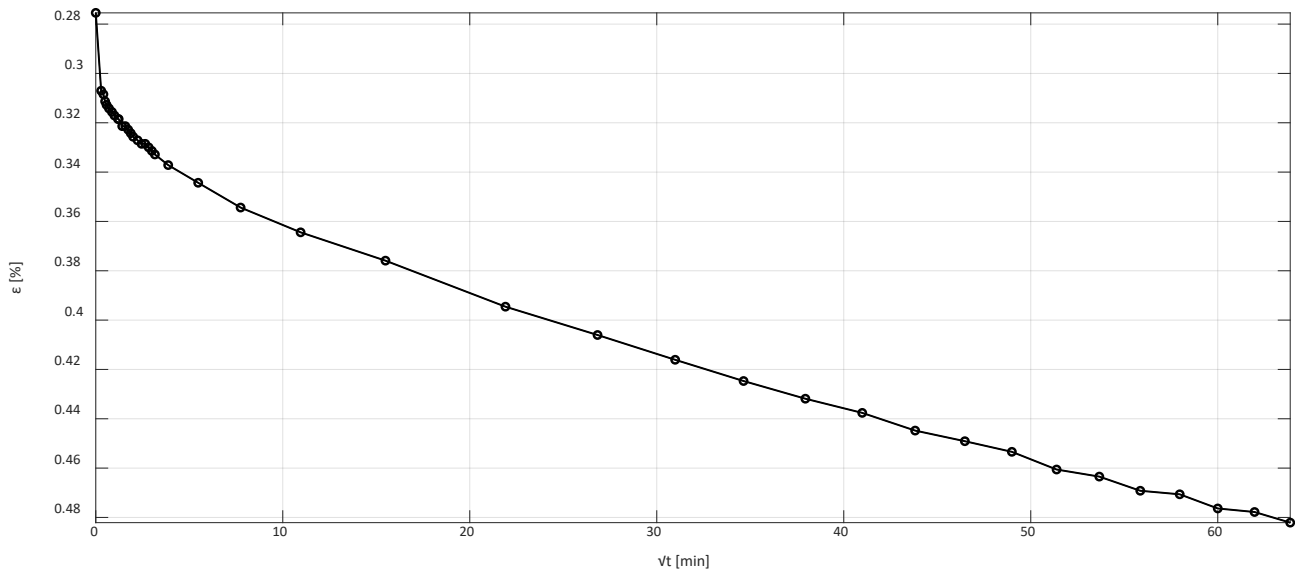


- Phase 4 – $\sigma' = 255$ kPa

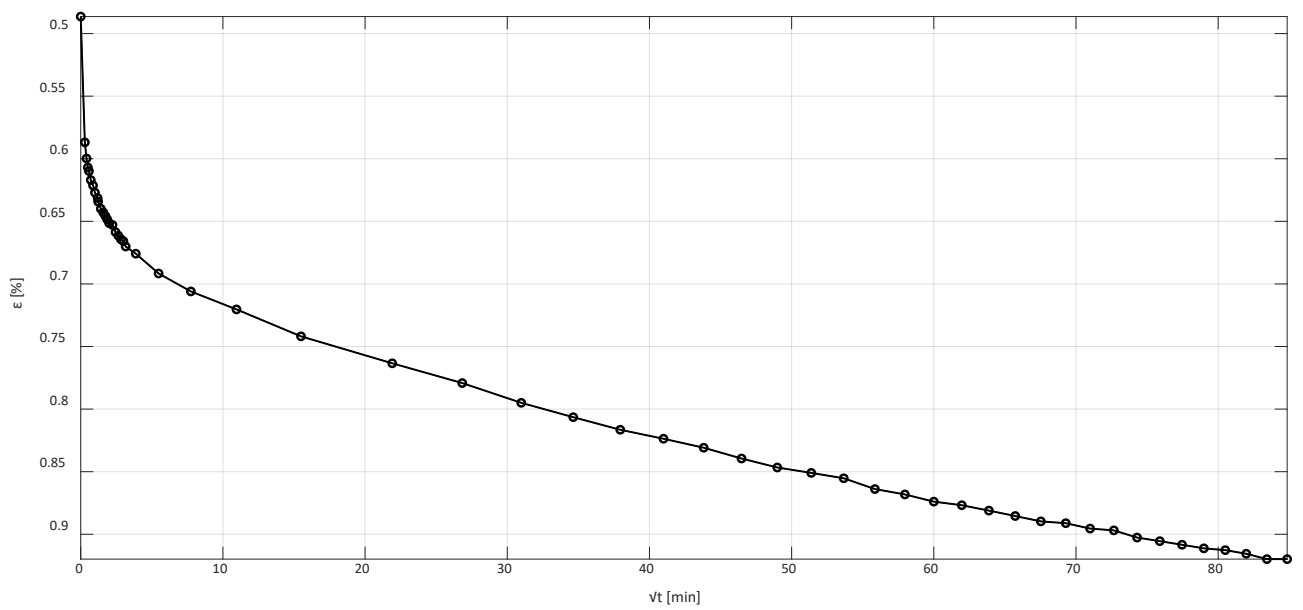


- Phase 5 – $\sigma' = 510$ kPa

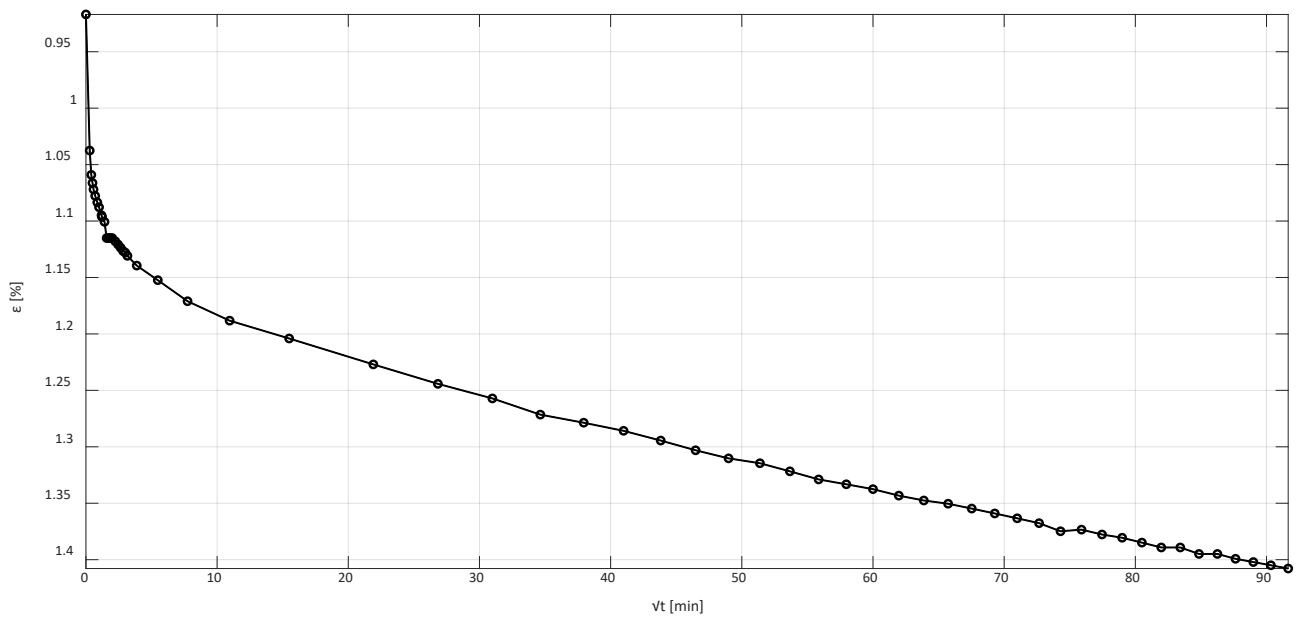


- Phase 6 – $\sigma' = 1019$ kPa

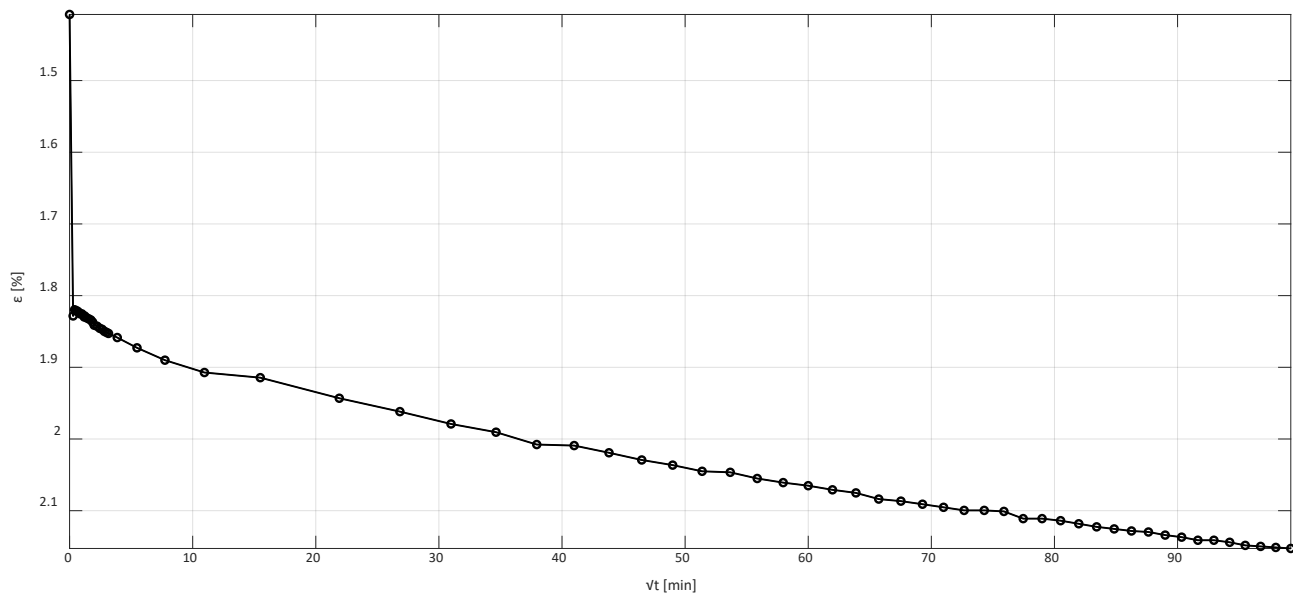


- Phase 7 – $\sigma' = 2039$ kPa

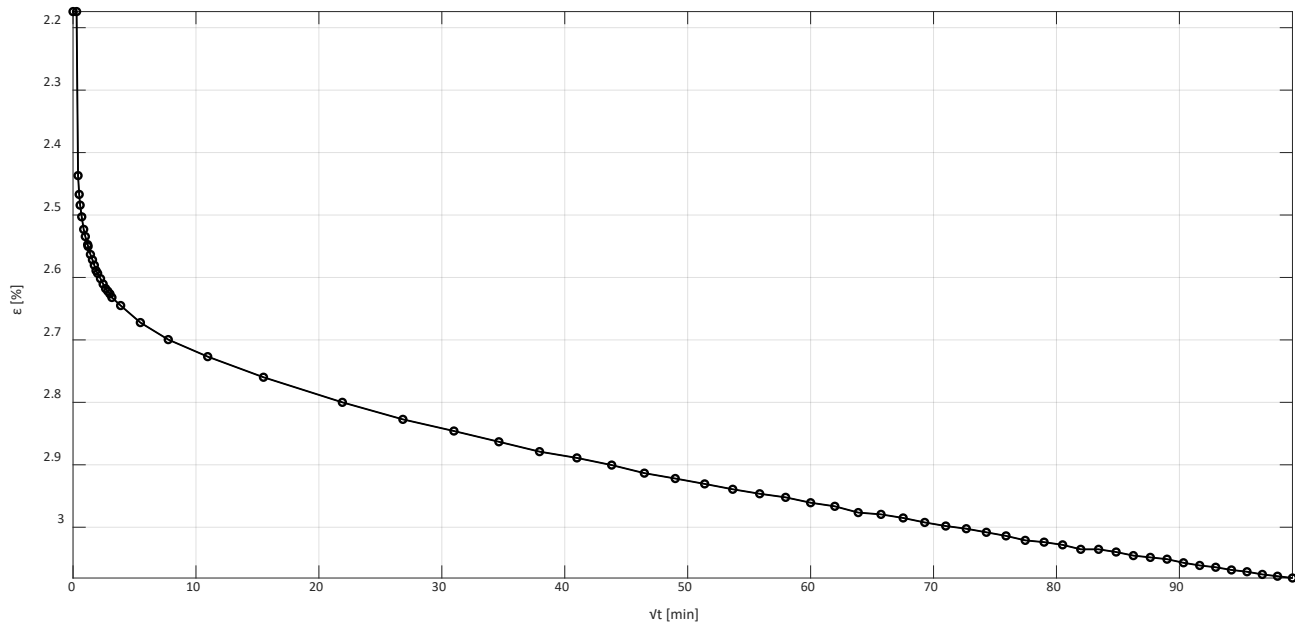


- Phase 8 – $\sigma' = 3567$ kPa

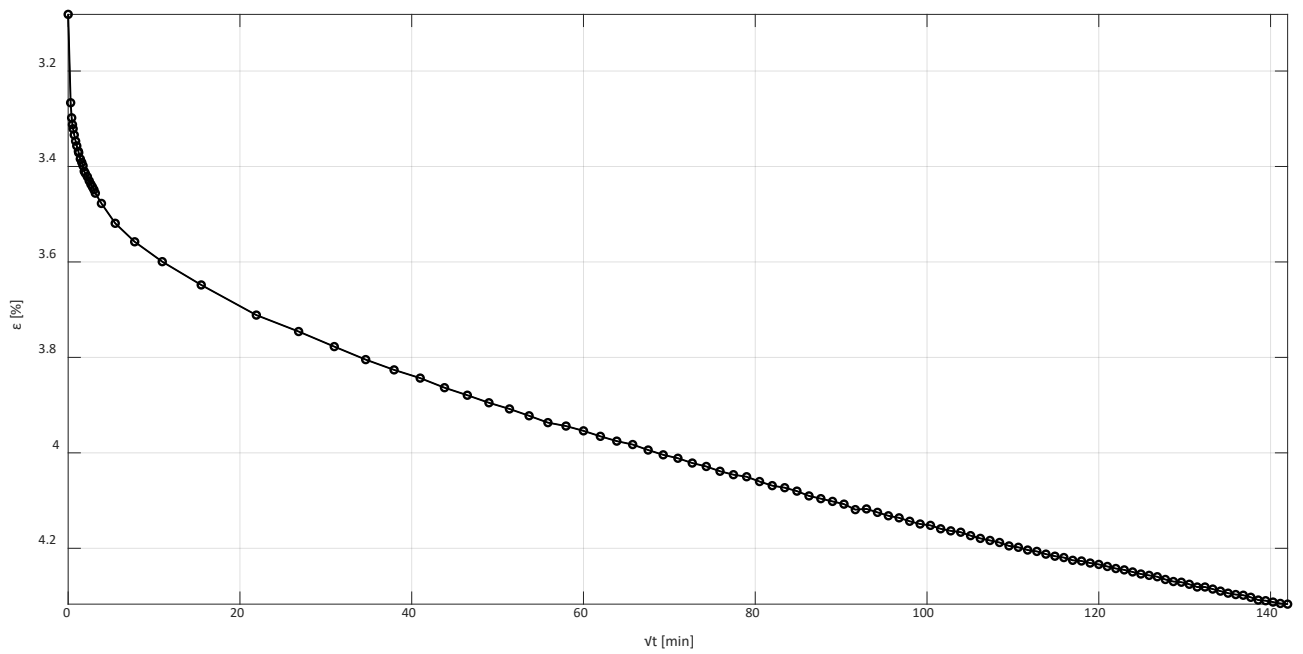


- Phase 9 – $\sigma' = 7135$ kPa

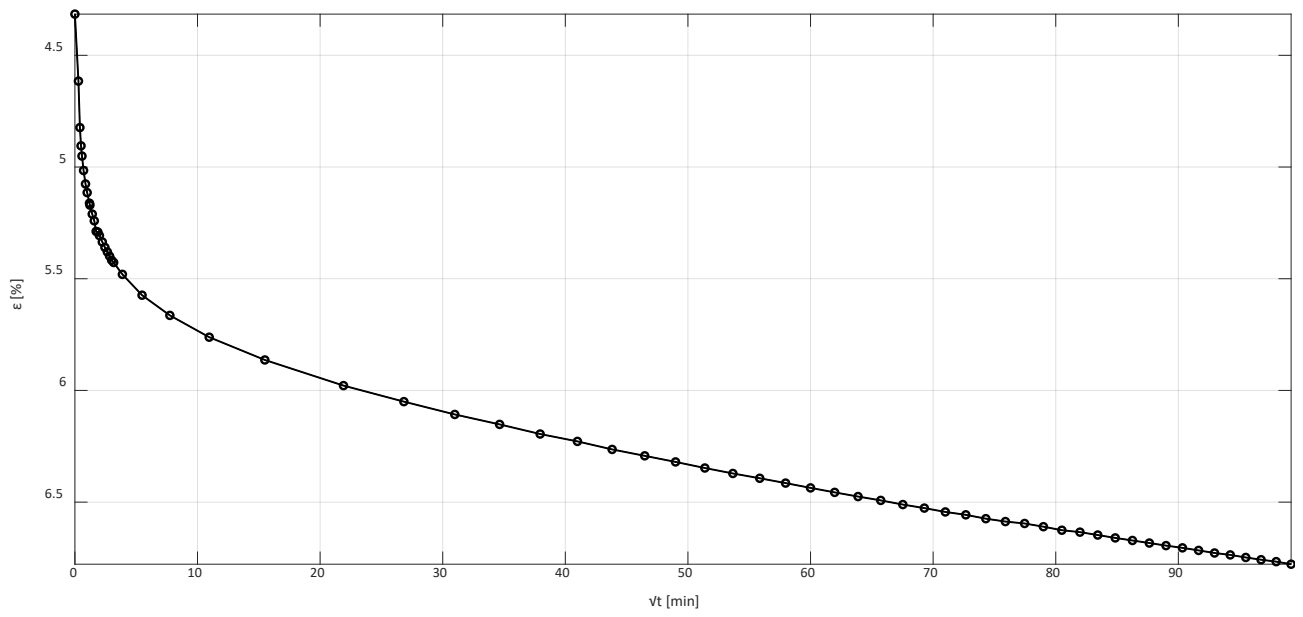


- Phase 10 – $\sigma' = 14270$ kPa

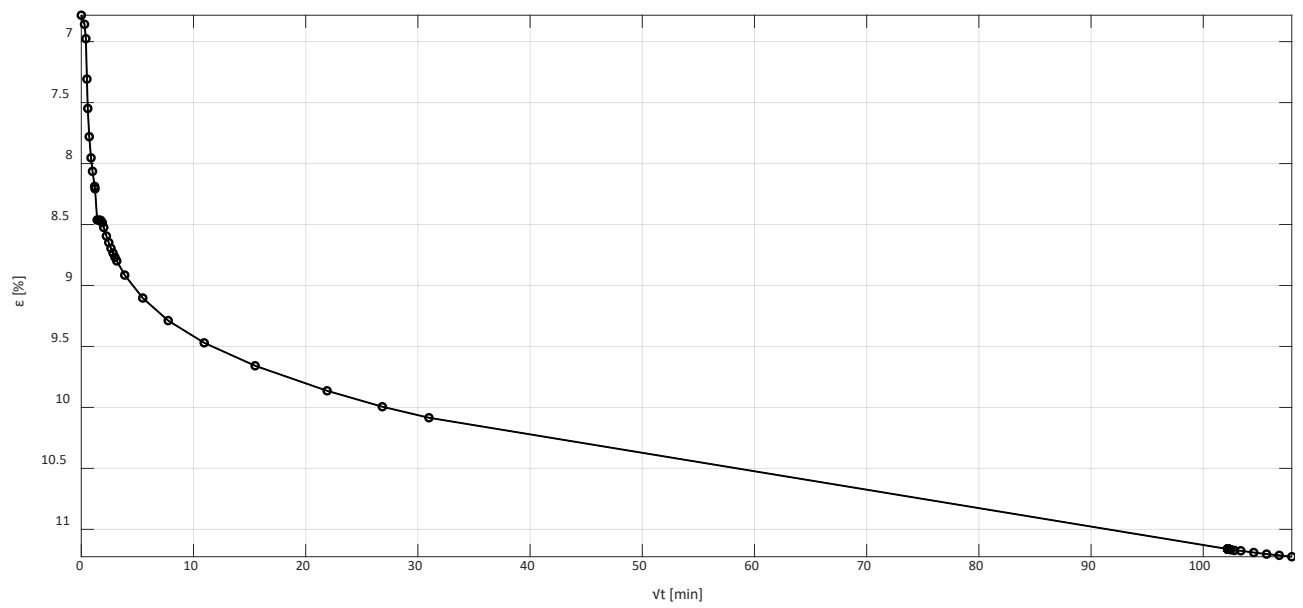


- Phase 11 – $\sigma' = 28540$ kPa

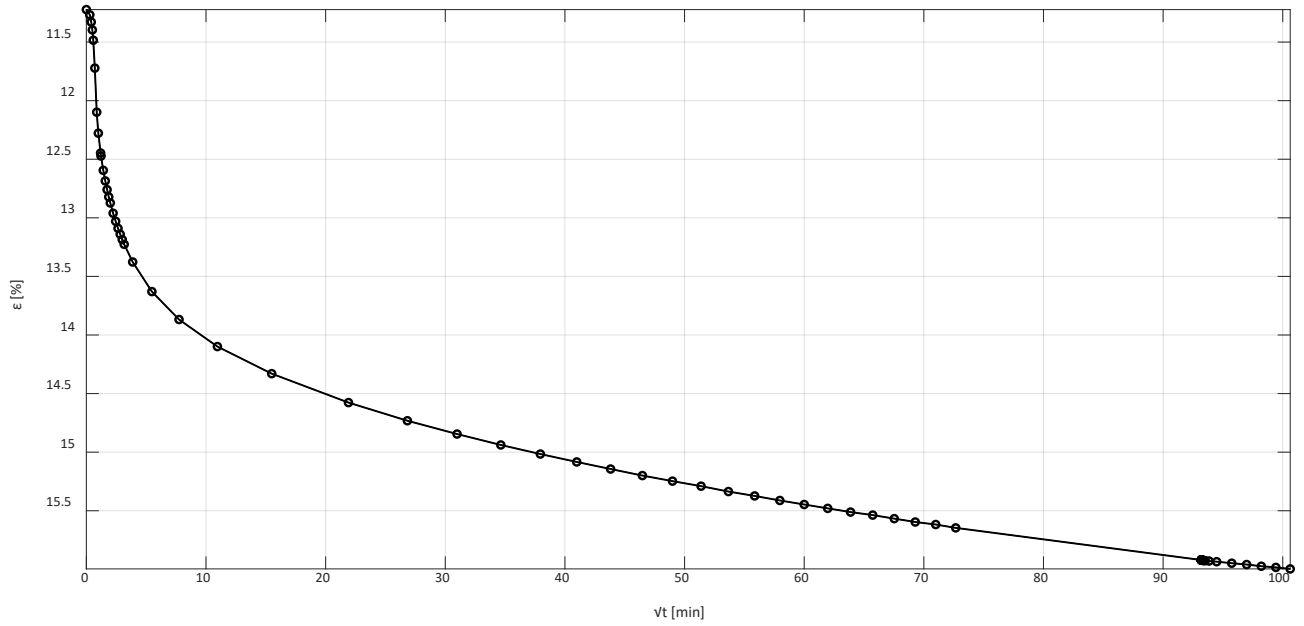


- Phase 12 – $\sigma' = 7135$ kPa

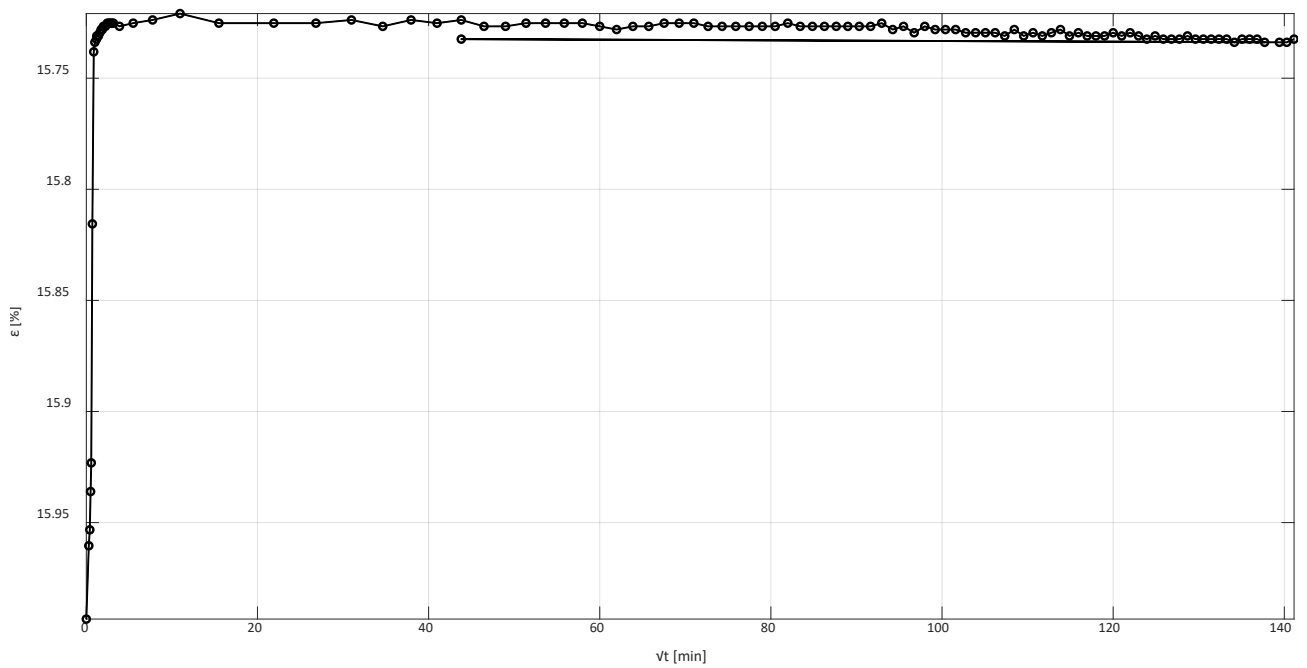


- Phase 13 – $\sigma' = 2039$ kPa

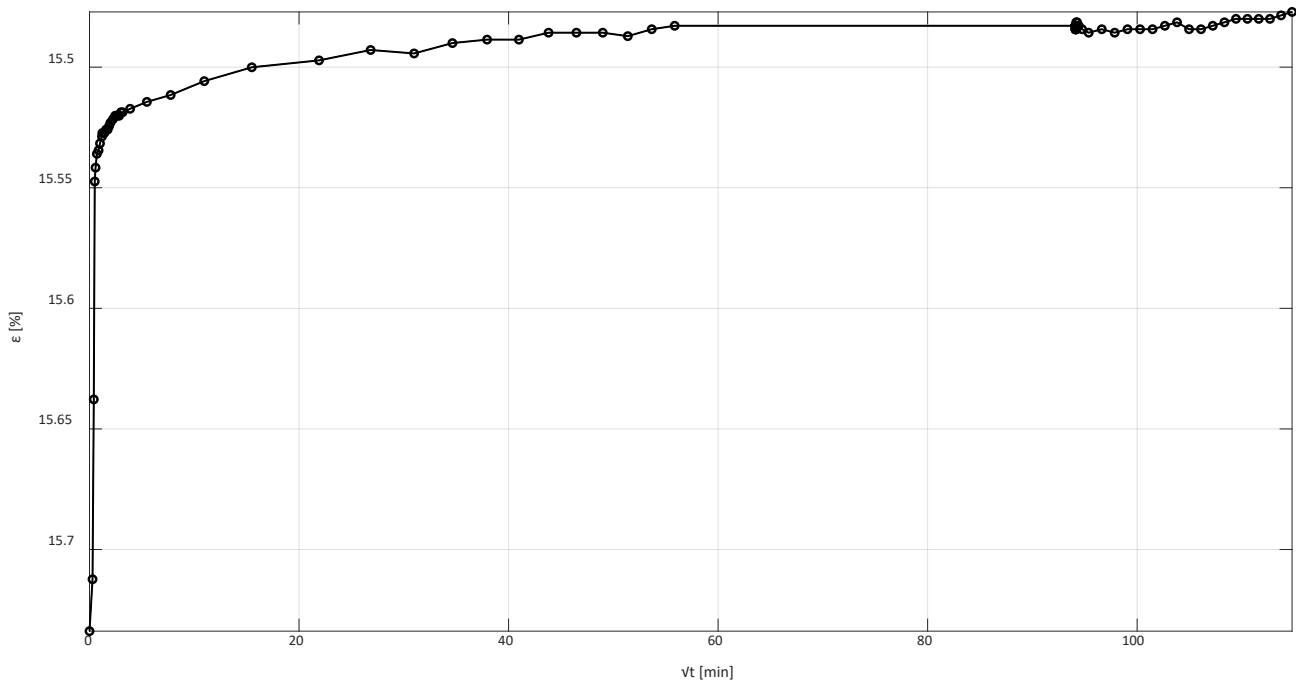


- Phase 14 – $\sigma' = 510$ kPa

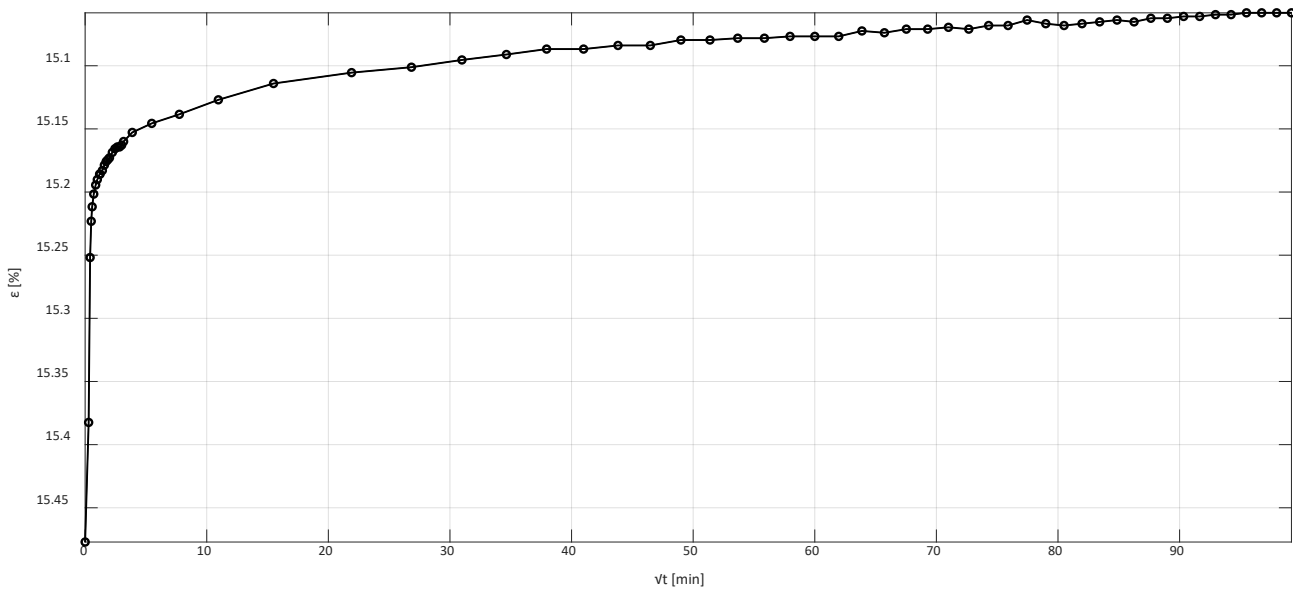


- Phase 15 – $\sigma' = 122 \text{ kPa}$

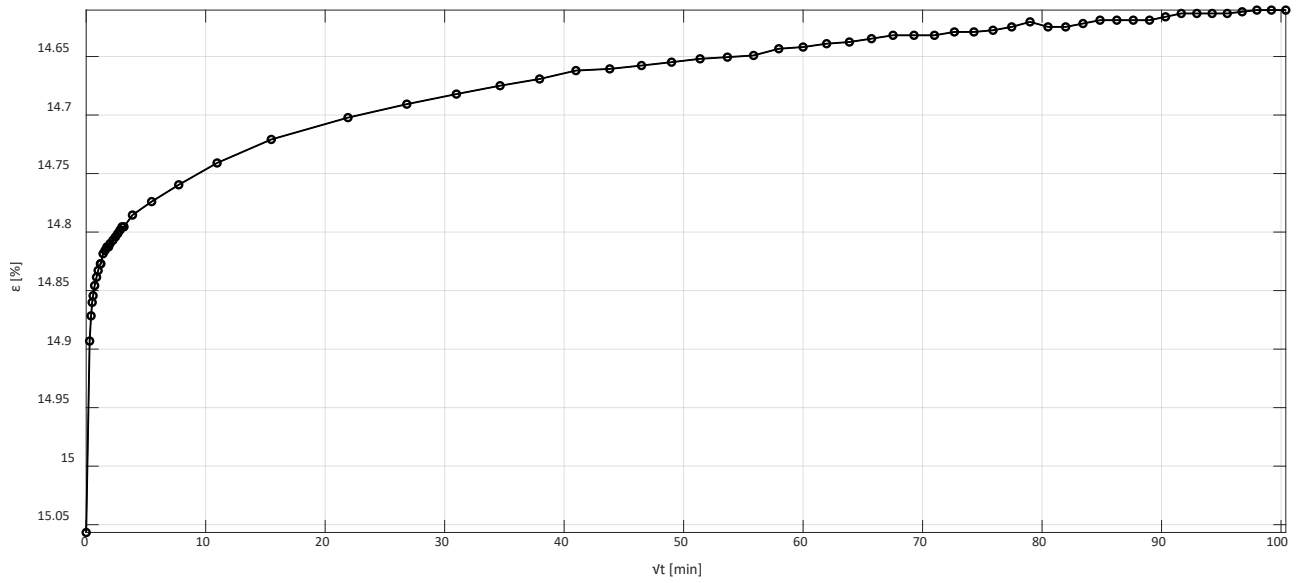


- Phase 16 – $\sigma' = 510 \text{ kPa}$

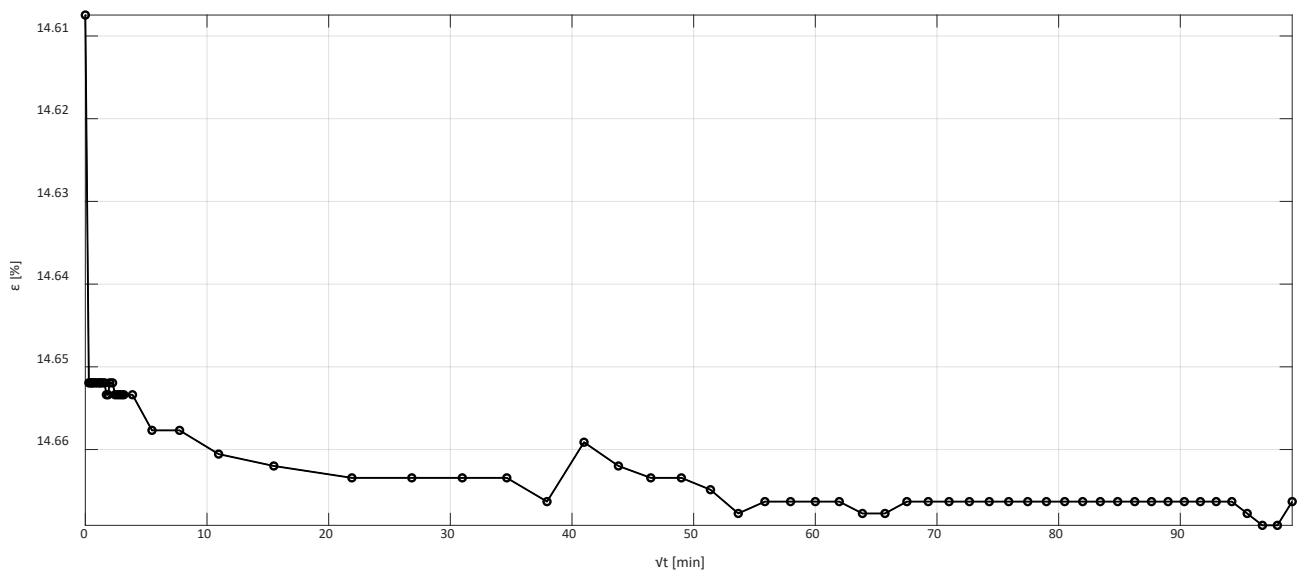


- Phase 17 – $\sigma' = 2039$ kPa

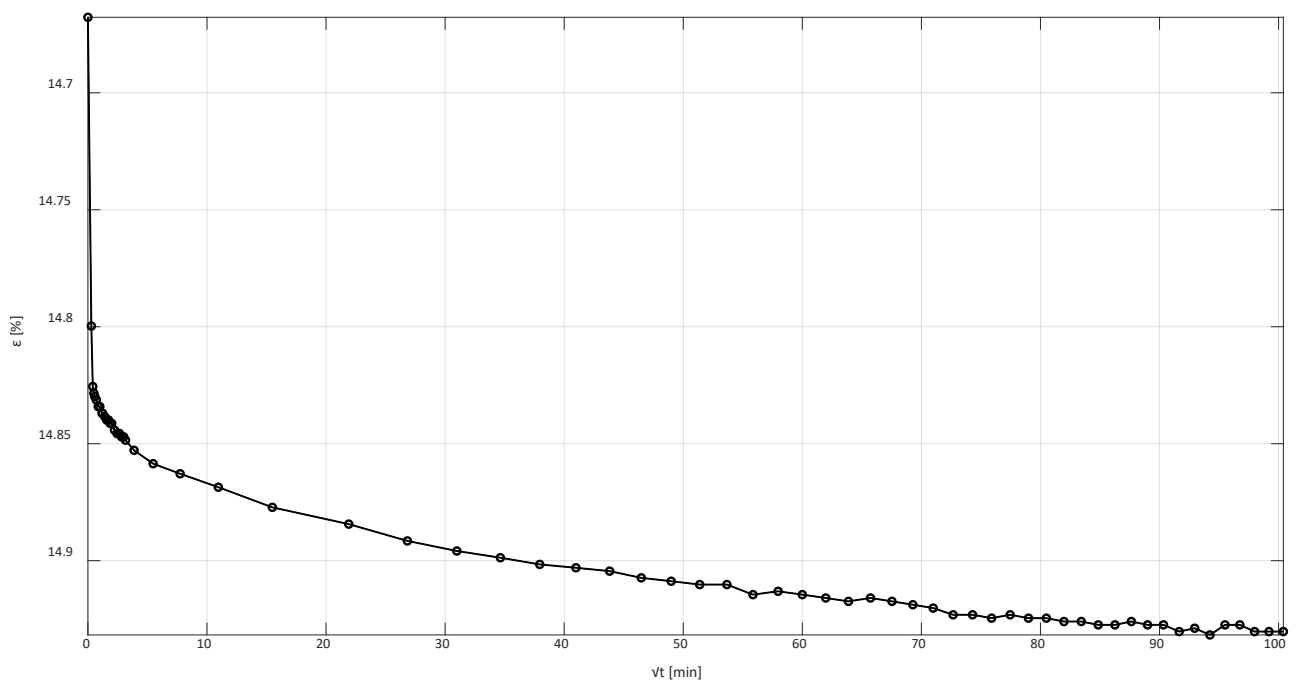

- Phase 18 – $\sigma' = 7135$ kPa

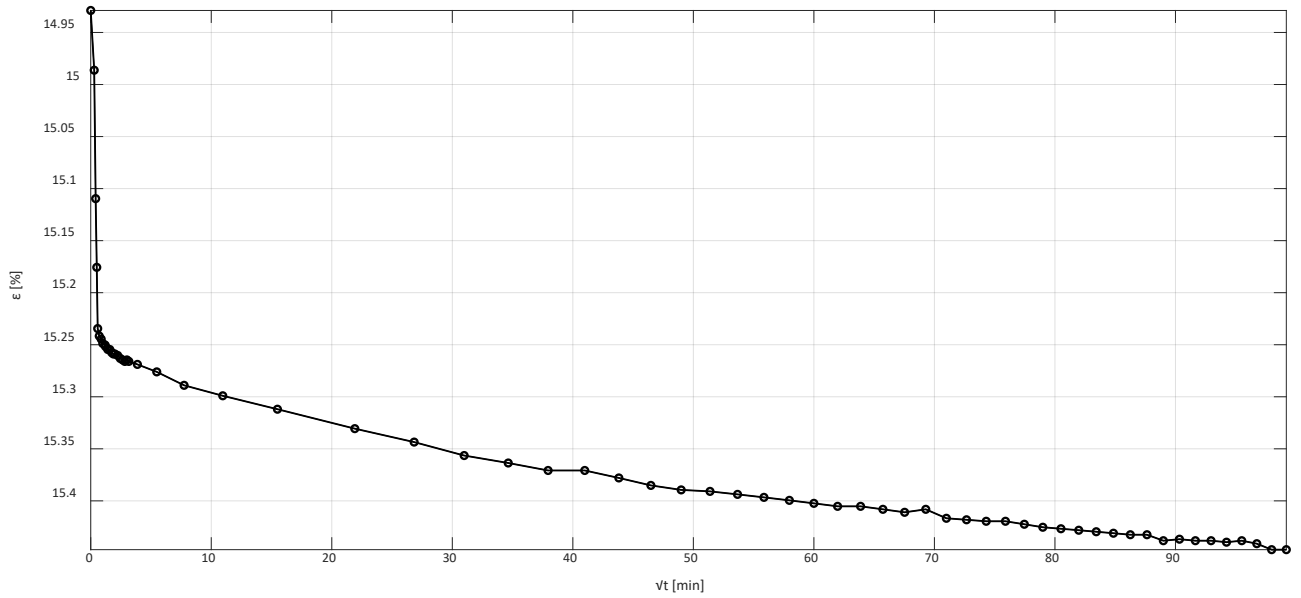

- Phase 19 – $\sigma' = 28540$ kPa

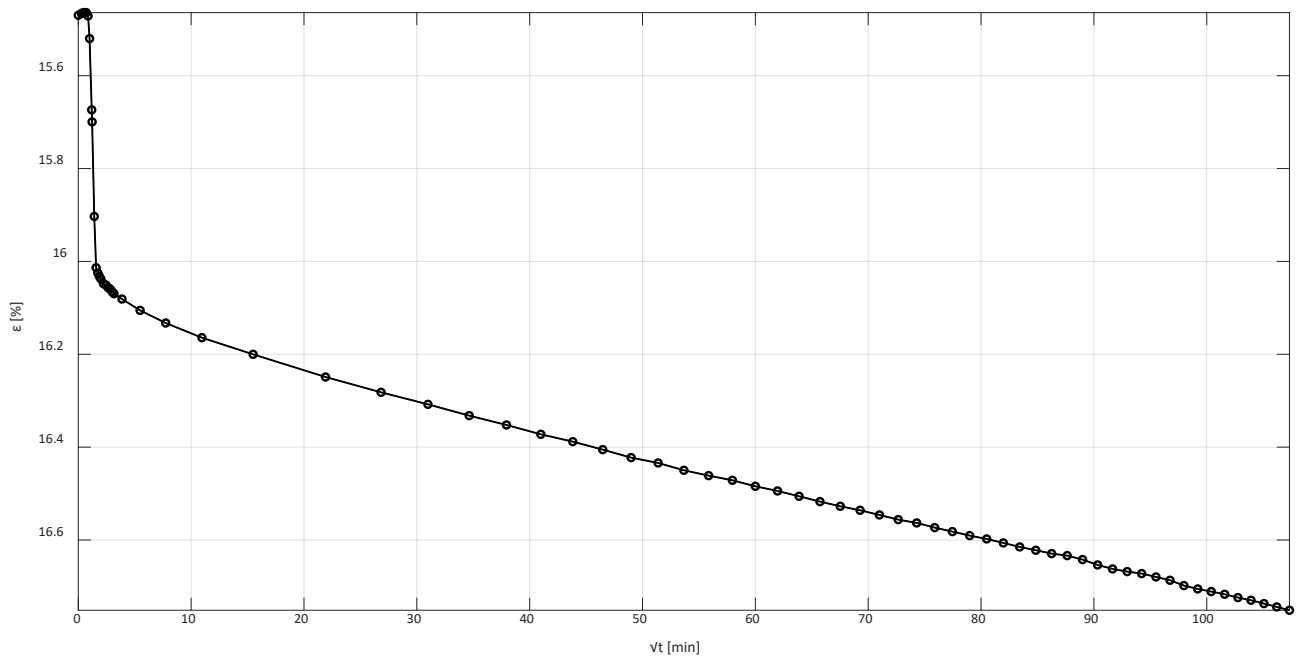

- Phase 20 – $\sigma' = 0$ kPa

